

Customer Code: \_\_\_\_\_

# DATASHEET

DAPU P/N: DPZ7566M000033A2

DAPU			Customer Approval
Drew	Audited	Approved	Stamp, please! Thanks!
Jack	David	William	
Date: 2023.04.23			

## Guangdong Dapu Telecom Technology Co.,Ltd

Building 5, No.24, Industrial East Road, Songshanhu Park, Dongguan, Guangdong, P.R. China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098




## 1、 Electrical Parameters

MODEL: DPZ7566M000033A2							
No.	Parameters	SYM.	Electrical Spec.				Notes
			Min.	Typ.	Max.	Units	
1	Nominal Frequency	FL	66.00			MHz	
2	Frequency Tolerance	-	-20		+ 20	$\times 10^{-6}$	At 25°C
3	Frequency Stability	-	-25		+ 25	$\times 10^{-6}$	Over Operating Temperature Range (Reference 25°C)
4	Operating Temperature	Topr	-55	~	+ 85	°C	
5	Storage Temperature	Tstg	-55	~	+ 125	°C	
6	Supply Voltage	V <sub>DD</sub>	3.135	3.3	3.465	V	
7	Input Current	I <sub>cc</sub>			20	mA	
8	Output waveform	-	CMOS				
9	Output Load	CL		15		pF	
10	Output Voltage High	V <sub>OH</sub>	90%			V <sub>DD</sub>	
11	Output Voltage Low	V <sub>OL</sub>			10%	V <sub>DD</sub>	
12	Rise/Fall Time	Tr、 Tf			6	ns	10%-90% V <sub>DD</sub> Level
13	Aging	-	-3		+ 3	$\times 10^{-6}$	First Year at 25°C
14	Tri-State Output Enable	-	70%			V <sub>DD</sub>	Pin 1, OE
15	Tri-State Output Disable	-			30%	V <sub>DD</sub>	Pin 1, OE
16	Duty Cycle	-	45	~	55	%	




## 2、 Mechanical Structure(mm)

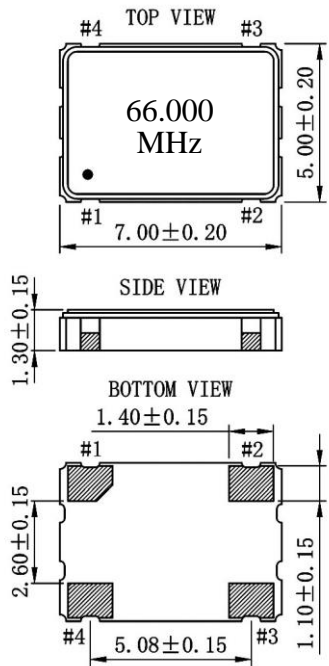

### PAD CONNECTIONS


PAD	FUNCTION
#1	Tri-State or N/C
#2	GND
#3	R. F. Output
#4	+VDC

### RECOMMENDED SOLDER PAD LAYOUT

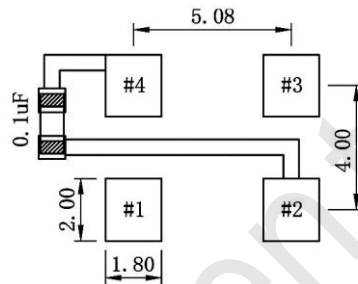

To ensure optimal oscillator performance, place a by-pass capacitor of 0.1uF as close to the part as possible between +VDC and GND pads.

## 3、 Test Circuit

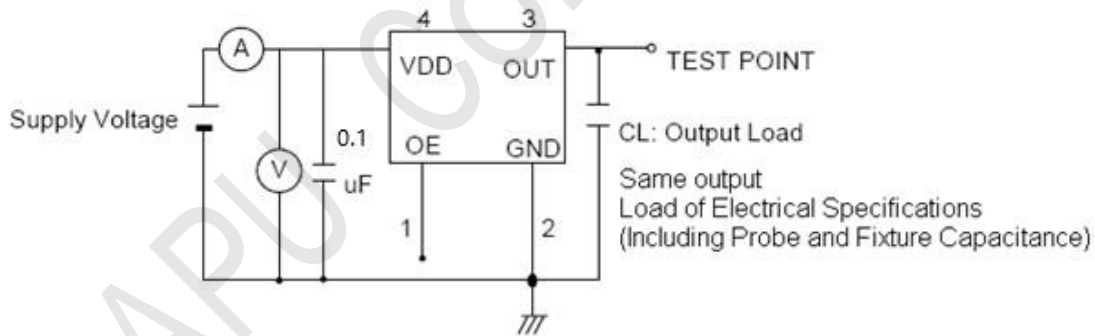


Control input (output enable/disable)

Logic 1 or open on pad 1: Oscillator output

Logic 0 on pad 1 : Disable output to high impedance



#### 4、 Output Waveform(CMOS Load)

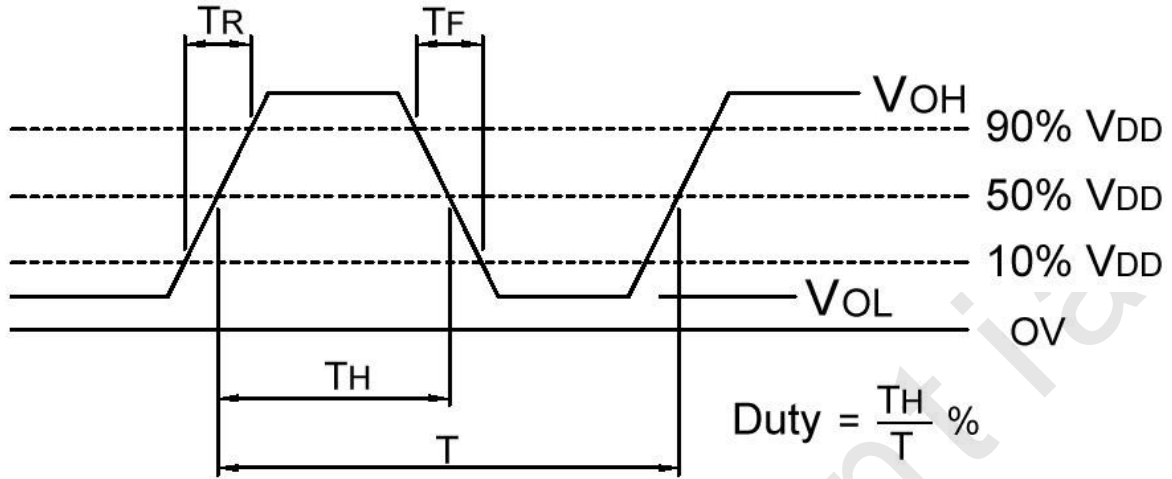

#### 5、 Reflow Soldering Curve (RoHS)

