

Customer Code : _____

DATASHEET

DAPU P/N: CM66K-D129-10.00MHz-3G-I

Customer P/N: _____

DAPU			Customer Approval
Drew	Audited	Approved	Stamp, please! Thanks!
Date: 2024.07.01			

Guangdong Dapu Telecom Technology Co.,Ltd

Building 5, No.24, Industrial East Road, Songshanhu Park, Dongguan, Guangdong, P.R. China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



1. Electrical Parameters

	PARAMETERS						NOTES
	Internal Receiver Characteristics	Type	Auto Position Lock				
Number Of Channels		50					
Frequency Band		GPS L1C/A, GLONASS L1OF, Galileo E1B/C					
Tracking Code		C/A Code					
Tracking Capability		12 Satellites					
Sensitivity		Tracking & Navigation		-159dBm			
		Acquisition		-144dBm			
Antenna INPUT		SMA-KE				CN1	
State Input	Parameters	Min.	Typ.	Max.	Unit.		
	Lock	2.7			V	<5mA Load	
	Holdover			0.4	V	<5mA Load	
	Connector	Pin 8					
RF Output	Parameters	Min.	Typ.	Max.	Unit.	Test Condition	
	Nominal Frequency	10.00			MHz		
	Waveform	HCMOS					
	High-level Output Voltage (V _{OH})	2.7			V	< 5mA Load	
	Low-level Output Voltage (V _{OL})			0.4	V	< 5mA Load	
	Rise/Fall Time			8	ns	< 5mA Load	
	Duty Cycle	45	50	55	%	< 5mA Load	
	Accuracy	-1		+1	×10 ⁻¹²	24 hours average when locked to 1 PPS	
	Short-term Stability			0.02	×10 ⁻⁹	Temperature stability, no EMI/EMC or other interference, test after power for 1 hour ref. to 25°C; 1s, using PN9000 equipment.	
	Aging Tolerance Per Day	-0.2		+0.2	×10 ⁻⁹	V _{cc} , T _A constant measurement referenced to frequency observed with T _A =25°C, V _{cc} =5.0V, in FREE RUN condition and after 30 days of	
Aging Tolerance 1 Year	-0.01		+0.01	×10 ⁻⁶			







	Phase Noise (All conditions)		-118	-113	dBc/Hz	operation.
			-138	-133		10Hz
			-148	-143		100Hz
			-150	-145		1KHz
			-150	-145		10KHz
			-150	-150		100KHz
	Connector	Pin 2		1MHz		
GPS 1PPS Output	Parameters	Min.	Typ.	Max.	Unit.	Test Condition
	Waveform	HCMOS				
	High-Level Output Voltage (V _{IH})	2.7			V	15pF
	Low-Level Output Voltage (V _{IL})			0.4	V	
	Pulse Width		100		ms	
	Connector	Pin 10				
State Output	Parameters	Min.	Typ.	Max.	Unit.	
	Lock	2.7			V	<5mA Load
	Holdover			0.4	V	<5mA Load
	Connector	Pin 5				
Holdover Capability	Holdover Time	Min.	Typ.	Max.	Unit.	
	24 hours	-1.5		+1.5	μs	ΔT=±5°C, 24 hours holdover after turn on 7days and GPS lock 3days. Temperature variable speed less than 1°C per minute
Supply Voltage	Parameters	Min.	Typ.	Max.	Unit.	
	Supply voltage	4.75	5.0	5.25	V	
	Current consumption			2000	mA	During Warm-up
				1000	mA	During steady state operation @25°C
	AC ripple			50	mVpk-pk	10Hz to 1MHz
Connector	Pin 12					
1 PPS Output Waveform Characteristics	Parameters	Min.	Typ.	Max.	Unit.	
	Waveform	HCMOS				
	High-Level Output Voltage(V _{OH})	2.7			V	15pF



	Low-level Output voltage (V _{OL})			0.4	V	
	Pulse width		100		ms	
	Connector	Pin 3				
Serial Interfaces	Parameters	Min.	Typ.	Max.	Unit.	
	Rx high-level input voltage (V _H)	2.7			V	
	Rx low-level input voltage (V _L)			0.4	V	
	Tx high-level output voltage (V _H)	2.7			V	
	Tx low-level output voltage (V _L)			0.4	V	
	Data format	NMEA-0183				
	Serial protocol	9600-N-8-1				
	Connector	Pin6 and Pin7				
Environmental Conditions	Parameter	Conditions				
	Operating temperature	-20°C to +75°C				
	Storage Temperature	-55°C to +105°C				
	Storage humidity	30%~80%				
	ESD Level	Human Body Model,class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010.				
		Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010.				
	Moisture Sensitivity Level	Not humidity sensitive.				
	Vibration	Test Condition: 0.75mm ;acceleration:10g;10Hz~500Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X , Y , Z), IEC 68-2-06 Test Fc.				
Shock	50g; 11ms; half sine wave (3 times for each 3 directions X , Y , Z),IEC 68-2-27 Test Ea/Severity 50A.					
Full Package Storage	Relative Humidity (%)	20%~70%				
	Temperature (°C)	-10~35°C				



2. Mechanical Structure(mm)

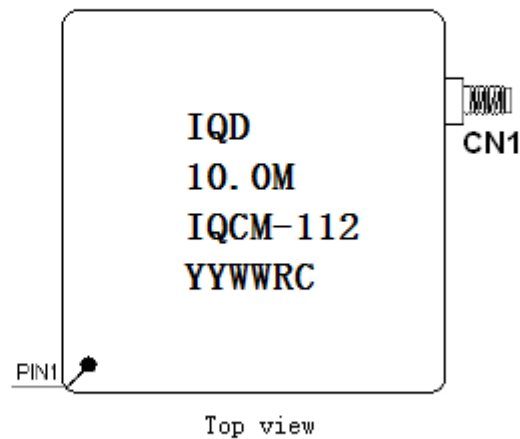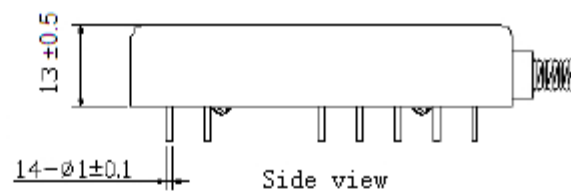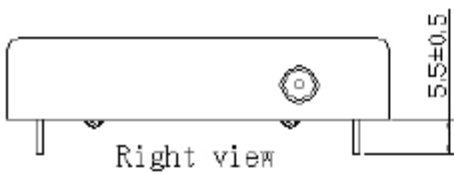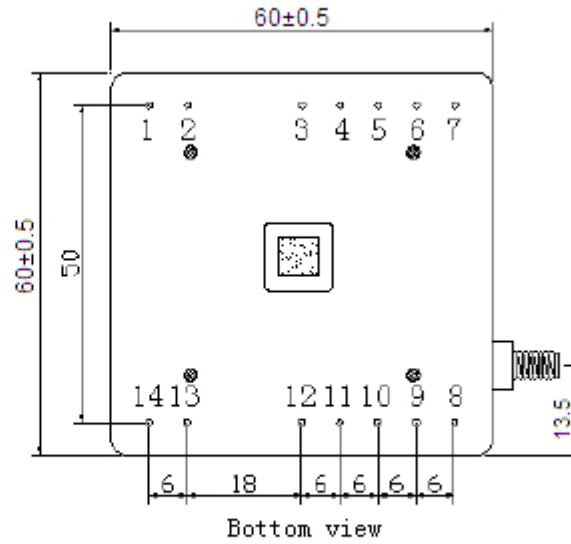

Note1: Tolerance $\pm 0.20\text{mm}$ without mark


Note2: The first two xx representative: week
After two xx representative: year

Note3: Referential Weight $82 \pm 10\text{g}$




PIN DEFINITION		
PIN	NAME	DESCRIPTION
2	10MHz OUTPUT	10MHz OCXO frequency output .
3	1PPS OUTPUT	The clock module 1PPS output .
5	State OUTPUT	State output. Output high level when the CM is locked and stable, others low level.
6	RX INPUT	Asynchronous serial data input. 9600-N-8-1.
7	TX OUTPUT	Asynchronous serial data output. 9600-N-8-1.
8	State INPUT	H: Lock Enable The work state is set to normal operation when the state input is high.
		L: Lock Disable The module cannot be locked when the state input is low level.
10	1PPS OUTPUT	1PPS from the internal GPS/GLONASS/Galileo receiver.
12	VCC	Power supply input, 4.75V to 5.25V.
1、14	NC	Not connected.
4、9、11、13	GND	GND

3. Reflow Soldering Curve (RoHS)

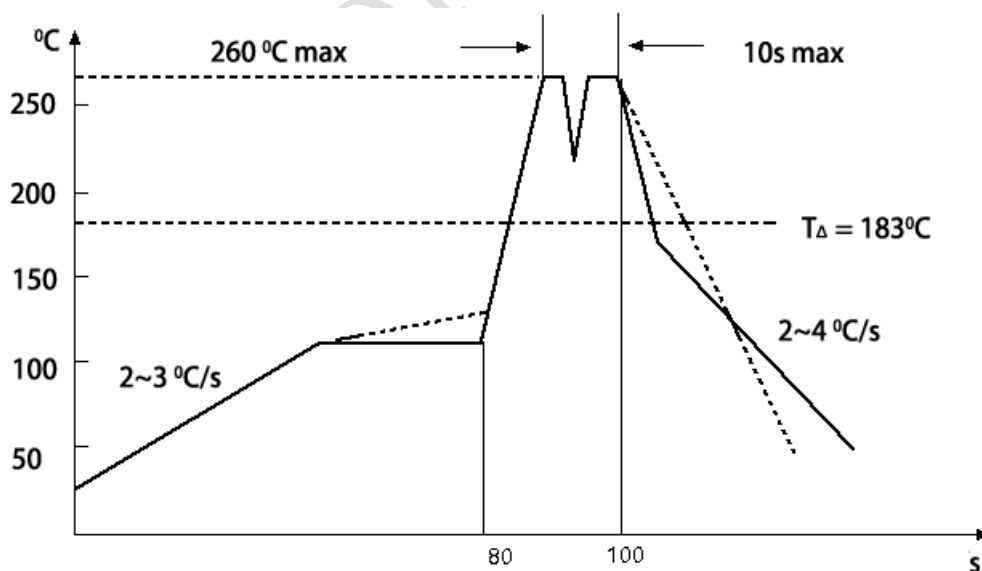



4. Package (mm)

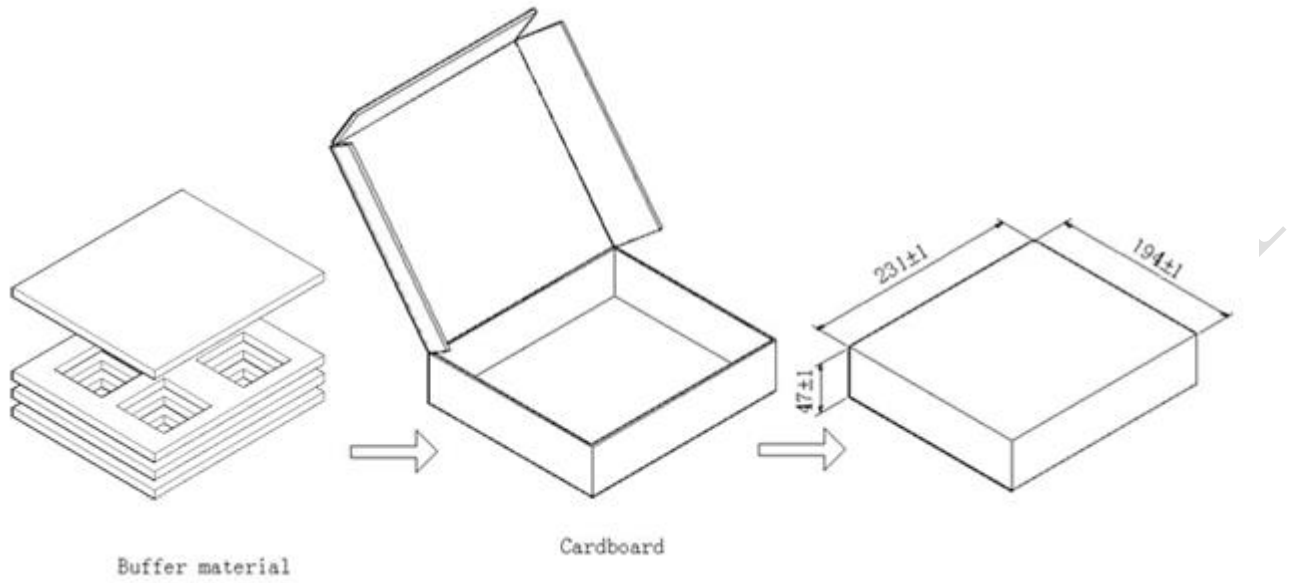

DAPU Confide