

Travelling Merchant: _____

DATASHEET

Standard: CM66G-F119-10.00MHz

P/N: _____

Plot			The Label
Drew	Audited	Approved	
Date: 2022.08.03			
			Stamp, please! Thanks!

Guangdong Dapu Telecom Technology Co.,Ltd

Building 5, No.24, Industrial East Road, Songshanhu Park, Dongguan, Guangdong, P.R. China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



1. Electrical Parameters

	PARAMETERS						NOTES
	Internal Receiver Characteristics	Type	Auto Position Lock				
Number Of Channels		50					
Frequency Band		L1 (1575.42 MHz)					
Tracking Code		C/A Code					
Tracking Capability		12 Satellites					
Sensitivity		Tracking & Navigation	-162dBm				
		Reacquisition	-157dBm				
		Cold Start (Autonomous)	-148dBm				
Antenna INPUT	SMA-KE				CN1		
State Input	Parameters	Min.	Typ.	Max.	Unit.		
	Lock	2.7			V	<5mA Load	
	Holdover			0.4	V	<5mA Load	
	Connector	Pin 8					
RF Output	Parameters	Min.	Typ.	Max.	Unit.	Test Condition	
	Nominal Frequency	10.00			MHz		
	Waveform	Sine wave					
	Level	6		10	dBm		
	Load	50			Ω		
	Harmonics Suppression			-30	dBc		
	Spurious Suppression			-60	dBc		
	Accuracy	-1		+1	$\times 10^{-12}$	24 hours average when locked to 1 PPS	
	Short-term Stability			0.005	$\times 10^{-9}$	Temperature stability, no EMI/EMC or other interference, test after power for 1 hour ref. to 25°C; 1s.	
	Aging Tolerance Per Day	-0.2		+0.2	$\times 10^{-9}$	V_{cc}, T_A constant measurement referenced to frequency observed with $T_A=25^\circ\text{C}, V_{cc}=5.0\text{V}$, in FREE RUN condition and after 30 days of operation.	
Aging Tolerance 1 Year	-0.01		+0.01	$\times 10^{-6}$			




	Phase Noise (All conditions)	-90	-80	dBc/Hz	1Hz	
		-118	-113		10Hz	
		-138	-133		100Hz	
		-148	-143		1KHz	
		-150	-145		10KHz	
		-150	-145		100KHz	
		-150	-150		1MHz	
	Connector	Pin 2				
GPS 1PPS Output	Parameters	Min.	Typ.	Max.	Unit.	Test Condition
	Waveform	HCMOS				
	High-Level Output Voltage (V _{IH})	2.7			V	
	Low-Level Output Voltage (V _{IL})			0.4	V	
	Pulse Width		100		ms	
	Connector	Pin 10				
State Output	Parameters	Min.	Typ.	Max.	Unit.	
	Lock	2.7			V	<5mA Load
	Holdover			0.4	V	<5mA Load
	Connector	Pin 5				
Holdover Capability	Holdover Time	Min.	Typ.	Max.	Unit.	
	8 hours	-1.5		+1.5	μs	ΔT=±5°C, 8 hours holdover after turn on 7days and GPS lock 3days
	24 hours	-8.0		+8.0	μs	ΔT=±5°C, 24 hours holdover after turn on 7days and GPS lock 3days
	24 hours	-0.5		0.5	ppb	
Supply Voltage	Parameters	Min.	Typ.	Max.	Unit.	
	Supply voltage	4.75	5.0	5.25	V	
	Current consumption			2000	mA	During Warm-up
				1000	mA	During steady state operation @25°C
	AC ripple			50	mVpk-pk	10Hz to 1MHz
Connector	Pin 12					
1 PPS Output Waveform	Parameters	Min.	Typ.	Max.	Unit.	
	Waveform	HCMOS				



Characteristics	High-Level Output Voltage(V _{OH})	2.7			V	
	Low-level Output voltage (V _{OL})			0.4	V	
	Pulse width		500		ms	
	Phase Accuracy (RMS)	-30		30	ns	Steady lock status (locked time≥ 24hours)
	Connector	Pin 3				
Serial Interfaces	Parameters	Min.	Typ.	Max.	Unit.	
	Rx high-level input voltage (V _H)	2.7			V	
	Rx low-level input voltage (V _L)			0.4	V	
	Tx high-level output voltage (V _H)	2.7			V	
	Tx low-level output voltage (V _L)			0.4	V	
	Data format	NMEA-0183				
	Serial protocol	9600-N-8-1				
	Connector	Pin6 and Pin7				
Environmental Conditions	Parameter	Conditions				
	Operating temperature	-20°C to +75°C				
	Storage Temperature	-55°C to +105°C				
	Storage humidity	30%~80%				
	ESD Level	Human Body Model,class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010.				
		Machine Model, class B: 200V to 400V; JEDEC JESD22-A115C.				
Moisture Sensitivity Level	Not humidity sensitive.					
Environmental Compliance	Parameter	Conditions				
	Mechanical shock	MIL-STD-2002, Method 213 condition B				
	Mechanical vibration	MIL-STD-2002, Method 204 condition A				
	Resistance to solvents	MIL-STD-2002, Method 215				



2. Mechanical Structure(mm)

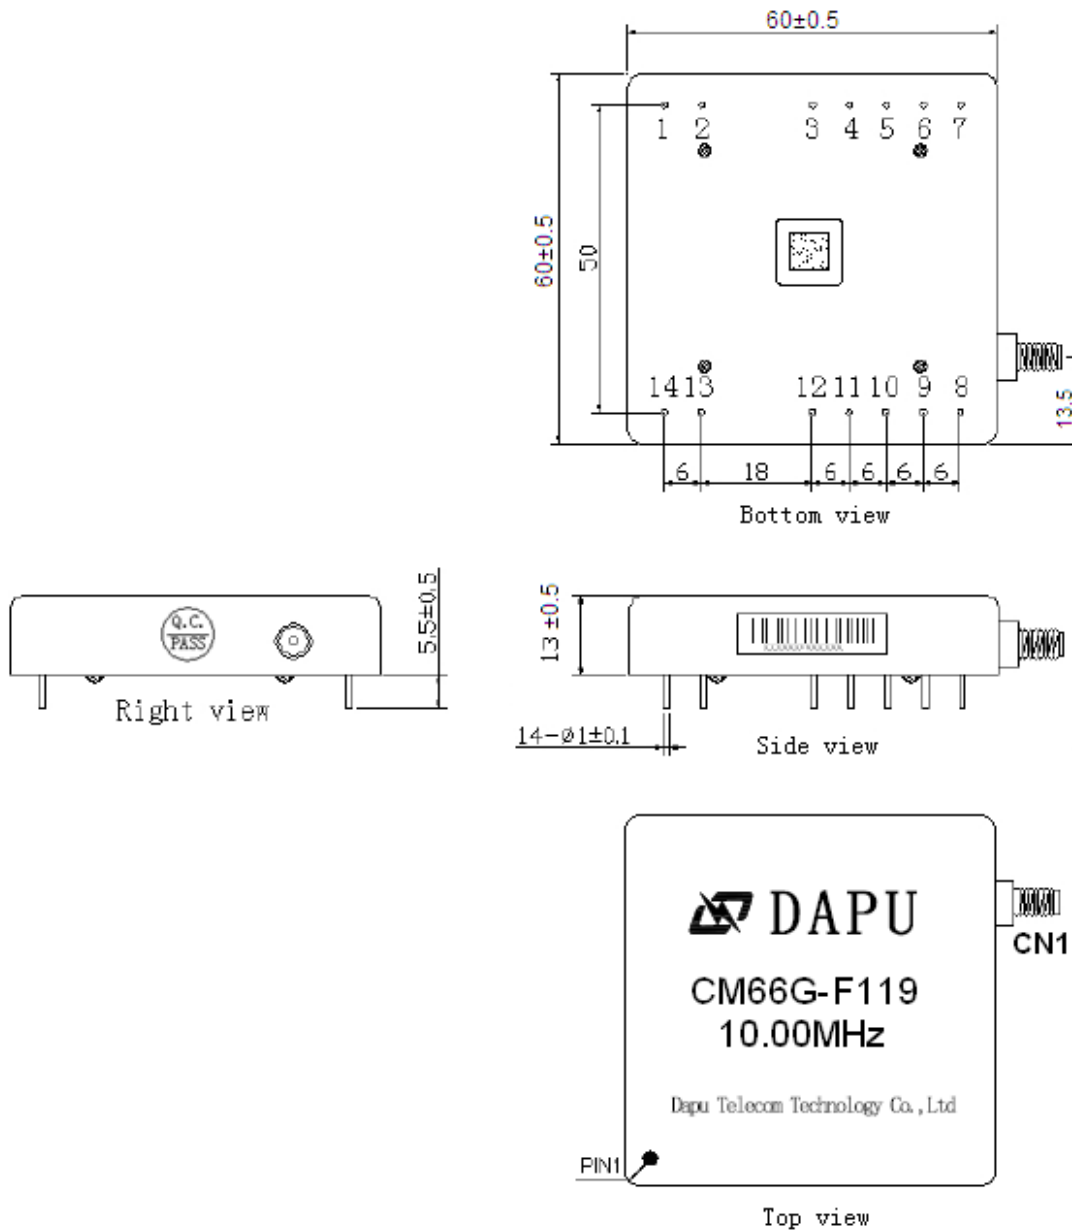


Note1: Tolerance ± 0.2 mm without mark

Note2: Referential weight 82 ± 10 g




PIN DEFINITION		
PIN	NAME	DESCRIPTION
2	10MHz OUTPUT	10MHz OCXO frequency output .
3	1PPS OUTPUT	The clock module 1 PPS output .
5	State OUTPUT	State output. Output high level when the CM is locked and stable, others low level.
6	RX INPUT	Asynchronous serial data input. 9600-N-8-1.
7	TX OUTPUT	Asynchronous serial data output. 9600-N-8-1.
8	State INPUT	The work state is set to normal operation when the state input is high.
		The work state is set to hold over when the state input is low.
10	GPS 1PPS OUTPUT	1PPS from the internal GPS receiver.
12	VCC	Power supply input, 4.75V to 5.25V.
1、14	NC	Not connected.
4、9、11、13	GND	GND

3. Reflow Soldering Curve (RoHS)

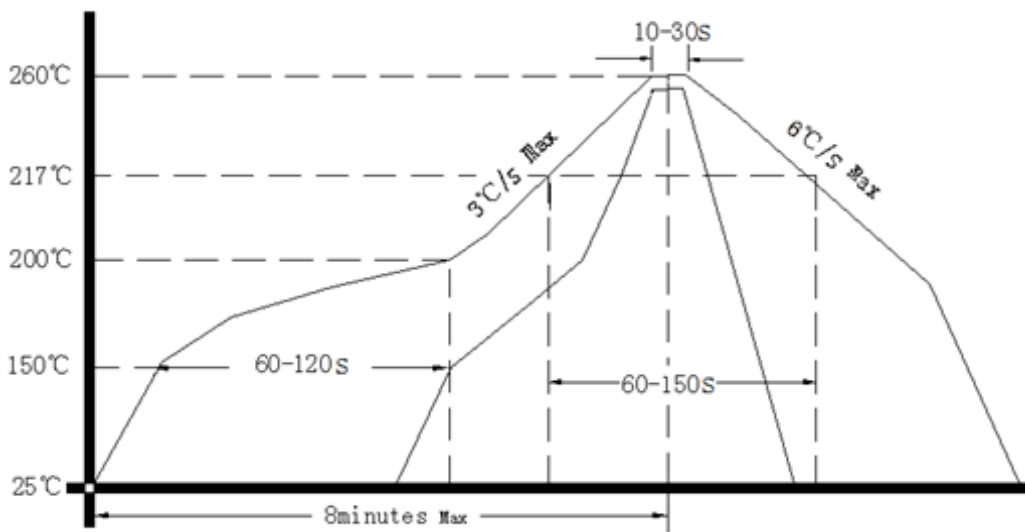



4. Package (mm)

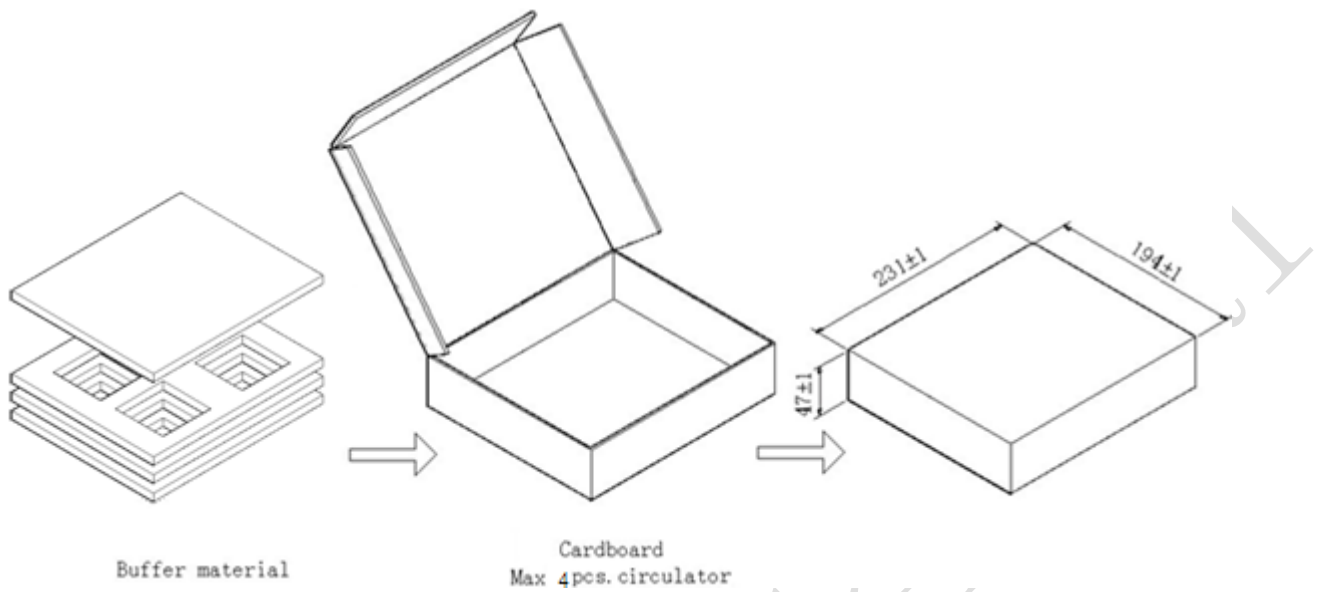

DAPU Confide