




## DP0341S

2110MHz to 2170MHz Single-Junction Surface Mount Isolator

REV.	DESCRIPTION	REVISOR	DATE	APPROVED
A	Creating datasheet	ZC.Wu	2020/10/15	Nick
B	The Pin size changed from 1.2 to 1.3	ZC.Wu	2021/8/23	Nick




### Applications:

- Wireless Infrastructure
- Power Amplifier

### Features:

- Operating frequency range: 2110MHz to 2170MHz
- Operating temperature range: -40°C to +125°C
- Storage temperature range: -40°C to +150°C
- Small surface-mount package delivered on T&R
- BeOfree&RoHS compliant

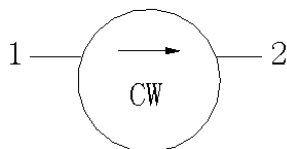

Block Diagram



### Electrical Specifications:


ITEM	SPECIFICATION	
Frequency	2110~2170	MHz
Direction	CW	
Impedance	Typ: 50	$\Omega$
Insertion Loss (Max.)	0.17@25±10℃ 0.20@-40~+125℃	dB
Isolation (Min.)	26	dB
Return Loss (Min.)	25	dB
3rd IMD (Max.)	-78@2*100W CW,Spacing 1MHz(25±10℃ ) -75@2*100W CW,Spacing 1MHz (-40~+125℃ )	dBc
Extend frequency	1960~2320	MHz
Group delay	2.0	ns
Ripple of group delay in extend frequency	2.0	ns
Isolation of extend frequency	13	
2nd harmonic suppression	20	dBc
3rd harmonic suppression	10	dBc
Power FWD/REV/PEAK	200/150 (housing temperature 210 °C,time 10 minutes) /1600	W
Termination/Attenuator	150/-	W/dB
Input Impedance ,real	+45.5~+53.5	$\Omega$
Input Impedance ,imaginary	-4.5j~+4.5j	$\Omega$
Output Impedance ,real	+45.5~+53.5	$\Omega$
Output Impedance ,imaginary	-4.5j~+4.5j	$\Omega$
Resonance point of out-off-band	1910MHz~2370 MHz	

Notes:

1. Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.
2. Performance is guaranteed under the conditions listed in this table and over the operating temperature range.
3. Performance will not degrade by > 10% (Insertion loss > 20%) with an operating temperature of up to 130 °C.



**Mechanical Specifications:**

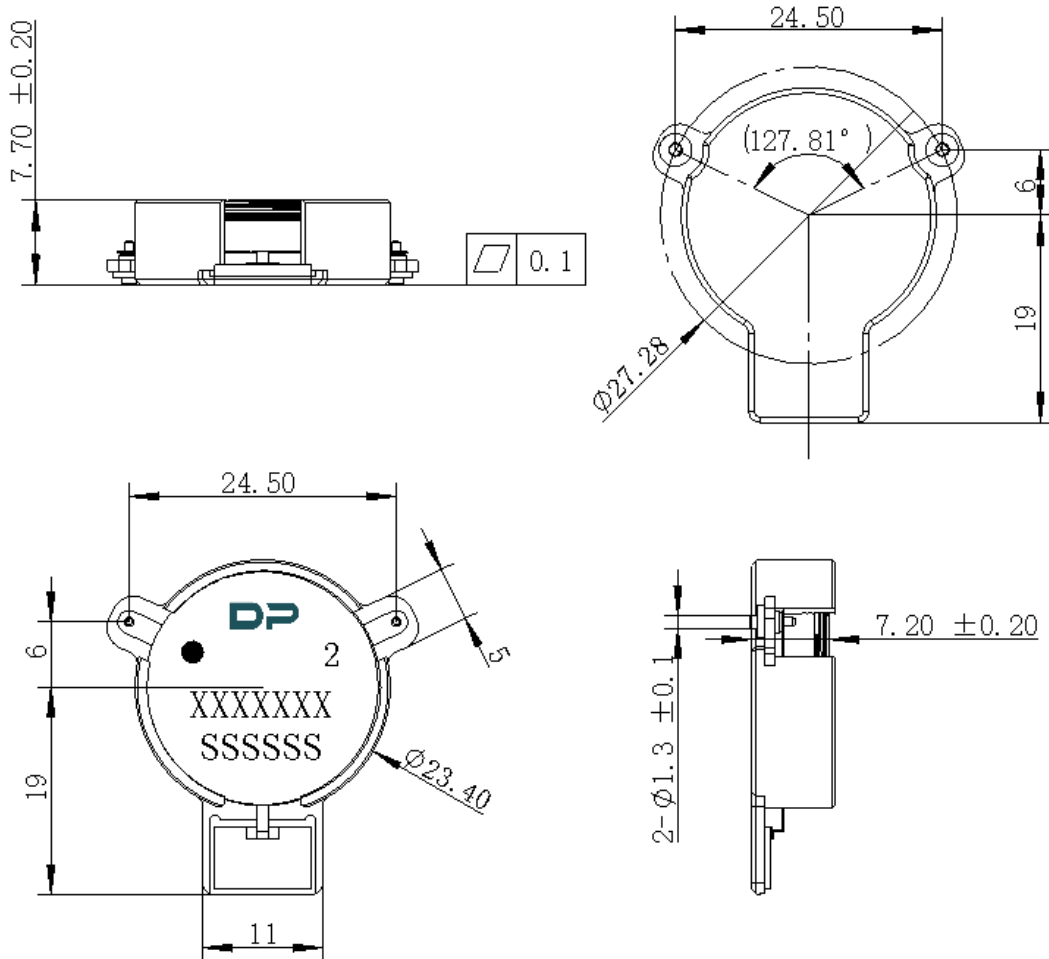

Unit: Millimeters

Notes:

1. The housing and pins are silver-plated.
2. Tolerance  $\pm 0.2$ mm unless otherwise specified.
3. Co-planarity Specification: 0.1mm maximum.
4. Part Number, Lot Code, and Port Designation are printed on the top side of device.
5. The **XXXXXXX** on the label represents the part number
6. The **SSSSSS** on the label represents the serial number
7. The black dot on the label represents the input port