

Travelling Merchant: \_\_\_\_\_

# DATASHEET

Standard: O23B-K146-10.00MHz-A

P/N: \_\_\_\_\_

| Plot             |         |          | The Label              |
|------------------|---------|----------|------------------------|
| Drew             | Audited | Approved | Stamp, please! Thanks! |
|                  |         |          |                        |
| Date: 2014.07.07 |         |          |                        |

## Guangdong Dapu Telecom Technology Co.,Ltd

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098





## 1. Electrical Parameters



| MODEL: O23B-K146-10.00MHz-A |   |            |       |       |                  |  |
|-----------------------------|---|------------|-------|-------|------------------|--|
| Item                        | Description   | Parameters |       |       | Unit             | Test Condition   |
|                             |   | Min.       | Typ.  | Max.  |                  |  |
| Output                      | Frequency   | 10.00      |       |       | MHz              |  |
|                             | Output Waveform   | LVTTTL     |       |       |                  |  |
|                             | Output Low Voltage  |            |       | 0.4   | V                | $V_{cc}=12.0V, O_{load}=15pF$  |
|                             | Output High Voltage                                       | 2.4        |       |       | V                | $V_{cc}=12.0V, O_{load}=15pF$  |
|                             | Duty Cycle  | 45         | 50    | 55    | %                | @50%   |
|                             | Rise / Fall Time<br>(10%~90%)                             |            |       | 6     | ns               |  |
|                             | Spurious Suppression                                      |            |       | -60   | dBc              |  |
|                             | Load  | 15         |       |       | pF               |  |
| Frequency<br>Stabilities    | Frequency Tolerance<br>vs. Operating<br>Temperature Range | -3         |       | +3    | $\times 10^{-9}$ | $T_A$ varied from $-30^{\circ}C$ to $70^{\circ}C$ , after 48 hour<br>ref. to $25^{\circ}C$   |
|                             | Initial Frequency<br>Tolerance                            | -0.1       |       | +0.1  | $\times 10^{-6}$ | Measurement referenced to frequency<br>observed with $T_A=25^{\circ}C, V_{cc}=12.0V, V_c=2.5V$ ,<br>and after 30 minutes of operation, within 30<br>days after ex-works. |
|                             | Frequency Tolerance<br>vs. Supply Voltage                 | -1         |       | +1    | $\times 10^{-9}$ | measurement referenced to frequency<br>observed $T_A=25^{\circ}C, V_{cc}$ varied from 11.4V to<br>12.6V, $V_c=2.5V$ and $O_{Load}=15pF$ .                                |
|                             | Frequency Tolerance<br>vs. Load                           | -1         |       | +1    | $\times 10^{-9}$ | 5% load change measurement referenced to<br>frequency observed with $T_A=25^{\circ}C,$<br>$V_{cc}=12.0V, V_c=2.5V$ , and $O_{Load}=15pF$ .                               |
|                             | Short-Term Stability:<br>Allan Variance                   |            | 0.015 |       | $\times 10^{-9}$ | Temperature stability, no EMI\EMC or other<br>interference, test after power for 1hour ref. to<br>$25^{\circ}C; 1s$ .  |
|                             | Aging Tolerance<br>Per Day                                | -0.5       |       | +0.5  | $\times 10^{-9}$ | $V_{cc}, V_c, T_A$ constant measurement referenced<br>to frequency observed with $T_A=25^{\circ}C, V_{cc}=$  |
|                             | Aging Tolerance<br>1 Year                                 | -0.03      |       | +0.03 | $\times 10^{-6}$ | 12.0V, $V_c=2.5V$ , and after 30 days of<br>operation.   |




|                                 |  |   |      |      |                  |   |
|---------------------------------|--|---|------|------|------------------|---|
| Power Supply                    | Supply Voltage   | 11.4  | 12.0 | 12.6 | V                |   |
|                                 | Steady Consumption   |   |      | 200  | mA               | @25°C   |
|                                 | Warm up current  |   |      | 600  | mA               |   |
| Voltage Control Characteristics | Frequency Tuning Range   | -0.7  |      | -0.5 | $\times 10^{-6}$ | $V_c=0V$ . measurement referenced to $V_c=2.5V$         |
|                                 |  | -0.1  |      | +0.1 | $\times 10^{-6}$ | $V_c=2.5V$ . measurement referenced to exactly 10.00MHz |
|                                 |  | +0.5  |      | +0.7 | $\times 10^{-6}$ | $V_c=5.0V$ . measurement referenced to $V_c=2.5V$       |
|                                 | Linearity  |   |      | 10   | %                |   |
|                                 | Slope  | Positive  |      |      |                  |   |
|                                 | Input Impedance  | 100   |      |      | K $\Omega$       |   |
| Phase Noise                     | Phase Noise @25°C  |   | -115 |      | dBc/Hz           | 10Hz  |
|                                 |  |   | -135 |      |                  | 100Hz   |
|                                 |  |   | -148 |      |                  | 1KHz  |
|                                 |  |   | -152 |      |                  | 10KHz   |
|                                 |  |   | -155 |      |                  | 100KHz  |
| Environmental Conditions        | Operable Temperature   | -30   |      | +70  | °C               |   |
|                                 | Storage Temperature  | -45   |      | +85  | °C               |   |
|                                 | ESD Level  | Human Body Model, class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010.  |      |      |                  |   |
|                                 |  | Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010.  |      |      |                  |   |
|                                 | Moisture Sensitivity Level   | Not humidity sensitive.   |      |      |                  |   |
|                                 | Vibration  | Test Condition: 0.75mm ;acceleration:10g;10Hz~500Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X , Y , Z), IEC 68-2-06 Test Fc. |      |      |                  |   |
| Shock                           | 50g; 11ms; half sine wave (3 times for each 3 directions X, Y, Z), IEC 68-2-27 Test Ea/Severity 50A. |   |      |      |                  |   |



## 2. Mechanical Structure (mm)

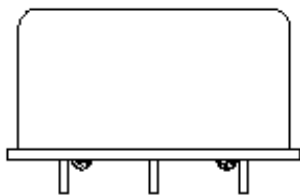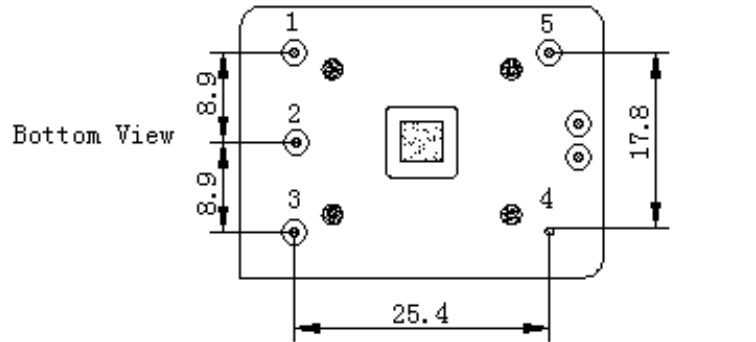


Right View

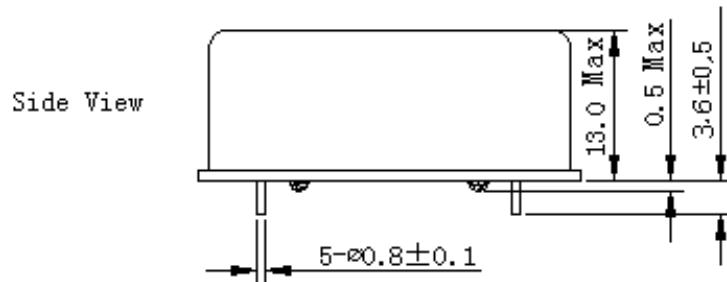

Side View

### PIN FUNCTION

| PIN | FUNCTION |
|-----|----------|
| 1   | VCC      |
| 2   | NC       |
| 3   | VC       |
| 4   | GND      |
| 5   | OUTPUT   |

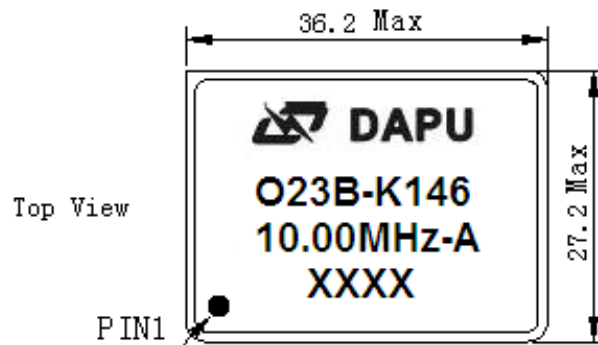

Top View

**Note1:** Tolerance  $\pm 0.2$ mm without mark


**Note2:** The first two xx representative: week  
After two xx representative: year

**Note3:** Referential Weight 21.0g


**Note4:** NC is not connect



### 3. Test Circuit

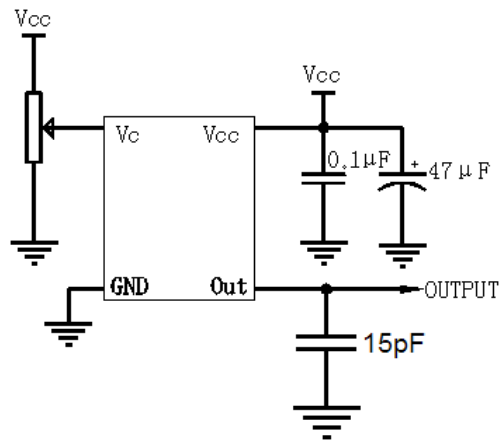


### 4. Initial accuracy at IQC after frequency recovery

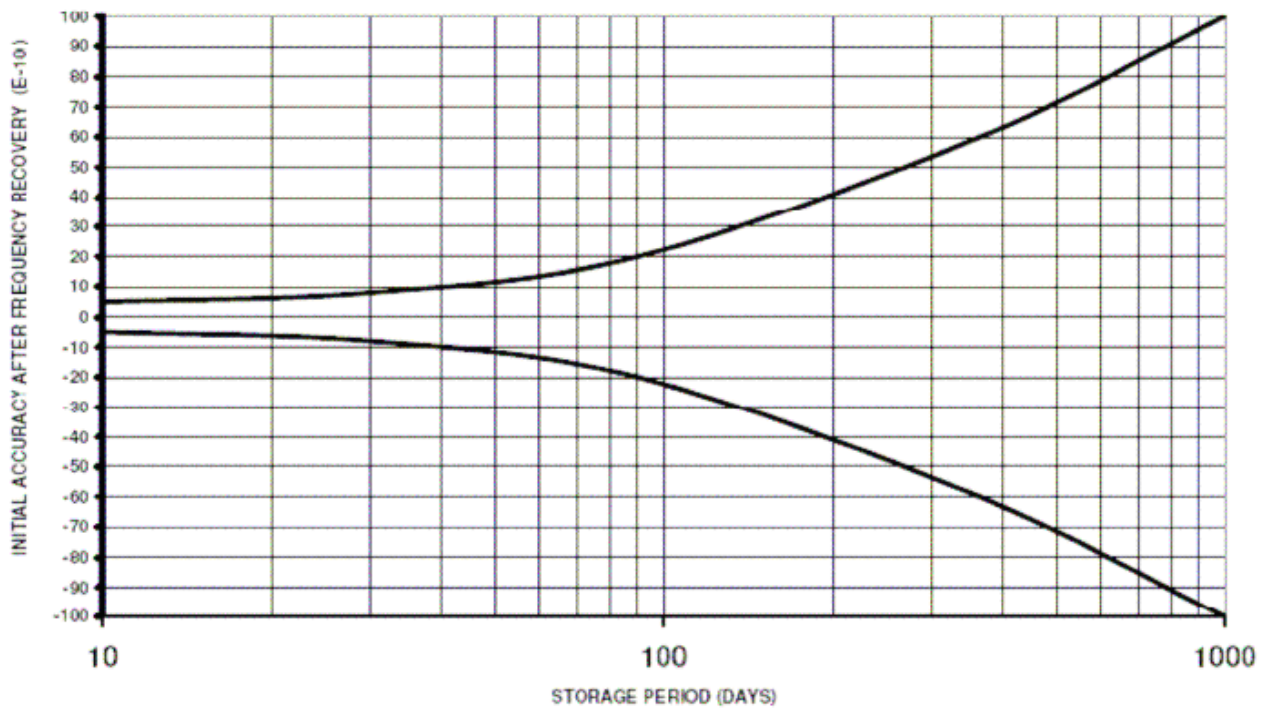

**Note :** Initial accuracy with time of storage and retrace measured at 25 °C after frequency recovery time



### 5. Wave Soldering Curve (RoHS)

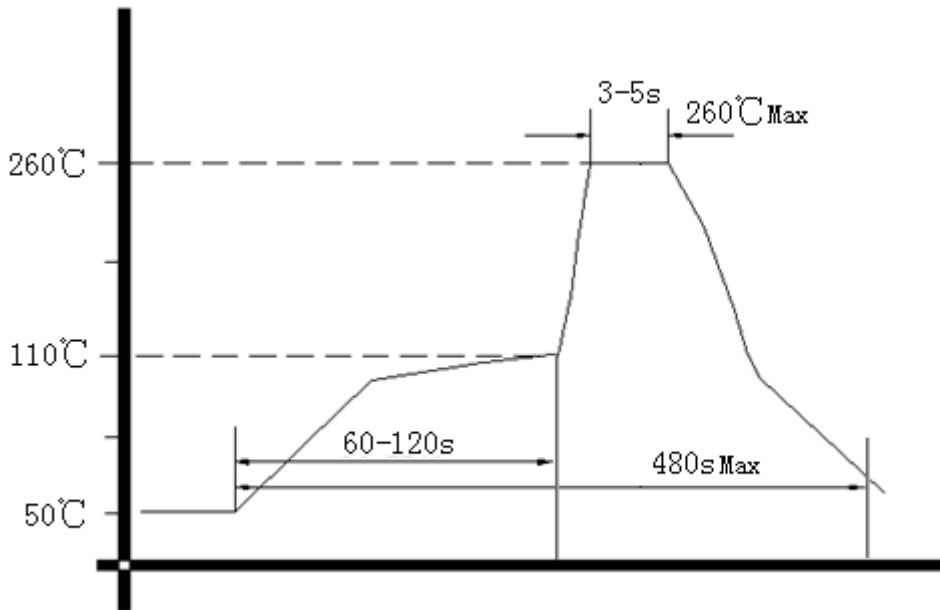

### 6. Package: PVC Tube, 5pcs (mm)

