

Travelling Merchant: \_\_\_\_\_

# DATASHEET

Standard:           **M75B-P313-20.00MHz**          

P/N: \_\_\_\_\_

| Plot             |         |          | The Label              |
|------------------|---------|----------|------------------------|
| Drew             | Audited | Approved | Stamp, please! Thanks! |
|                  |         |          |                        |
| Date: 2014.09.16 |         |          |                        |

## Guangdong Dapu Telecom Technology Co.,Ltd

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888    FAX: 0086-0769-81800098





## 1. Electrical Parameters


| MODEL: M75B-P313-20.00MHz |  |            |      |       |                  |  |
|---------------------------|--|------------|------|-------|------------------|--|
| Item                      | Description  | Parameters |      |       | Unit             | Test Condition   |
|                           |  | Min.       | Typ. | Max.  |                  |  |
| Output                    | Frequency  | 20.00      |      |       | MHz              |  |
|                           | Output Waveform  | HCMOS      |      |       |                  |  |
|                           | Output Low Voltage   |            |      | 0.4   | V                | $V_{cc}=3.3V, O_{load}=15\text{ pF}$   |
|                           | Output High Voltage  | 2.4        |      |       | V                | $V_{cc}=3.3V, O_{load}=15\text{ pF}$   |
|                           | Duty Cycle   | 45         | 50   | 55    | %                | @50%   |
|                           | Rise / Fall Time<br>(10%~90%)                                |            |      | 8     | ns               | @25°C  |
|                           | Load   | 15         |      |       | pF               |  |
| Frequency<br>Stabilities  | Frequency<br>Tolerance vs.<br>Operating<br>Temperature Range | -0.14      |      | +0.14 | $\times 10^{-6}$ | $T_A$ varied from -40°C to 85°C, measurement referenced to frequency observed with $T_A = 25^\circ\text{C}$ , $V_{cc}=3.3V, V_c=1.65V, O_{load}=15\text{ pF}$ , temperature variable speed less than 2°C per minute. |
|                           | Initial Frequency<br>Tolerance                               | -0.5       |      | +0.5  | $\times 10^{-6}$ | Measurement referenced to frequency observed with $T_A = 25^\circ\text{C}$ , $V_{cc}=3.3V, V_c=1.65V$ within 30 days after ex-works.   |
|                           | Frequency Tolerance<br>vs. Supply Voltage                    | -0.1       |      | +0.1  | $\times 10^{-6}$ | measurement referenced to frequency observed $T_A=25^\circ\text{C}$ , $V_{cc}$ varied from 3.13V to 3.47V, $V_c=1.65V$ and $O_{Load}=15\text{ pF}$ .   |
|                           | Frequency Tolerance<br>vs. Load                              | -0.1       |      | +0.1  | $\times 10^{-6}$ | 5% load change measurement referenced to frequency observed with $T_A=25^\circ\text{C}$ , $V_{cc}=3.3V, V_c=1.65V, O_{Load}=15\text{ pF}$  |
|                           | Aging Tolerance<br>Per Day                                   | -0.02      |      | +0.02 | $\times 10^{-6}$ | $T_A=25^\circ\text{C}$ , $V_{cc}=3.3V, V_c=1.65V$ and after 1h of operation.   |
|                           | Aging Tolerance<br>1 Year                                    | -1         |      | +1    | $\times 10^{-6}$ |  |
| Power<br>Supply           | Current<br>Consumption                                       |            |      | 10    | mA               | @25°C, $V_{cc}=3.3V, V_c=1.65V, O_{load}=15\text{ pF}$ .   |
|                           | Supply Voltage   | 3.13       | 3.3  | 3.47  | V                |  |



|                                 |  |  |      |      |                  |  |
|---------------------------------|--|--|------|------|------------------|--|
| Voltage Control Characteristics | Frequency Tuning Range   | -15  |      | -10  | $\times 10^{-6}$ | $V_c=0V$ . measurement referenced to $V_c=1.65V$         |
|                                 |  | -0.5   |      | +0.5 | $\times 10^{-6}$ | $V_c=1.65V$ . measurement referenced to exactly 20.00MHz |
|                                 |  | -10  |      | -15  | $\times 10^{-6}$ | $V_c=3.3V$ . measurement referenced to $V_c=1.65V$       |
|                                 | Linearity  |  |      | 10   | %                |  |
|                                 | Slope  | Positive   |      |      |                  |  |
|                                 | Input Impedance  | 100  |      |      |                  | K $\Omega$   |
| Phase Noise                     | Phase Noise @25°C  |  | -85  | -80  | dBc/Hz           | 10Hz   |
|                                 |  |  | -115 | -110 |                  | 100Hz  |
|                                 |  |  | -135 | -130 |                  | 1KHz   |
|                                 |  |  | -145 | -140 |                  | 10KHz  |
|                                 |  |  | -145 | -140 |                  | 100KHz   |
|                                 |  |  | -148 | -143 |                  | 1MHz   |
| Environmental Conditions        | Operable Temperature   | -40  |      | +85  | °C               |  |
|                                 | Storage Temperature  | -55  |      | +105 | °C               |  |
|                                 | ESD Level  | Human Body Model,class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010.  |      |      |                  |  |
|                                 |  | Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010.   |      |      |                  |  |
|                                 | Moisture Sensitivity Level   | Level 2.   |      |      |                  |  |
|                                 | Vibration  | Test Condition: 0.75mm ;acceleration:10g;10Hz~2000Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X , Y , Z) .IEC 68-2-06 Test Fc. |      |      |                  |  |
| Shock                           | 100g; 6ms; half sine wave (3 times for each 3 directions X , Y , Z ),IEC 68-2-27 Test Ea/Severity 50A. |  |      |      |                  |  |




## 2. Mechanical Structure(mm)

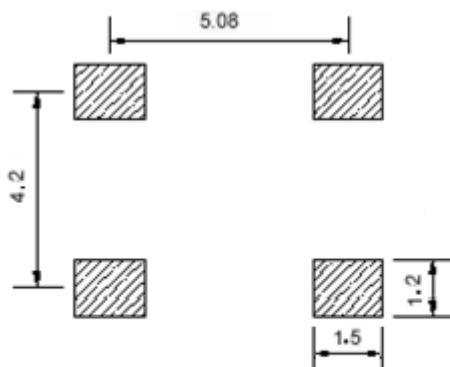

Solder pad layout




Right view

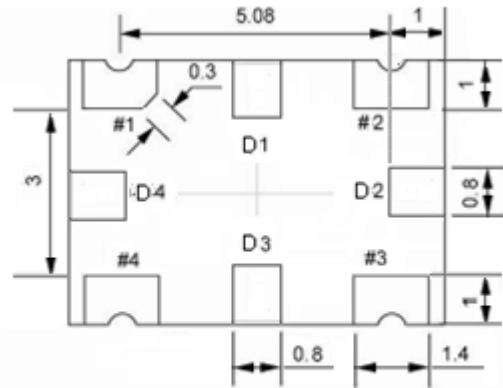

Bottom view



Side view

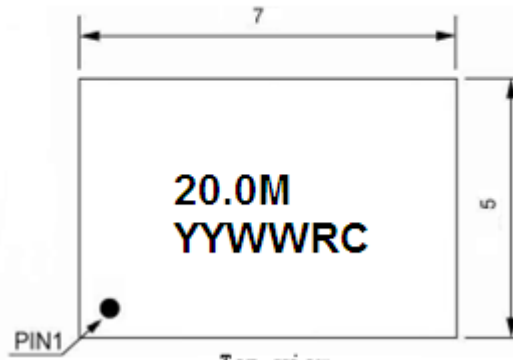

Top view

### PIN FUNCTION

| PIN            | NOTATION | FUNCTION        |
|----------------|----------|-----------------|
| D1, D2, D3, D4 | NC       | Not Connect     |
| 1              | VC       | Control Voltage |
| 2              | GND      | GND             |
| 3              | OUTPUT   | RF Output       |
| 4              | VCC      | Supply Voltage  |

**Note1:** Tolerance  $\pm 0.2\text{mm}$  without mark


**Note2:** The YY representative: year

The WW representative: week

**Note3:** Referential Weight 0.2g

**Note4:** NC is not connect

## 3. Test circuit

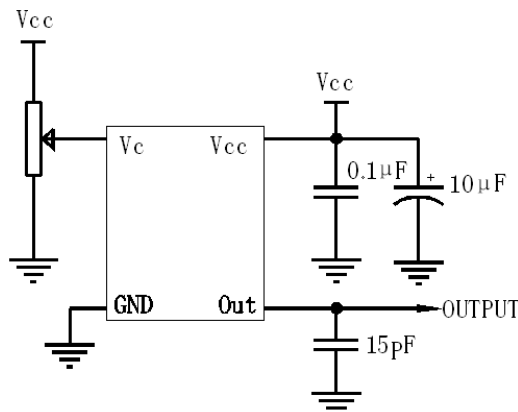



#### 4. Reflow Soldering Curve (RoHS)



#### 5. Package: Tape & Reel (mm)

