


Travelling Merchant: _____

DATASHEET

Standard: T75A-GCAN-12.80MHz

Plot			The Label
Drawing	Auditing	Approve	 2011/7/14 Stamp, please! Thanks!
Date:			

Dongguan Dapu Telecom Technology Co.,Ltd

No.1 New City Street, Songshan Lake Science Park, Dongguan City, Guangdong province, PRC CHINA

TEL: 0086-0769-88010888

FAX: 0086-0769-8800098



The parameter of product

MODEL: T75A-GCAN-12.80MHz

1. Output

1.1. Nominal Frequency	12.80MHz
1.2. Waveform	HCMOS
	$V_{oh} \geq 0.9V_s$, $V_{ol} \leq 0.1 V_s$
1.3. Duty cycle	45%~55% @ 50%
1.4. Rise / Fall time(10%~90%)	$\leq 9ns$
1.5. Load	15pF max

2. Frequency Stabilities

2.1. Stability vs. operating temp. rang	$\leq \pm 2.8 \times 10^{-7}$ @0°C ~ +60°C ref. to 25 °C
2.2. Frequency Stabilities	$\leq \pm 5.0 \times 10^{-7}$ @Temperature,0 to 60°C,inclusive of Ageing,24 hours
2.3. Calibration	$\leq \pm 4.6 \times 10^{-6}$ @ 25°C, Temperature 0°C to 60°C, Load 15pF $\pm 5\%$, Ageing 20 years

3. Supply Voltage

3.1. Supply Voltage	+3.3VDC (unalterable)
---------------------	-----------------------

4. Current

4.1. Input Current	4mA(Typical)
--------------------	--------------

5. Phase Noise


5.1. 1KHz	-127dBc/Hz
-----------	------------

6. Environmental conditions

6.1. Operable temperature range	0°C to +60°C
6.2. Storage temperature range	-55°C to +125°C
6.3. Vibration	Test Condition: 1.52mm (amplitude, 5~26Hz), 19.6m/s (26~500Hz), 20 min per1 cycle, test 2 hour. (3 times for each 3 planes)
6.4. Shock	980m/s ² , 6msec wave, 3 times for each 3 planes
6.5. Drop	Test Condition: 1 drop on hard wood from 75cm height in each 3 planes
6.6. Save	Recommend keep it on 30°C, 70%RH (humidity)



7. Mechanical

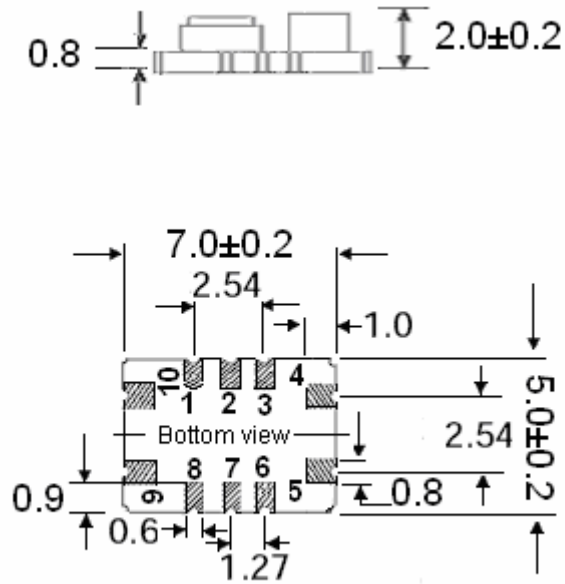

Pad Connections

- 1 N/C
- 2.N/C
- 3.N/C
- 4.GND
- 5.Output
- 6.N/C
- 7.N/C
- 8.Tristate
- 9. +Vdd
- 10. N/C

Unit : mm