

客户宝号: _____

规格书

品名规格: T11A-MCAN-65.537MHz

出 图			承 认 印
制 图	审 核	核 准	
日期: 年 月 日			

请于承认签章 谢谢!

东莞市大普通信技术有限公司

东莞市松山湖科技园新城大道1号

TEL: 0086-0769-81867888 FAX: 0086-0769-81800098



产品技术参数指标

型号: T11A-MCAN-65.537MHz

1. 输出

- 1.1. 频率 65.537MHz
- 1.2. 波形 HCMOS
高电平>2.8V, 低电平<0.3V
- 1.3. 占空比 45%~55%
- 1.4. 上升沿/下降沿 < 5ns

2. 频率稳定度

- 2.1. 温度特性 $\leq \pm 3.0 \times 10^{-6}$ @-40°C ~ +80°C @25°C
- 2.2. 老化率 $\leq \pm 2.0 \times 10^{-8}$ /日
 $\leq \pm 1.0 \times 10^{-6}$ /第一年

3. 工作电压

- 3.1. 工作电压 +3.3V \pm 5%

4. 电流

- 4.1. 工作电流 20mA(Typical)


5. 环境特性

- 5.1. 工作温度 -40°C ~ +80°C
- 5.2. 存储温度 -45°C ~ +90°C
- 5.3. 振动 测试条件: 振幅1.52mm (5~26Hz), 19.6m/s²(26~500Hz),
20分钟一个循环, 测试2小时 (3个方向, X,Y,Z)
- 5.4. 冲击 980m/s², 6msec, 半正弦波, 3个方向, 每个方向3次
- 5.5. 下坠 从75cm高度下坠到硬木板上
- 5.6. 保存 从包装盒取出之后, 建议保存条件为: 温度30°C,
湿度70%



6. 机械结构:


6.1. 外形尺寸及管脚定义

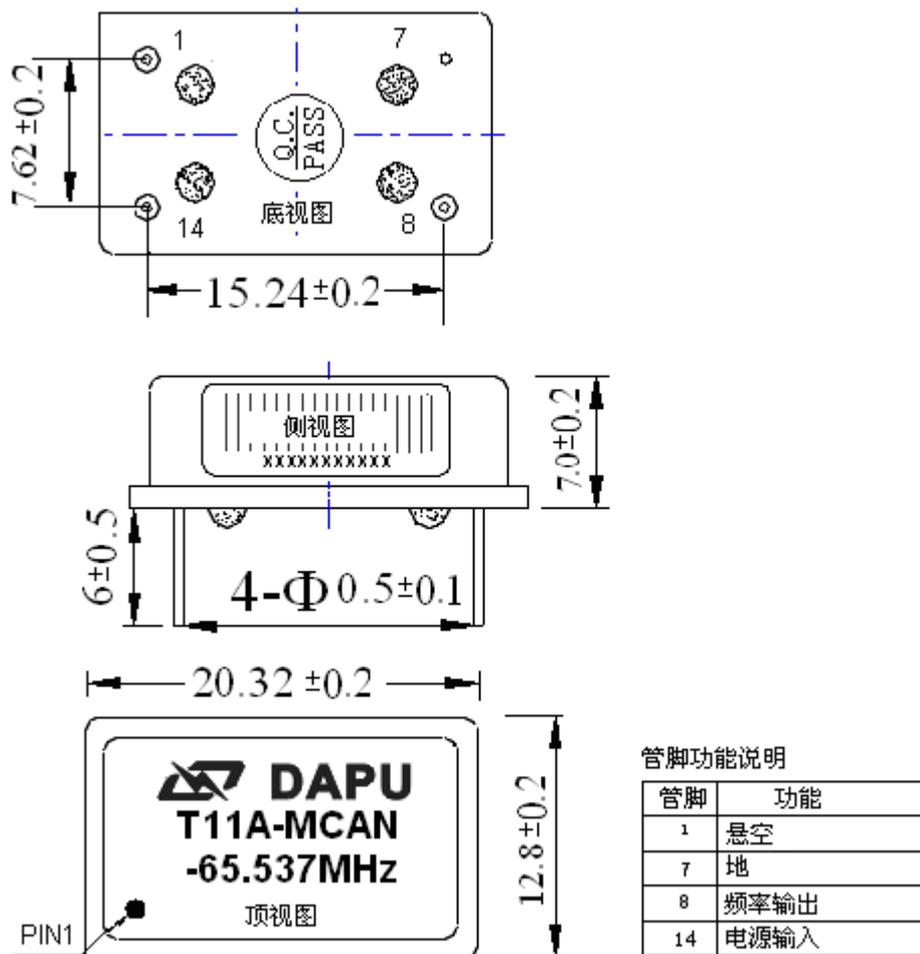

注:底视图为焊盘正对着观察者

单位: mm


7. 电路图

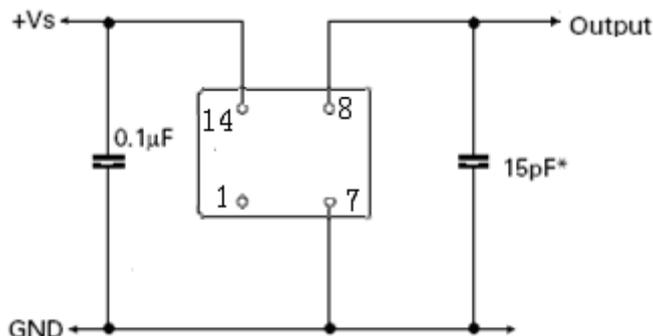



8. 波峰焊曲线图

Solderprofile:

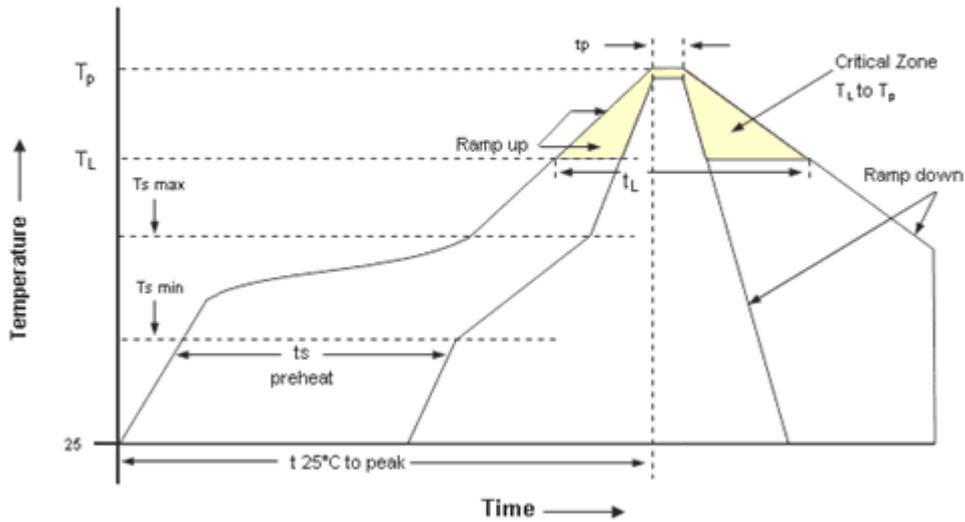

Profile Feature	Pb-Free Assembly	Profile Feature	Pb-Free Assembly
Average ramp-up rate (T _L to T _p)	3°C/second max.	Time 25°C to Peak Temperature	8 minutes max.
Preheat - Temperature Min (T _{s_min}) - Temperature Min (T _{s_max}) - Time (min to max) (t _s)	150°C 200°C 60-180 seconds	Time maintained above - Temperature (T _L) - Time (t _L)	217°C 60-150 seconds
T _{s_max} to T _L - Ramp-up Rate	3°C/second max.		
Time maintained above - Temperature (T _L) - Time (t _L)	217°C 60-150 seconds	Time within 5°C of actual Peak Temperature (t _p)	20-40 seconds
Peak Temperature (T _p)	max 260°C	Ramp-down Rate	6°C/second max.

Note: All temperatures refer to topside of the package, measured on the package body surface.