

Travelling Merchant: _____

DATASHEET

Standard: **O77A-M329-10.00MHZ**

P/N: _____

| Plot | | | The Label |
|------------------|------------------|------------------|-----------|
| Drew | Audited | Approved | |
| <i>Anway.wei</i> | <i>Tony Wang</i> | <i>James.Liu</i> | |
| Date: 2014.01.15 | | | |

Stamp, please! Thanks!

Guangdong Dapu Telecom Technology Co.,Ltd

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



Table of amendment

| Version | Revision contents | Prepared by | Revised date |
|---------|---|--------------|--------------|
| 1.0 | The first issued | <i>Amway</i> | 2012.09.20 |
| 1.1 | “Frequency Tuning Range” changed | <i>Amway</i> | 2012.09.28 |
| 1.2 | “EEPROM” added | <i>Amway</i> | 2013.06.08 |
| 1.3 | “phase noise” changed | <i>Amway</i> | 2013.06.08 |
| 1.5 | “LABEL OR MARKING” added “Output Waveform” and “Short-Term Stability: Allan Variance” and “Current Consumption” and “8K I2C SERIAL EEPROM” changed | <i>Amway</i> | 2013.06.21 |
| 1.6 | “Inventory record in EEPROM- Comcode” changed | <i>Amway</i> | 2013.08.09 |
| 1.7 | “Frequency Tolerance vs. Operating Temperature Range- Test Condition” changed | <i>Amway</i> | 2013.08.30 |
| 1.8 | “Frequency Tolerance vs. Operating Temperature Range- Test Condition”、 “Warm-up completion time- Test Condition”、 “Environmental Conditions” 、 “Mechanical Structure”、 “I2C Devices Address” 、 “Inventory record in EEPROM” change “Random Vibration” add | <i>Amway</i> | 2013.12.09 |
| 1.9 | “Mechanical Structure -LABEL” change | <i>Amway</i> | 2014.01.15 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



1. Electrical Parameters

| MODEL: O77A-M329-10.00MHz | | | | | | |
|---------------------------|---|------------|------|--------|------------------|--|
| Item | Description | Parameters | | | Unit | Test Condition |
| | | Min. | Typ. | Max. | | |
| Output | Frequency | 10.00 | | | MHz | |
| | Output Waveform | LVTTTL | | | | |
| | Output Low Voltage | | | 0.8 | V | $V_{cc}=5.0V, O_{load}=15pF$ |
| | Output High Voltage | 2.4 | | | V | $V_{cc}=5.0V, O_{load}=15pF$ |
| | Duty Cycle | 45 | 50 | 55 | % | @50% |
| | Rise / Fall Time (10%~90%) | | 2 | 3 | ns | @25°C |
| | Load | 15 | | | pF | |
| | 5MHz sub-harmonic peak | | | -37 | dBc | |
| | Start up time | | | 2 | s | |
| Frequency Stabilities | Frequency Tolerance vs. Operating Temperature Range | | | 0.2 | $\times 10^{-9}$ | T_A varied from -10°C to 85°C, $f-T=(f_{max}-f_{min})/2f_0, V_{cc}=5.0V, O_{load}=15pF,$ temperature variable speed less than 2°C per minute. |
| | | -0.12 | | +0.12 | $\times 10^{-9}$ | $\Delta T^\circ C < 15^\circ C$ within range -10°C to 1°C $V_{cc}=5.0V, O_{load}=15pF,$ temperature variable speed less than 1°C per minute, DAC range from 0x0400 to 0xFC00. |
| | | -0.06 | | +0.06 | $\times 10^{-9}$ | $\Delta T^\circ C < 15^\circ C$ within range 1°C to 70°C $V_{cc}=5.0V, O_{load}=15pF,$ temperature variable speed less than 1°C per minute, DAC range from 0x0400 to 0xFC00. |
| | | -0.08 | | +0.08 | $\times 10^{-9}$ | $\Delta T^\circ C < 15^\circ C$ within range 70°C to 85°C $V_{cc}=5.0V, O_{load}=15pF,$ temperature variable speed less than 1°C per minute, DAC range from 0x0400 to 0xFC00. |
| | Warm-up stability | -0.015 | | +0.015 | $\times 10^{-6}$ | $T_A=25^\circ C,$ within 30 days power off, After 12 minutes of warm-up with reference to 24 hours value 文本 |
| | Flywheel Time | | | 24 | hours | |
| | Time shift during Flywheel | | | 10 | us | Respect to PRC and $\Delta T_{Amb}=15^\circ C$ within operating range |
| | Frequency variation During Thermal Shock (up to 3 minutes duration) | -2 | | +2 | $\times 10^{-9}$ | Ramp rate : 5C/min up to 3 minutes duration, within entire operating temperature range. |




| | | | | | | | |
|------------------------|--|-------|-------|------------------|--|---|---|
| | Initial Frequency Tolerance | -0.05 | | +0.05 | $\times 10^{-6}$ | Measurement referenced to frequency observed with $T_A=25^\circ\text{C}$, $V_{cc}=5.0\text{V}$, DAC=0x7FFF, and after 12 minutes of operation, within 30 days after ex-works | |
| | Frequency Tolerance vs. Supply Voltage | -0.04 | | +0.04 | $\times 10^{-9}$ | measurement referenced to frequency observed $T_A=25^\circ\text{C}$, V_{cc} varied from 4.75V to 5.25V, and $O_{Load}=15\text{pF}$. | |
| | Frequency Tolerance vs. Load | -0.04 | | +0.04 | $\times 10^{-9}$ | 5% load change measurement referenced to frequency observed with $T_A=25^\circ\text{C}$, $V_{cc}=5.0\text{V}$, and $O_{Load}=15\text{pF}$. | |
| | Short-Term Stability: Allan Variance | | | | 0.025 | $\times 10^{-9}$ | Temperature stability, no EMI/EMC or other interference, test after power for 1 hour ref. to 25°C ; 1s, using PN9000 equipment. |
| | | | | | 0.01 | $\times 10^{-9}$ | Temperature stability, no EMI/EMC or other interference, test after power for 1 hour ref. to 25°C ; 10s, using PN9000 equipment. |
| | | | | | 0.01 | $\times 10^{-9}$ | Temperature stability, no EMI/EMC or other interference, test after power for 1 hour ref. to 25°C ; 100s, using PN9000 equipment. |
| | Aging Tolerance 8 hours | -0.48 | | +0.48 | $\times 10^{-9}$ | V_{cc} , T_A constant measurement referenced to frequency observed with $T_A=25^\circ\text{C}$, $V_{cc}=5.0\text{V}$, and after 16 hours of operation, within 30 days power off | |
| | Aging Tolerance 16 hours | -0.18 | | +0.18 | $\times 10^{-9}$ | V_{cc} , T_A constant measurement referenced to frequency observed with $T_A=25^\circ\text{C}$, $V_{cc}=5.0\text{V}$, and after 60 hours of operation, within 30 days power off | |
| | Aging Tolerance 24 hours | -0.08 | | +0.08 | $\times 10^{-9}$ | V_{cc} , T_A constant measurement referenced to frequency observed with $T_A=25^\circ\text{C}$, $V_{cc}=5.0\text{V}$, and after 7 days of operation, within 30 days power off | |
| Aging Tolerance 1 Year | -0.02 | | +0.02 | $\times 10^{-6}$ | V_{cc} , T_A constant measurement referenced to frequency observed with $T_A=25^\circ\text{C}$, $V_{cc}=5.0\text{V}$, and after 30 days of operation. | | |
| Overall Stability | -0.3 | | +0.3 | $\times 10^{-6}$ | Inclusive of the following: operating temperature -10°C to 85°C $5.0\text{V}\pm 5\%$ 15pF load $\pm 5\%$ 10 years aging reference to nominal frequency | | |
| Power Supply | Supply Voltage | 4.75 | 5.0 | 5.25 | V | | |
| | Current Consumption | | | 600 | mA | @ 25°C | |



| | | | | | | |
|-----------------------------|--|---|------|-------|--------------------|---|
| | Warm-up completion time | | | 12 | min | T _A =25°C, Warm-up completion bit 0 to 1 transition. Using ALU test scheme 1 |
| | Warm up current | | | 1200 | mA | |
| | Ripple noise on power supply | | | 100 | mV | Peak to peak |
| DAC Control Characteristics | Frequency Tuning Range | -0.3 | | | × 10 ⁻⁶ | DAC=0x0400. measurement referenced to DAC=0x7FFF |
| | | -0.05 | | +0.05 | × 10 ⁻⁶ | DAC=0x7FFF. measurement referenced to Exactly 10.00MHz |
| | | | | +0.3 | × 10 ⁻⁶ | DAC=0xFC00. measurement referenced to DAC=0x7FFF |
| | Linearity | | | 10 | % | |
| | Slope | Positive | | | | |
| Phase Noise | Phase Noise | | -100 | -70 | dBc/Hz | 1Hz |
| | | | -128 | -90 | | 10Hz |
| | | | -140 | -110 | | 100Hz |
| | | | -148 | -130 | | 1KHz |
| | | | -152 | -130 | | 10KHz |
| | | | -152 | -130 | | 100KHz |
| | | | -155 | -130 | | 1MHz |
| Environmental Conditions | Operable Temperature | -40 | | +85 | °C | |
| | Storage Temperature | -55 | | +105 | °C | |
| | ESD Level | Human Body Model, class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010. | | | | |
| | | Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010. | | | | |
| | Moisture Sensitivity Level | Not humidity sensitive. | | | | |
| | Vibration | Test Condition: 0.75mm (10Hz~55Hz);acceleration:10g (10Hz~500Hz) , one cycle per 30 min. (3 times for each 3 directions X ,Y , Z), IEC 68-2-06 Test Fc. | | | | |
| | Random Vibration | Test Condition: ASD:0.02g ² /Hz (10Hz~500Hz) , one cycle per 30 min. (3 times for each 3 directions X ,Y , Z), IEC 68-2-64 Test Fd. | | | | |
| Shock | 50g; 11ms; half sine wave (3 times for each 3 directions X ,Y , Z),IEC 68-2-29 Test Eb. | | | | | |




2. Mechanical Structure(mm)

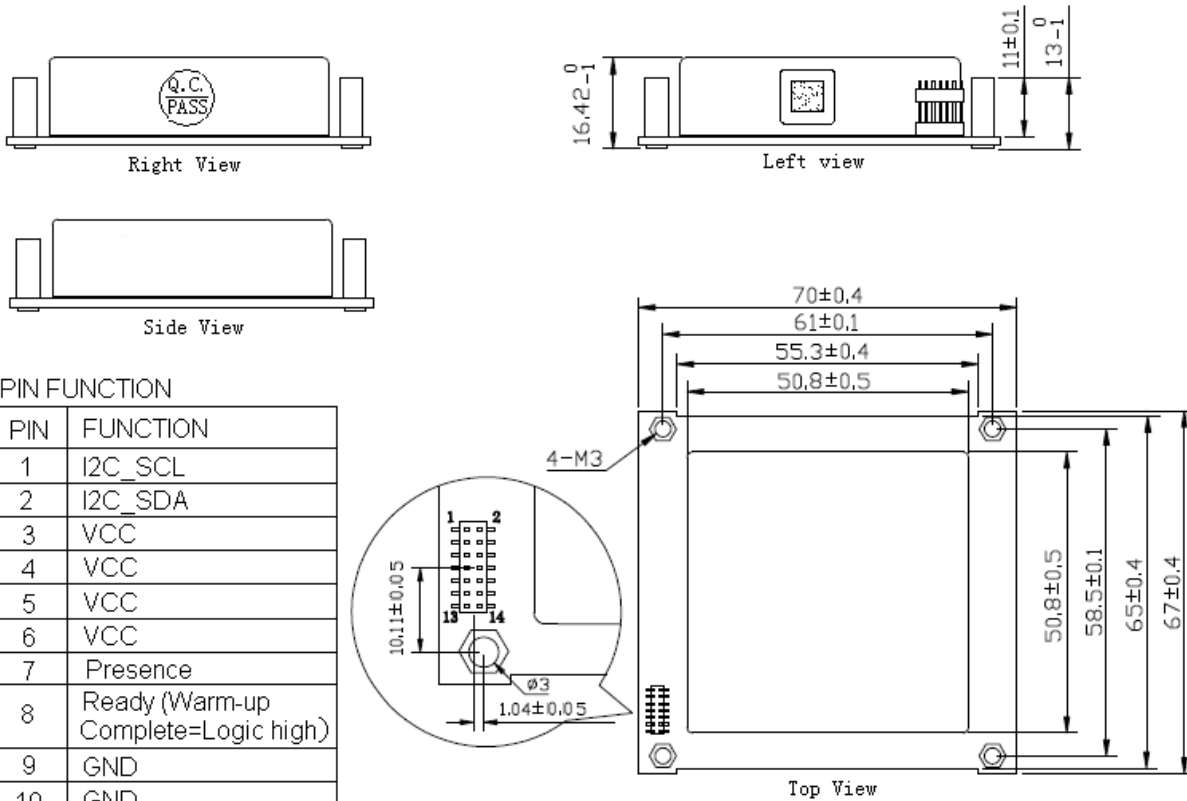

PIN FUNCTION

| PIN | FUNCTION |
|-----|-------------------------------------|
| 1 | I2C_SCL |
| 2 | I2C_SDA |
| 3 | VCC |
| 4 | VCC |
| 5 | VCC |
| 6 | VCC |
| 7 | Presence |
| 8 | Ready (Warm-up Complete=Logic high) |
| 9 | GND |
| 10 | GND |
| 11 | 10MHz output |
| 12 | GND |
| 13 | GND |
| 14 | GND |

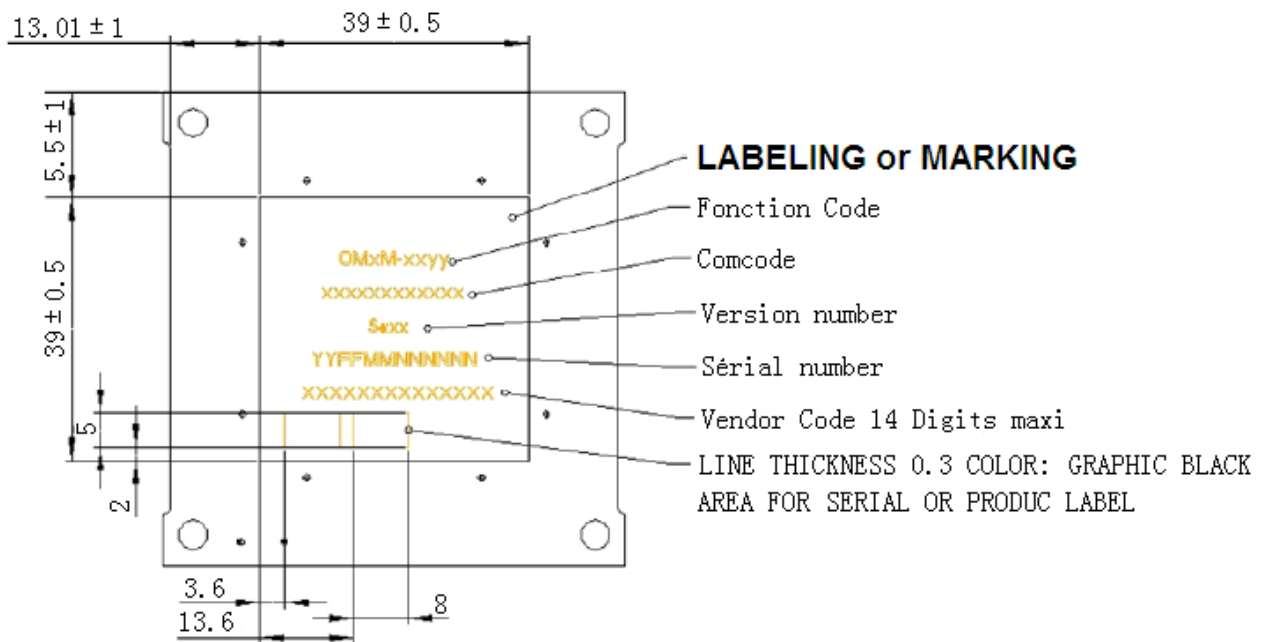

Note: Referential Weight 60g



LABEL OR MARKING NOTES:

- The label marking shall agree with information stored in the OMxM memory at the time of delivery.
- Graphic shown is a visual representation only. Do not use to make an art master.
- Label shall be 0.25mm thick polycarbonate/polyester. Text shall be rear printed black on Lucent Central Office White per OS-11150 background, backed with 3M 468 permanent acrylic adhesive or equivalent. Finish shall be matte over clear. Approved equivalents are allowed.
- Label shall meet UL 969 requirements. Material must be of UL recognized component plastic. Supplier must be UL approved.
- A certification sheet verifying the suppliers UL approval for this material shall be provided by the supplier with each package/container or verification may be part of the adhesive release liner
- All dimensions millimeters Unless otherwise ta listed, all tolerances are ±0.38mm.
- All corners shall have a 1.52mm radius.
- Line 1 shall be 12 point Helvetica Bold Condensed font with text ‘OMQM-08’ for List 1, ‘OMQM-24’ for List 2 and ‘OMAMAT’ for List 3 ,’OMQM-08PB’ for L4 and ‘OMQM-24PB’ for L5
- Line 2 shall be 10 point Helvetica Light Condensed font with a 9 characters per line maximum consisting of the Alcatel-Lucent Supplier’s part number .
- Line 3 shall be 10 point Helvetica Light Condensed font with a 6 characters per line maximum consisting of the Version Number.
- Line 4 shall be 8 point Helvetica Light Condensed font with a 12 characters per line maximum consisting of the supplier Serial Number.
- The supplier’s company name shall be black in color.(DAPU)

3. I²C Devices Address

3.1 I2C Interface and supported devices:

The OM plug-in will support I2C interface (3.3V) up to 100KHz rate support. The following I2C device shall be supported:

- 16-bit DAC (compatible to TI DAC8571 performance and software programmable register map)
 - I2C 7-bit address : 1001100
- EEPROM (compactable to 24C08 EEPROM and software programmable register map)
 - I2C 7-bit address : 1010100
- Temperature sensor for checking internal temperature of OM plug-in
 - I2C 7-bit address : 1001000

Note: I2C 7-bit address : 0101110 already occupied by product, not allowed to be used.

3.2 EEPROM for inventory and data storage

| Address | Total number of bytes | Usage |
|---------------|-----------------------|------------------|
| 0x000 – 0x05F | 96 | Inventory record |



3.2.1 Inventory record in EEPROM

The inventory record inside the EEPROM will be in the following format. This is a 96 byte format.


| Identification Fields | D# | # of bytes | Values (in Hex) |
|--|---------|------------|---|
| Header | D0 | 1 | 80 |
| Function Code: OM-24 for 24 hour flywheel | D1-D11 | 11 | 5 ASCII bytes to show "OM-24" See note 1 for unused position filling |
| Serial Number: "Y ₁ Y ₀ F ₁ F ₀ M ₁ M ₀ N ₅ N ₄ N ₃ N ₂ N ₁ N ₀ " Y ₁ Y ₀ =year,F ₁ F ₀ =factory code, M ₁ M ₀ =month N ₅ N ₄ N ₃ N ₂ N ₁ N ₀ =unit number | D12-D24 | 13 | Variable Note 1, 4 |
| Doc Number | D25-D36 | 12 | 9 ASCII bytes to show "DD/026696" See note 1 for unused position filling |
| Doc Issue No. "I ₁ .I ₀ " (e.g. 1.6) | D37-D41 | 5 | Note 1 |
| Version "SS ₂ :S ₁ S ₀ " (eg. S1:9) | D42-D47 | 6 | Note 1,4 |
| DAPU's Part Number : numbering scheme (12-digit) | D48-D62 | 15 | 12 ASCII bytes to show "O77A-M329-10" |
| Supplier Specific Information (If applicable) | D63-D73 | 11 | Note 1 |
| Specific information per function code | D74-D80 | 7 | Note 1, 3 |
| Supplier Code (Supplier's company name in capital letter) | D81-D94 | 14 | "DAPU" See note 1 for unused position filling |
| End of File | D95 | 1 | 04 |

Notes

1. The I/D values are in ASCII representation except where explicitly noted. Unused positions in a field are filled with the ASCII space character (20h). A null character (00h) is in the last byte of each field, except header and End-of-file. The end-of-file ASCII character (04h) indicates end of inventory data.
2. The variable values will be provided by or agreed to by SCN contact for use here.
3. This field is reserved for future use
4. F1F0 is defined by DAPU to identify different factory of the DAPU to manufacture the part.
SS2:S1S0 is defined by DAPU to differentiate different version of the part.



4. Test Circuit

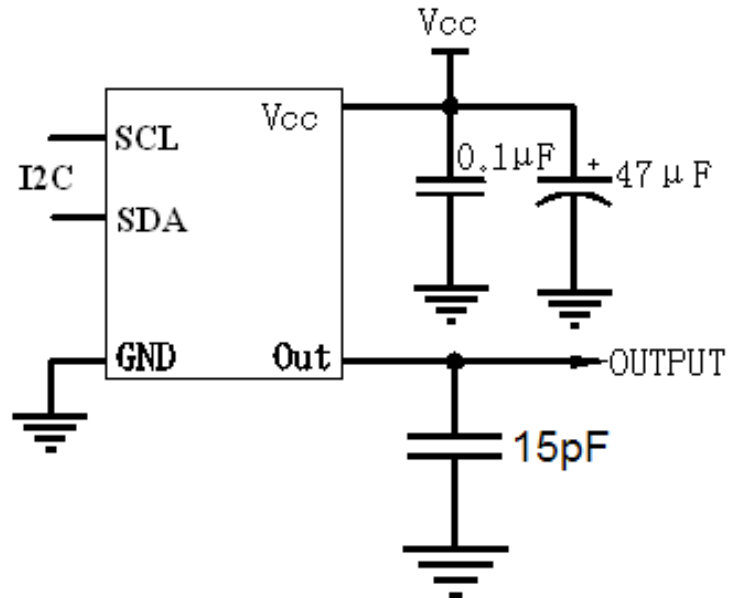

5. Package(mm)

