

Travelling Merchant: _____

DATASHEET

Standard: **O11F-K319-12.80MHz-A**

P/N: _____

| Plot | | | The Label |
|------------------|------------------|------------------|------------------------|
| Drew | Audited | Approved | Stamp, please! Thanks! |
| <i>Amway.wei</i> | <i>Tony Wang</i> | <i>James Lee</i> | |
| Date: 2018.02.01 | | | |

Guangdong Dapu Telecom Technology Co.,Ltd

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



1、Electrical Parameters





| MODEL: O11F-K319-12.80MHz-A | | | | | | | |
|-----------------------------|--|------------|------|-------|------------------|--|---|
| Item | Description | Parameters | | | Unit | Test Condition | |
| | | Min. | Typ. | Max. | | | |
| Output | Frequency | 12.80 | | | MHz | | |
| | Output Waveform | HCMOS | | | | | |
| | Output Low Voltage | | | 0.4 | V | $V_{cc}=3.3V, O_{load}=15pF$ | |
| | Output High Voltage | 2.7 | | | V | $V_{cc}=3.3V, O_{load}=15pF$ | |
| | Duty Cycle | 45 | 50 | 55 | % | @50% | |
| | Rise / Fall Time (10%~90%) | | | 10 | ns | | |
| | Load | 15 | | | pF | | |
| Frequency Stabilities | Frequency Tolerance vs. Operating Temperature Range | -0.01 | | +0.01 | $\times 10^{-6}$ | T_A varied from $-40^{\circ}C$ to $85^{\circ}C$, measurement referenced to frequency observed with $f_{ref} = (f_{max} + f_{min})/2$, $V_{cc}=3.3V, O_{load}=15pF$, temperature variable speed less than $2^{\circ}C$ per minute. | |
| | Initial Frequency Tolerance | -0.5 | | +0.5 | $\times 10^{-6}$ | Measurement referenced to frequency observed with $T_A = 25^{\circ}C, V_{cc}=3.3V$, and after 15 minutes of operation, Within 24 hours after ex-works. | |
| | Frequency Tolerance vs. Supply Voltage | -0.01 | | +0.01 | $\times 10^{-6}$ | measurement referenced to frequency observed $T_A=25^{\circ}C, V_{cc}$ varied from 3.13V to 3.47V, and $O_{Load}=15pF$. | |
| | Frequency Tolerance vs. Load | -0.01 | | +0.01 | $\times 10^{-6}$ | 5% load change measurement referenced to frequency observed with $T_A=25^{\circ}C, V_{cc}=3.3V, O_{Load}=15pF$. | |
| | Short-Term Stability: Allan Variance | | | | 0.3 | $\times 10^{-9}$ | Temperature stability, no EMI/EMC or other interference, test after power for 1hour ref. to $25^{\circ}C$; 10s, using PN9000 equipment. |
| | | | | | 0.05 | $\times 10^{-9}$ | Temperature stability, no EMI/EMC or other interference, test after power for 1hour ref. to $25^{\circ}C$; 100s, using PN9000 equipment. |
| | Aging Tolerance Per Day | -5 | | +5 | $\times 10^{-9}$ | V_{cc}, T_A constant measurement referenced to frequency observed with $T_A=25^{\circ}C, V_{cc}=3.3V$, and after 30 days of operation. | |
| | Aging Tolerance 1 Year | -0.5 | | +0.5 | $\times 10^{-6}$ | | |



| | | | | | | |
|--------------------------|---|---|------|------|------------------|---|
| | Holdover 24hours Drift | -5 | | +5 | $\times 10^{-9}$ | $V_{cc}=3.3V$, temperature change range $\pm 2.8^{\circ}C$, after 30 days of operation. |
| | Overall Stability | -4.6 | | +4.6 | $\times 10^{-6}$ | Inclusive of the following: - operating temperature $-40^{\circ}C$ to $85^{\circ}C$ - $3.3V \pm 5\%$ - 15pF load $\pm 5\%$ - 2 times reflow soldering - 20 years aging reference to nominal frequency |
| Power Supply | Supply Voltage | 3.13 | 3.3 | 3.47 | V | |
| | Steady Consumption | | | 300 | mA | @ $25^{\circ}C$ |
| | Warm-Up Time | | | 5 | minutes | @ $25^{\circ}C$ within $\pm 0.1 \times 10^{-6}$ of final frequency with reference after 1 hour on. |
| | Warm up current | | | 600 | mA | |
| Phase Noise | Phase Noise | | -95 | -90 | dBc/Hz | 10Hz |
| | | | -120 | -115 | | 100Hz |
| | | | -145 | -140 | | 1KHz |
| | | | -150 | -145 | | 10KHz |
| | | | -150 | -145 | | 100KHz |
| Environmental Conditions | Operable Temperature | -40 | | +85 | $^{\circ}C$ | |
| | Storage Temperature | -55 | | +105 | $^{\circ}C$ | |
| | ESD Level | Human Body Model,class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010. | | | | |
| | | Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010. | | | | |
| | Moisture Sensitivity Level | Level 2. | | | | |
| | Vibration | Test Condition: 0.75mm ;acceleration: 10g;10Hz~500Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X ,Y , Z), IEC 68-2-06 Test Fc. | | | | |
| Shock | 50g; 11ms; half sine wave (3 times for each 3 directions X ,Y , Z),IEC 68-2-27 Test Ea/Severity 50A. | | | | | |
| Full Package Storage | Relative humidity (%) | 20%~70% | | | | |
| | Temperature ($^{\circ}C$) | -10~35 $^{\circ}C$ | | | | |




2、 Mechanical Structure(mm)

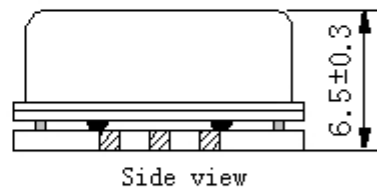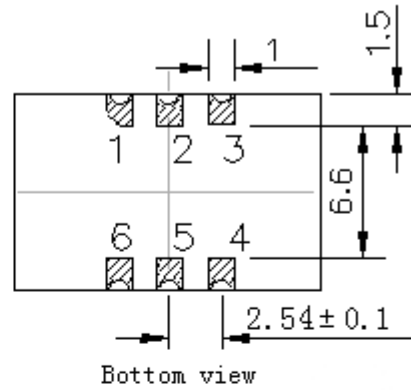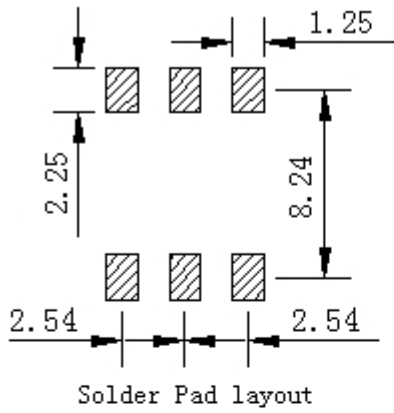

PIN FUNCTION


| PIN | NOTATION | FUNCTION |
|-----|----------|----------------|
| 1 | NC | Not Connect |
| 2,5 | NC | Not Connect |
| 3 | GND | GND |
| 4 | OUTPUT | RF Output |
| 6 | VCC | Supply Voltage |

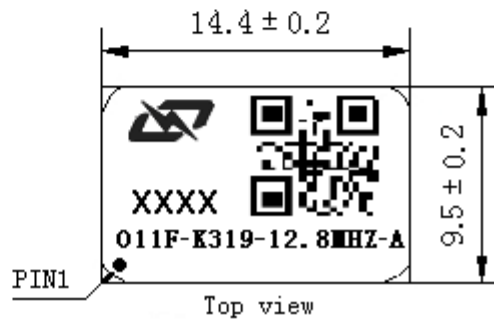


- Note1:** Tolerance $\pm 0.2\text{mm}$ without mark
- Note2:** Referential weight 2.2g
- Note3:** NC is not connect
- Note4:** The first two xx representative: week
After two xx representative: year



3、 Test Circuit

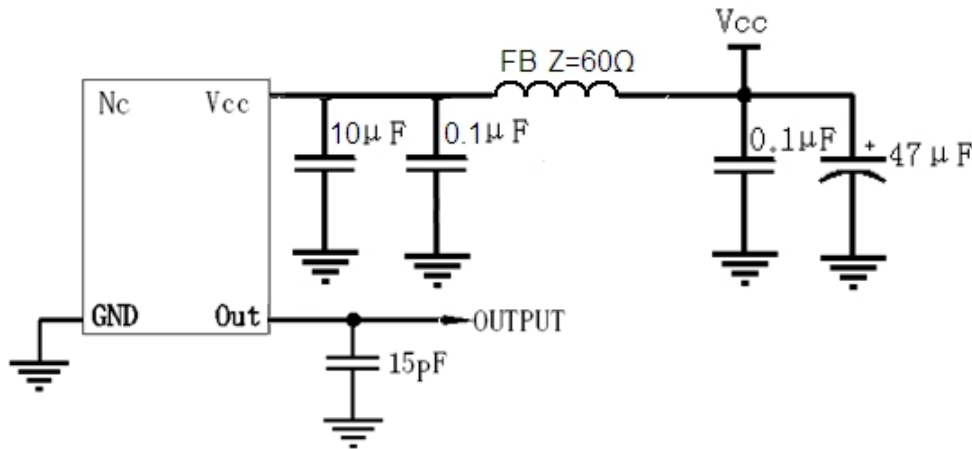

4、 Reflow Soldering Curve (RoHS)

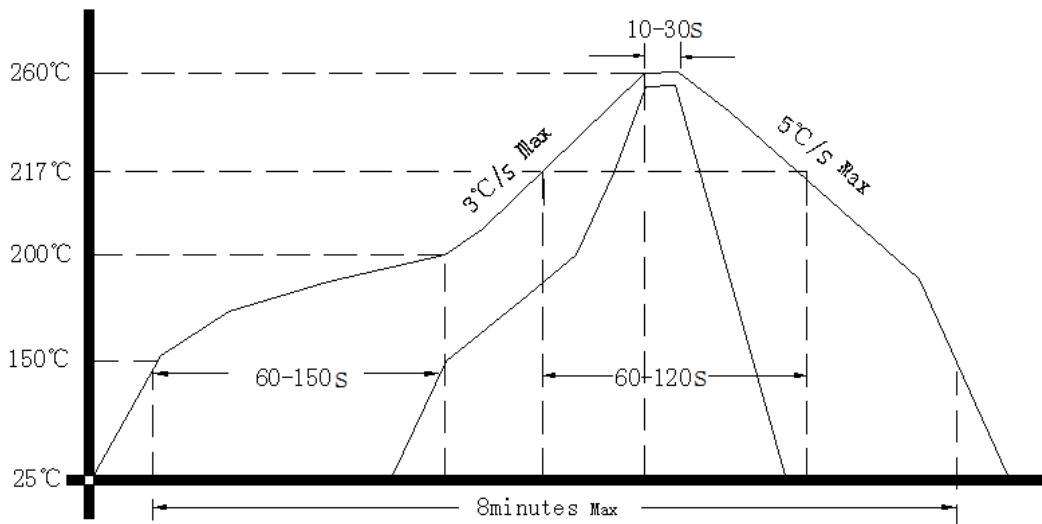

Note: passing through reflow upside down is not supported

5、 Package (mm)

