

Travelling Merchant: _____

DATASHEET

Standard: O23B-E325-10.00MHz-A

P/N: _____

| Plot | | | The Label |
|------------------|---------|----------|------------------------|
| Drew | Audited | Approved | Stamp, please! Thanks! |
| | | | |
| Date: 2019.06.04 | | | |

Guangdong Dapu Telecom Technology Co.,Ltd

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



1. Electrical Parameters



| MODEL: O23B-E325-10.00MHZ-A | | | | | | |
|-----------------------------|---|------------|------|-------|-------------------|---|
| Item | Description | Parameters | | | Unit | Test Condition |
| | | Min. | Typ. | Max. | | |
| Output | Frequency | 10.00 | | | MHz | |
| | Output Waveform | HCMOS | | | | |
| | Output Low Voltage | | | 0.4 | V | $V_{cc}=5.0V, O_{load}=15pF$ |
| | Output High Voltage | 2.4 | | | V | $V_{cc}=5.0V, O_{load}=15pF$ |
| | Duty Cycle | 45 | 50 | 55 | % | @50% |
| | Rise / Fall Time (10%~90%) | | | 10 | ns | |
| | Load | 15 | | | pF | |
| Frequency Stabilities | Frequency Tolerance vs. Operating Temperature Range | -0.2 | | +0.2 | $\times 10^{-9}$ | T_A varied from $-40^{\circ}C$ to $85^{\circ}C$, measurement referenced to frequency observed with $f_{ref}=(f_{max}+f_{min})/2, V_{cc}=5.0V, O_{load}=15pF$, temperature variable speed less than $2^{\circ}C$ per minute. |
| | Initial Frequency Tolerance | -0.05 | | +0.05 | $\times 10^{-6}$ | Measurement referenced to frequency observed with $T_A=25^{\circ}C, V_{cc}=5.0V, V_c=2.5V$, and after 15 minutes of operation, within 30 days after ex-works. |
| | Frequency Tolerance vs. Supply Voltage | -0.1 | | +0.1 | $\times 10^{-9}$ | measurement referenced to frequency observed $T_A=25^{\circ}C, V_{cc}$ varied from 4.75V to 5.25V, $V_c=2.5V$ and $O_{Load}=15pF$. |
| | Frequency Tolerance vs. Load | -0.1 | | +0.1 | $\times 10^{-9}$ | 5% load change measurement referenced to frequency observed with $T_A=25^{\circ}C, V_{cc}=5.0V, V_c=2.5V$, and $O_{Load}=15pF$. |
| | Short-Term Stability: Allan Variance | | | 5 | $\times 10^{-12}$ | Temperature stability, no EMI\EMC or other interference, test after power for 1hour ref. to $25^{\circ}C$; 1s, using PN9000 equipment. |
| | Aging Tolerance Per Day | -0.2 | | +0.2 | $\times 10^{-9}$ | V_{cc}, V_c, T_A constant measurement referenced to frequency observed with $T_A=25^{\circ}C, V_{cc}=5.0V, V_c=2.5V$, and after 30 days of operation. |
| | Aging Tolerance 1 Year | -0.02 | | +0.02 | $\times 10^{-6}$ | |



| | | | | | | |
|---------------------------------|--|---|------|-------|------------------|--|
| Power Supply | Supply Voltage | 4.75 | 5.0 | 5.25 | V | |
| | Steady Consumption | | | 600 | mA | @25°C |
| | Warm up current | | | 1600 | mA | |
| | Warm-Up Time | | | 5 | min | @25°C within $\pm 0.015 \times 10^{-6}$ of final frequency with reference after 1 hour on. |
| Voltage Control Characteristics | Frequency Tuning Range | -0.5 | | -0.3 | $\times 10^{-6}$ | $V_c=0V$. measurement referenced to $V_c=2.5V$ |
| | | -0.05 | | +0.05 | $\times 10^{-6}$ | $V_c=2.5V$. measurement referenced to exactly 10.00MHz |
| | | +0.3 | | +0.5 | $\times 10^{-6}$ | $V_c=5.0V$. measurement referenced to $V_c=2.5V$ |
| | Linearity | | | 10 | % | |
| | Slope | Positive | | | | |
| | Input Impedance | 100 | | | K Ω | |
| Phase Noise | Phase Noise @25°C | | -130 | -120 | dBc/Hz | 10Hz |
| | | | -145 | -135 | | 100Hz |
| | | | -150 | -145 | | 1KHz |
| | | | -150 | -145 | | 10KHz |
| | | | -150 | -145 | | 100KHz |
| | | | -150 | -145 | | 1MHz |
| Environmental Conditions | Operable Temperature | -40 | | +85 | °C | |
| | Storage Temperature | -55 | | +105 | °C | |
| | ESD Level | Human Body Model, class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010. | | | | |
| | | Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010. | | | | |
| | Moisture Sensitivity Level | Not humidity sensitive. | | | | |
| | Vibration | Test Condition: 0.75mm ;acceleration:10g;10Hz~500Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X , Y , Z), IEC 68-2-06 Test Fc. | | | | |
| Shock | 50g; 11ms; half sine wave (3 times for each 3 directions X, Y, Z), IEC 68-2-27 Test Ea/Severity 50A. | | | | | |
| Full Package Storage | Relative Humidity (%) | 20%-70% | | | | |
| | Temperature(°C) | -30~35°C | | | | |




2. Mechanical Structure (mm)

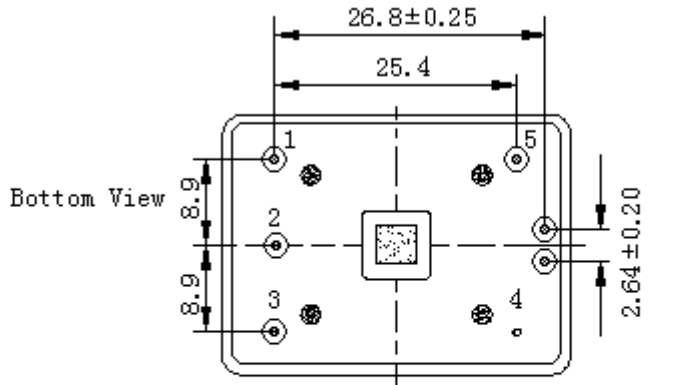

Right View


Side View

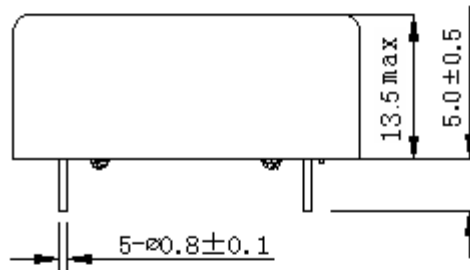

PIN FUNCTION

| PIN | FUNCTION |
|-----|----------|
| 1 | VCC |
| 2 | NC |
| 3 | VC |
| 4 | GND |
| 5 | OUTPUT |

Top View

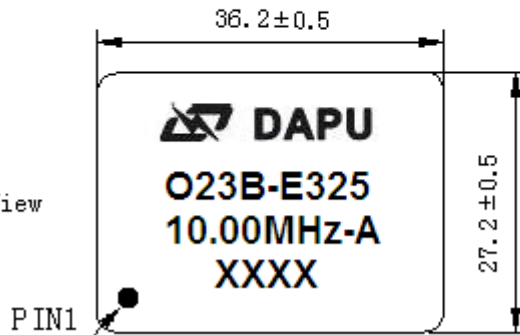

Note1: Tolerance ± 0.2 mm without mark


Note2: The first two xx representative: week
After two xx representative: year

Note3: Referential Weight 20.7g


Note4: NC is not connect



3. Test Circuit

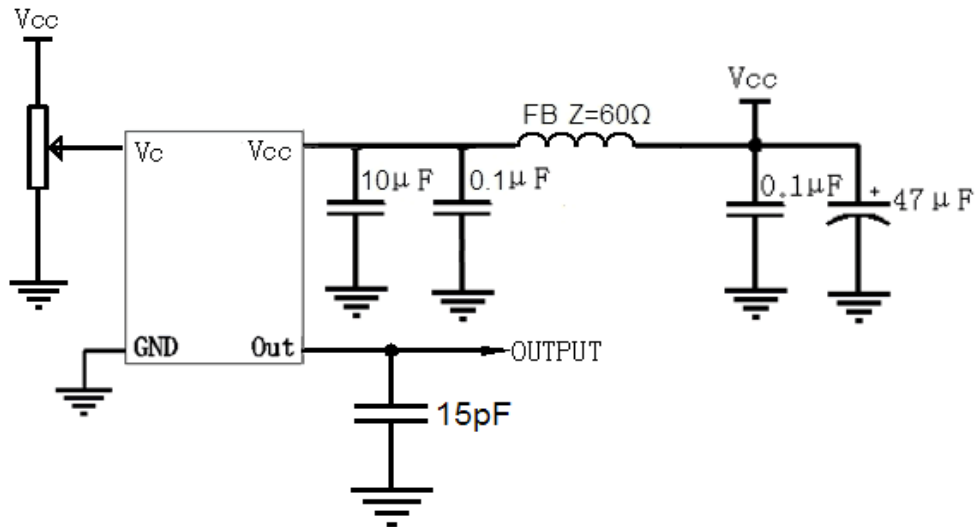

4. Reflow Soldering Curve (RoHS)

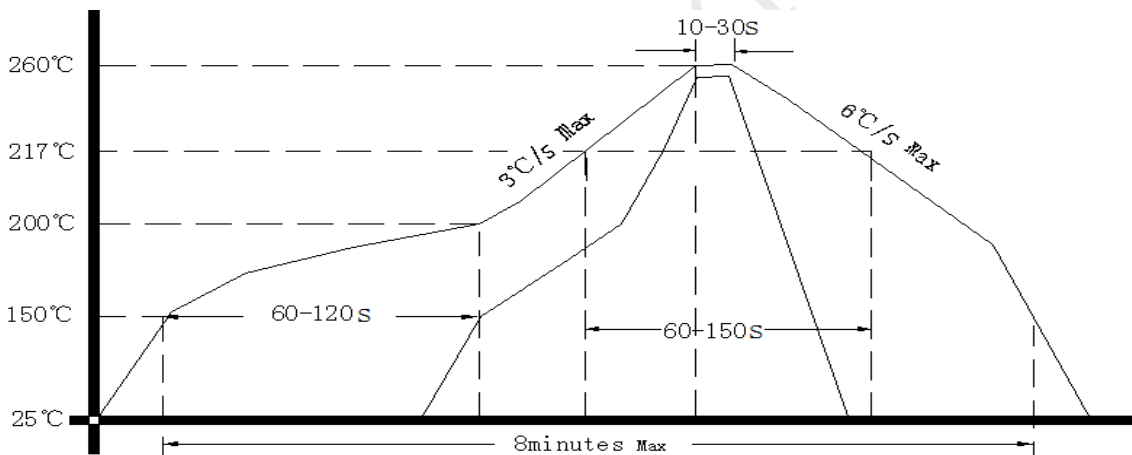

5. Package (mm)

