

Customer Code : _____

DATASHEET

DAPU P/N: **T53-F586-38.40MHz**

Customer P/N: _____

| DAPU | | | Customer Approval |
|------------------|---------|----------|------------------------|
| Drew | Audited | Approved | Stamp, please! Thanks! |
| | | | |
| Date: 2020.11.25 | | | |

Guangdong Dapu Telecom Technology Co.,Ltd

Bldg 16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



1. Electrical Parameters


| MODEL: T53-F586-38.40MHz | | | | | | |
|--------------------------|---|-------------------|------|------------------|-----------------------------------|---|
| Item | Description | Parameters | | | Unit | Test Condition |
| | | Min. | Typ. | Max. | | |
| Output | Frequency | 38.40 | | | MHz | |
| | Output Waveform | Clipped Sine Wave | | | | |
| | Vp-p | 0.8 | | | V | |
| | Start-up Time | | | 2 | ms | Time taken for output to reach 90% of specified output level. |
| | Load | 10KΩ//10pF | | | | |
| Frequency Stabilities | Frequency Tolerance vs. Operating Temperature Range | -0.25 | | +0.25 | $\times 10^{-6}$ | T_A varied from -40°C to 85°C , measurement referenced to frequency observed with $f_{ref}=(f_{max}+f_{min})/2$, $V_{cc}=2.85\text{V}$, $V_c=1.5\text{V}$, $O_{load}=10\text{K}\Omega//10\text{pF}$, temperature variable speed less than 1°C per minute. |
| | Initial Frequency Tolerance | -1 | | +1 | $\times 10^{-6}$ | Measurement referenced to frequency observed with $T_A=25^{\circ}\text{C}$, $V_{cc}=2.85\text{V}$, $V_c=1.5\text{V}$ within 30 days after ex-works. |
| | Reflow Shift | -1 | | +1 | $\times 10^{-6}$ | Two consecutive reflows as per attached profile after 2hours relaxation at 25°C . |
| | Frequency slope | -0.1 | | +0.1 | $\times 10^{-6}/^{\circ}\text{C}$ | Minimum of one frequency reading every 2°C over the operating temperature range. |
| | Frequency Tolerance vs. Supply Voltage | -0.1 | | +0.1 | $\times 10^{-6}$ | measurement referenced to frequency observed $T_A=25^{\circ}\text{C}$, V_{cc} varied from 2.7V to 3.0V, $V_c=1.5\text{V}$ and $O_{Load}=10\text{K}\Omega//10\text{pF}$. |
| | Frequency Tolerance vs. Load | -0.2 | | +0.2 | $\times 10^{-6}$ | 10% load change measurement referenced to frequency observed with $T_A=25^{\circ}\text{C}$, $V_{cc}=2.85\text{V}$, $V_c=1.5\text{V}$ and $O_{Load}=10\text{K}\Omega//10\text{pF}$. |
| | Aging Tolerance Per Day | -0.02 | | +0.02 | $\times 10^{-6}$ | $T_A=25^{\circ}\text{C}$, $V_{cc}=2.85\text{V}$, $V_c=1.5\text{V}$ and after 1h of operation. |
| | Aging Tolerance 1 Month | -0.2 | | +0.2 | $\times 10^{-6}$ | |
| | Aging Tolerance 1 Year | -1 | | +1 | $\times 10^{-6}$ | |
| Aging Tolerance 3 Year | -2 | | +2 | $\times 10^{-6}$ | | |
| Power Supply | Operating Current | | | 3.7 | mA | @ 25°C , $V_{cc}=2.85\text{V}$, $V_c=1.5\text{V}$, $O_{Load}=10\text{K}\Omega//10\text{pF}$. |
| | Supply Voltage | 2.7 | 2.85 | 3.0 | V | |




| | | | | | | |
|--------------------------|---|---|------|------|------------------|--|
| Voltage Control | Frequency tuning range | -10 | | -5 | $\times 10^{-6}$ | $V_c=0.5V$. measurement referenced to $V_c=1.5V$. |
| | | -1 | | +1 | $\times 10^{-6}$ | $V_c=1.5V$. measurement referenced to Exactly 38.40MHz. |
| | | +5 | | +10 | $\times 10^{-6}$ | $V_c=2.5V$. measurement referenced to $V_c=1.5V$. |
| | Linearity | | | 10 | % | |
| | Slope | Positive | | | | |
| Input Impedance | 100 | | | | K Ω | |
| Phase Noise | Phase Noise @25°C | | -55 | | dBc/Hz | 1Hz |
| | | | -84 | | | 10Hz |
| | | | -108 | | | 100Hz |
| | | | -130 | | | 1KHz |
| | | | -148 | | | 10KHz |
| | | | -153 | | | 100KHz |
| | | | -153 | | | 1MHz |
| RMS Phase Jitter | | 0.3 | | ps | 12KHz to 5MHz | |
| Environmental Conditions | Operable Temperature | -40 | | +85 | °C | |
| | Storage Temperature | -55 | | +125 | °C | |
| | ESD Level | Human Body Model, class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010. | | | | |
| | | Machine Model, class B: 200V to 400V; JEDEC JESD22-A115C. | | | | |
| | Moisture Sensitivity Level | Level 3. | | | | |
| | Vibration | Test Condition: 0.75mm ;acceleration:10g;10Hz~2000Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X ,Y , Z) .IEC 68-2-06 Test Fc. | | | | |
| Shock | 100g; 6ms; half sine wave (3 times for each 3 directions X ,Y , Z),IEC 68-2-27 Test Ea/Severity 50A. | | | | | |
| Full Package Storage | Relative humidity (%) | 20%~70% | | | | |
| | Temperature (°C) | -10~35°C | | | | |



2. Mechanical Structure(mm)

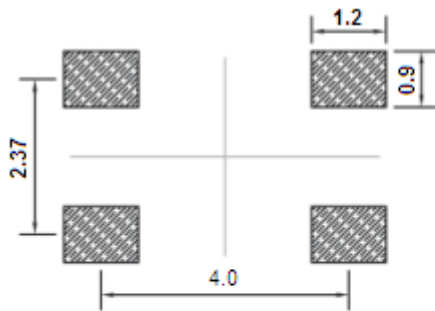

Solder pad layout

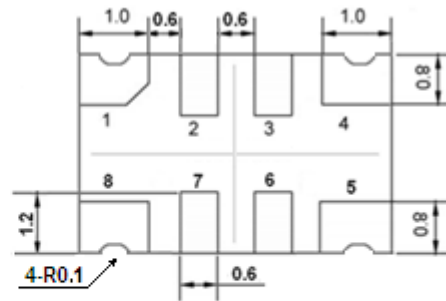

Bottom view




Right view



Side view

PIN FUNCTION

| PIN | NOTATION | FUNCTION |
|------|----------|-----------------|
| 1 | VC | Control Voltage |
| 2, 3 | NC | Not Connect |
| 4 | GND | GND |
| 5 | OUTPUT | RF Output |
| 6, 7 | NC | Not Connect |
| 8 | VCC | Supply Voltage |

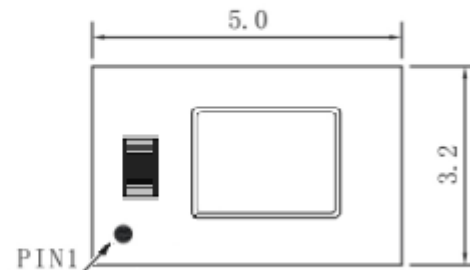


Top view

Note1: Tolerance $\pm 0.2\text{mm}$ without mark


Note2: Referential weight 0.05g



3. Test Circuit

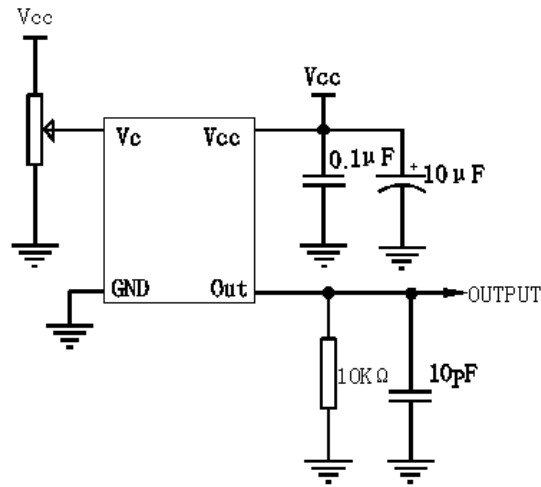

4. Reflow Soldering Curve (RoHS)

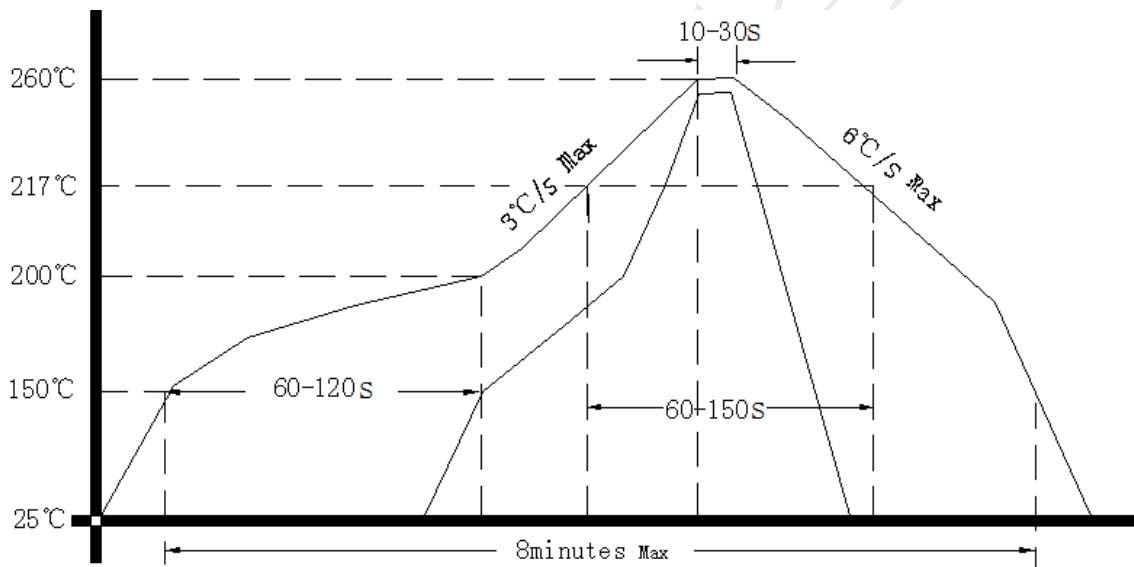

5. Package: Tape & Reel (mm)

