

CUSTOMER: _____

DATASHEET

PRODUCT TYPE: DPTC2016

DAPU P/N: T2016C-A579-38.40MHz-N

Plot			The Label
Drew	Audited	Approved	Stamp, please! Thanks!
LIN Jianhua	David	William	
Date: 2023.06.26			

Guangdong Dapu Telecom Technology Co.,Ltd

Building 5, No.24, Industrial East Road, Songshanhu Park, Dongguan, Guangdong, P.R. China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098




1. Electrical Parameters

MODEL: T2016C-A579-38.40MHz-N						
Item	Description	Parameters			Unit	Test Condition
		Min.	Typ.	Max.		
Output	Frequency	38.40			MHz	
	Output Waveform	Clipped Sine Wave				
	Vp-p	0.8			V	
	Load	10KΩ//10pF				
Frequency Stabilities	Frequency Tolerance	-1.5		+1.5	$\times 10^{-6}$	@25 ± 2°C, 2H, after 2 times reflow soldering, base on nominal frequency.
	vs. Temperature	-0.5		+0.5	$\times 10^{-6}$	T _A varied from -40°C to 85°C, measurement referenced to frequency observed with f _{ref} =(f _{max} +f _{min})/2, V _{cc} =1.8V, O _{load} =10KΩ//10pF, temperature variable speed less than 2°C per minute.
	vs. Supply Voltage	-0.1		+0.1	$\times 10^{-6}$	measurement referenced to frequency observed T _A =25°C, V _{cc} = 1.8 ± 5%, and O _{Load} =10KΩ//10pF.
	vs. Load	-0.1		+0.1	$\times 10^{-6}$	10% load change measurement referenced to frequency observed with T _A =25°C, V _{cc} =1.8V, and O _{Load} =10KΩ//10pF.
	Aging Tolerance 1 Year	-1		+1	$\times 10^{-6}$	T _A =25°C, V _{cc} =1.8V, and after 1h of operation.
	Frequency Slope	-0.1		0.1	ppm/°C	T _A varied from -40°C to 85°C
Power Supply	Current consumption			3	mA	@25°C, V _{cc} =1.8V, O _{Load} =10KΩ//10pF.
	Start up Time			2	ms	More than 90% of final output voltage
	Supply Voltage	1.71	1.8	1.89	V	
SSB Phase Noise	Phase Noise@25 ± 2°C		-82	-76	dBc/Hz	10Hz
			-114	-108		100Hz
			-142	-135		1KHz
			-152	-145		10KHz
			-157	-152		100KHz
			-157	-152		1MHz



Environmental Conditions	Operable Temperature	-40	+85	°C
	Storage Temperature	-55	+105	°C
	ESD Level	Human Body Model, class2: 2000V; ANSI/ESDA/JEDEC JS-001-2010.		
		Machine Model, class B: 200V; JEDEC JESD22-A115C.		
	Moisture Sensitivity Level	Level 1.		
	Vibration	Test Condition: 0.75mm ;acceleration:10g;10Hz~2000Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X ,Y , Z) .IEC 68-2-06 Test Fc.		
Shock	100g; 6ms; half sine wave (3 times for each 3 directions X ,Y , Z),IEC 68-2-27 Test Ea/Severity 50A.			
Full Package Storage	Relative humidity (%)	20%~70%		
	Temperature (°C)	-10~35°C		

2. Mechanical Structure(mm)

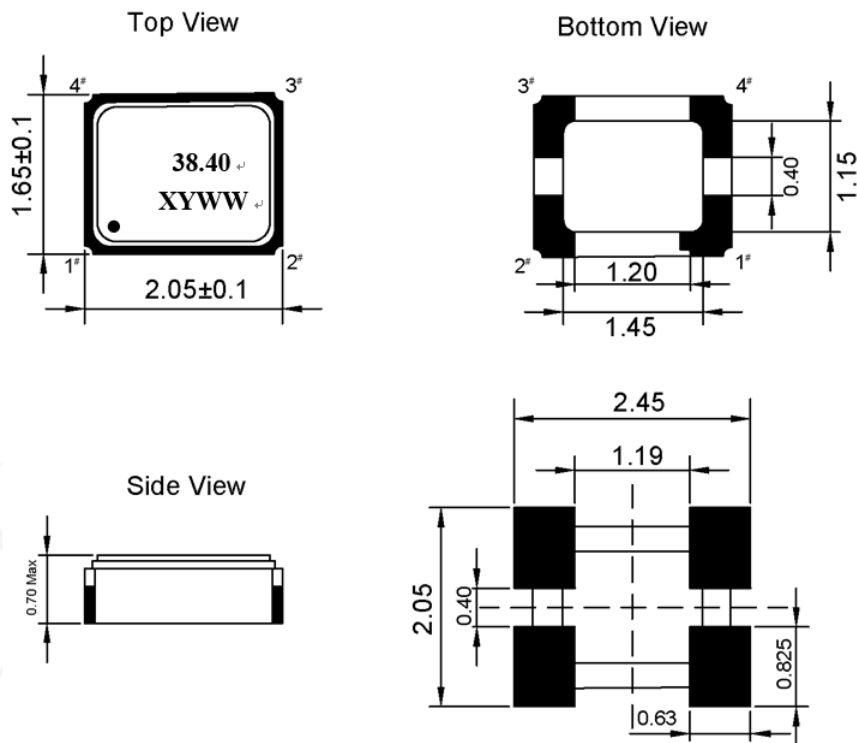

PIN NAME	CONNECTION
PIN1	NC
PIN2	GND
PIN3	OUTPUT
PIN4	VCC


Note1: N/C is not connected




3. Marking Information


<p>38.40: Frequency 38.40Mhz X: Lot No. Y: Year WW: Week ● : Pin1 Index</p>	
--	--

4. Test Circuit

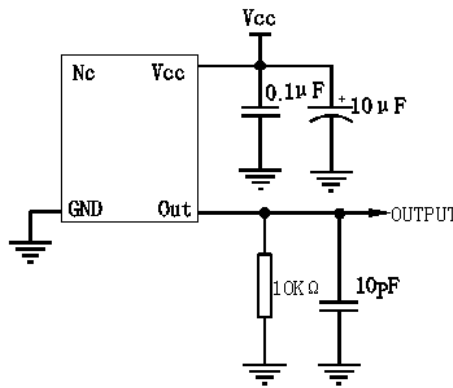


5. Reflow Soldering Curve (RoHS)

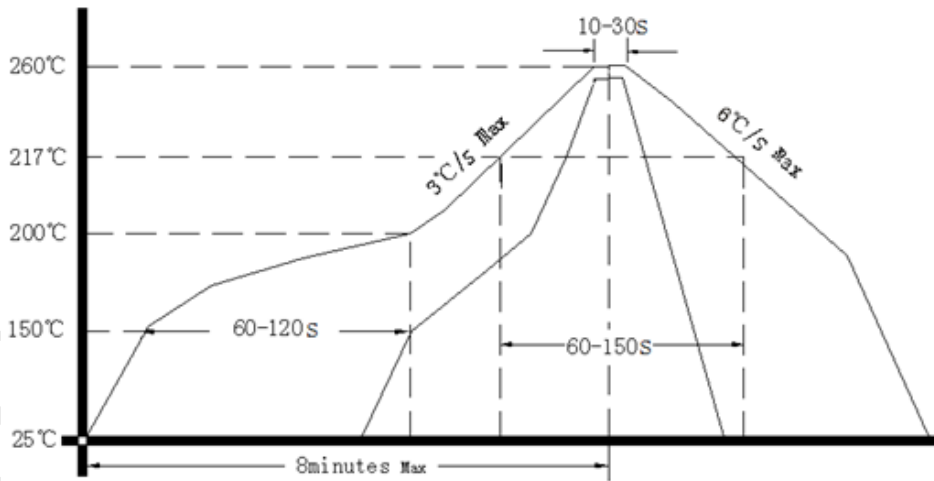

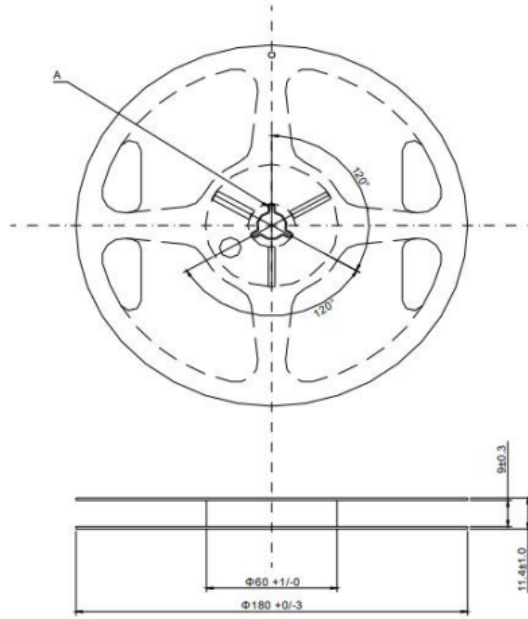

Material:Polystyrene (Conductivity)
unit:mm

Section A



DAPU Cont.