



1. Electrical Parameters


| MODEL: T75A-1801-38.88MHz | | | | | | |
|---------------------------|---|------------|------|-------|------------------|--|
| Item | Description | Parameters | | | Unit | Test Condition |
| | | Min. | Typ. | Max. | | |
| Output | Frequency | 38.88 | | | MHz | |
| | Output Waveform | HCMOS | | | | |
| | Output Low Voltage | | | 0.33 | V | $V_{cc}=3.3V, O_{load}=15\text{ pF}$ |
| | Output High Voltage | 2.97 | | | V | $V_{cc}=3.3V, O_{load}=15\text{ pF}$ |
| | Duty Cycle | 45 | 50 | 55 | % | @50% |
| | Rise / Fall Time (10%~90%) | | | 5 | ns | @25°C |
| | Spurious suppression | | | 5 | dBc | |
| | Start up time | | | 10 | ms | |
| | Load | 15 | | | pF | |
| Frequency Stabilities | Overall Tolerance | -7 | | +7 | $\times 10^{-6}$ | Including 10 years of 85°C aging. |
| | Frequency Tolerance vs. Operating Temperature Range | -0.5 | | +0.5 | $\times 10^{-6}$ | T_A varied from -40°C to 105°C, measurement referenced to frequency observed with $f_{ref}=(f_{max}+f_{min})/2, V_{cc}=3.3V, O_{load}=15\text{ pF}$, temperature variable speed less than 2°C per minute. |
| | Initial Frequency Tolerance | -1.5 | | +1.5 | $\times 10^{-6}$ | Measurement referenced to frequency observed with $T_A=25^\circ\text{C}, V_{cc}=3.3V$ within 30 days after ex-works. |
| | Frequency Tolerance vs. Supply Voltage | -0.1 | | +0.1 | $\times 10^{-6}$ | measurement referenced to frequency observed $T_A=25^\circ\text{C}, V_{cc}$ varied from 3.13V to 3.47V, and $O_{Load}=15\text{ pF}$. |
| | Frequency Tolerance vs. Load | -0.1 | | +0.1 | $\times 10^{-6}$ | 5% load change measurement referenced to frequency observed with $T_A=25^\circ\text{C}, V_{cc}=3.3V, O_{Load}=15\text{ pF}$. |
| | Short-Term Stability | | | 0.1 | $\times 10^{-9}$ | No temperature change. |
| | Frequency Slope | -0.05 | | +0.05 | $\times 10^{-6}$ | Temperature ramp 2°C/minute, Test interval: test per 1°C |




| | | | | | | |
|--------------------------|--|--|-----|------|--------|--|
| Power Supply | Current Consumption | | | 10 | mA | @25°C, V _{cc} =3.3V, O _{Load} =15pF. |
| | Supply Voltage | 3.13 | 3.3 | 3.47 | V | |
| Phase Noise | Phase Noise | | | -53 | dBc/Hz | 1Hz |
| | | | | -88 | | 10Hz |
| | | | | -112 | | 100Hz |
| | | | | -135 | | 1KHz |
| | | | | -142 | | 10KHz |
| | | | | -145 | | 40KHz |
| | | | | -150 | | 100KHz |
| | | | | -150 | | 1MHz |
| Jitter | Jitter | | | 1 | ps-rms | 10Hz-100KHz |
| Environmental Conditions | Operable Temperature | -40 | | +105 | °C | |
| | Storage Temperature | -55 | | +125 | °C | |
| | ESD Level | Human Body Model,class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010. | | | | |
| | | Machine Model, class B: 200V to 400V; JEDEC JESD22-A115C. | | | | |
| | Moisture Sensitivity Level | Level 3. | | | | |
| | Vibration | Test Condition: 0.75mm ;acceleration:10g;10Hz~2000Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X , Y , Z).IEC 68-2-06 Test Fc. | | | | |
| Shock | 100g; 6ms; half sine wave (3 times for each 3 directions X , Y , Z),IEC 68-2-27 Test Ea/Severity 50A. | | | | | |




2. Mechanical Structure(mm)

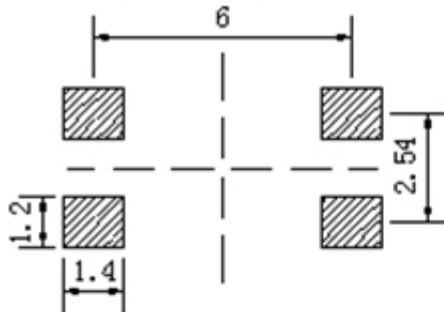


Solder pad layout

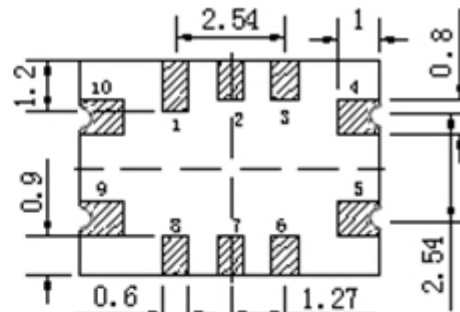

Bottom view




Right view

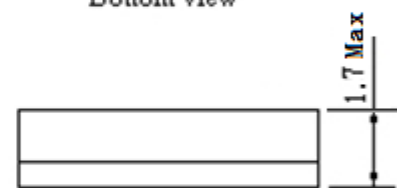

Front view

PIN FUNCTION

| PIN | NOTATION | FUNCTION |
|---------------|----------|----------------|
| 1, 2, 3, 6, 7 | NC | Not Connect |
| 4 | GND | GND |
| 5 | OUTPUT | RF Output |
| 8 | NC | Not Connect |
| 9 | VCC | Supply Voltage |
| 10 | NC | Not Connect |

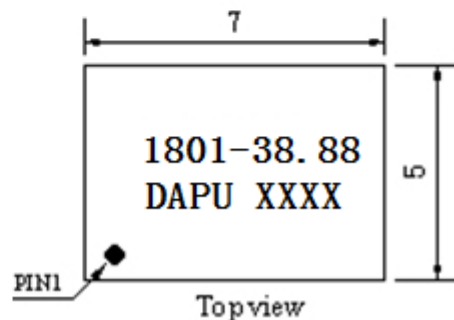

Topview

Note1: Tolerance $\pm 0.25\text{mm}$ without mark


Note2: The first two xx representative: year
After two xx representative: week

Note3: Referential Weight 0.2g


Note4: NC is not connect



3. Test circuit

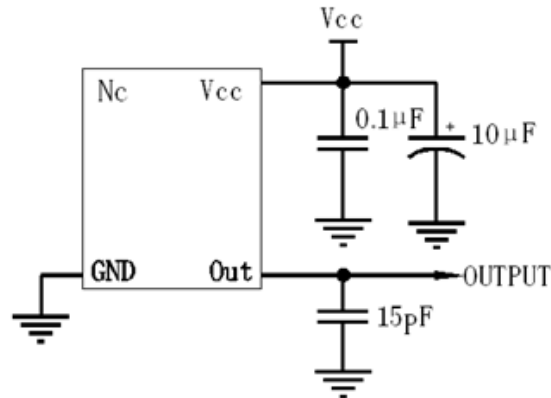

4. Reflow Soldering Curve (RoHS)

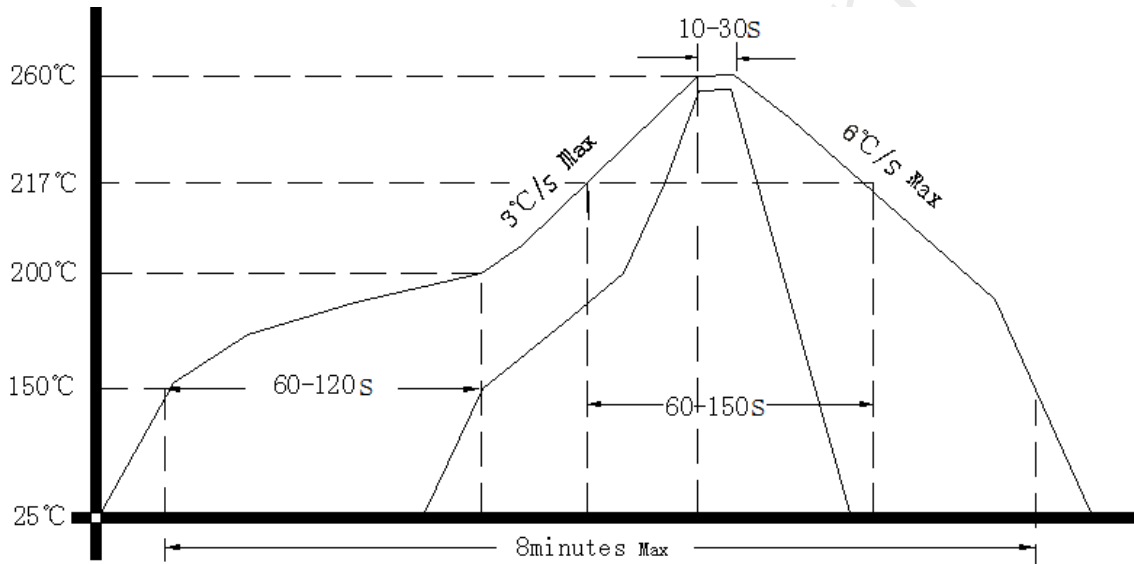

5. Package: Tape & Reel (mm)

