

Travelling Merchant: _____

DATASHEET

Standard: **T53-G513-25.00MHz**

P/N: _____

Plot			The Label
Drew	Audited	Approved	Stamp, please! Thanks!
Date: 2022.03.22			

Guangdong Dapu Telecom Technology Co.,Ltd

Building 5, No.24, Industrial East Road, Songshanhu Park, Dongguan, Guangdong, P.R. China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



Table of amendment

Version	Revision contents	Prepared by	Revised date
1.0	The first issued	<i>Amway</i>	2019.09.03
1.1	The “Supply Voltage” changed	<i>Amway</i>	2021.09.22
1.2	The “Marking” changed	<i>Amway</i>	2022.03.22



1. Electrical Parameters


MODEL: T53-G513-25.00MHz						
Item	Description	Parameters			Unit	Test Condition
		Min.	Typ.	Max.		
Output	Frequency	25.00			MHz	
	Output Waveform	Clipped Sine Wave				
	Vp-p	0.8			V	
	Start-up Time			15	ms	90% amplitude
	Load	10KΩ//10pF				
Frequency Stabilities	Frequency Tolerance vs. Operating Temperature Range	-0.5		+0.5	$\times 10^{-6}$	T _A varied from -40°C to 85°C, measurement referenced to frequency observed with $f_{ref}=(f_{max}+f_{min})/2$, V _{cc} =3.0V, V _c =1.5V, O _{load} =10KΩ//10pF, temperature variable speed less than 2°C per minute.
	Nominal Frequency Tolerance	-1		+1	$\times 10^{-6}$	Measurement referenced to frequency observed with T _A =25°C, V _{cc} =3.0V, V _c =1.5V within 30 days after ex-works.
	Frequency Tolerance vs. Supply Voltage	-0.025		+0.025	$\times 10^{-6}$	measurement referenced to frequency observed T _A =25°C, V _{cc} varied from 2.85V to 3.15V, V _c =1.5V and O _{Load} =10KΩ//10pF.
	Frequency Tolerance vs. Load	-0.05		+0.05	$\times 10^{-6}$	5% load change measurement referenced to frequency observed with T _A =25°C, V _{cc} =3.0V, V _c =1.5V and O _{Load} =10KΩ//10pF.
	Slope Over Temperature	-0.2		+0.2	$\times 10^{-6}/^{\circ}\text{C}$	
	Reflow Shift	-0.5		+0.5	$\times 10^{-6}$	Pre to post reflow ΔF(measured ≥60 min after reflow)
	Acceleration Stability		<2		$\times 10^{-9}/\text{g}$	
	Root Allan Variance		0.1	1	$\times 10^{-9}$	Tau=1.0s
	Aging Tolerance 1 Year	-1		+1	$\times 10^{-6}$	T _A =25°C, V _{cc} =3.0V, V _c =1.5V and after 1h of operation.
	Aging Tolerance 10 Year	-3		+3	$\times 10^{-6}$	
Power Supply	Supply Current		3	4	mA	@25°C, V _{cc} =3.0V, V _c =1.5V, O _{Load} =10KΩ//10pF.
	Supply Voltage	2.85	3.0	3.6	V	




Voltage Control	Frequency tuning range	-10	-5	$\times 10^{-6}$	$V_c=0.5V$. measurement referenced to $V_c=1.5V$.	
		-1	+1	$\times 10^{-6}$	$V_c=1.5V$. measurement referenced to Exactly 25.00MHz.	
		+5	+10	$\times 10^{-6}$	$V_c=2.5V$. measurement referenced to $V_c=1.5V$.	
	Linearity		10	%		
	Slope		+7	ppm/V		
	Input Impedance	100		$K\Omega$		
Phase Noise	Phase Noise		-60	dBc/Hz	1Hz	
			-90		10Hz	
			-114		100Hz	
			-137		1KHz	
			-153		10KHz	
			-155		100KHz	
			-155		1MHz	
RMS Jitter	RMS Jitter	700	fs	12KHz-5MHz		
Environmental Conditions	Operable Temperature	-40	+85	$^{\circ}C$		
	Storage Temperature	-55	+105	$^{\circ}C$		
	ESD Level	Human Body Model,class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010.				
		Machine Model, class B: 200V to 400V; JEDEC JESD22-A115C.				
	Moisture Sensitivity Level	Level 3.				
	Vibration	Test Condition: 0.75mm ;acceleration:10g;10Hz~2000Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X ,Y , Z) .IEC 68-2-06 Test Fc.				
Shock	100g; 6ms; half sine wave (3 times for each 3 directions X ,Y, Z),IEC 68-2-27 Test Ea/Severity 50A.					
Full Package Storage	Relative humidity (%)	20%~70%				
	Temperature ($^{\circ}C$)	-10~35 $^{\circ}C$				



2. Mechanical Structure(mm)

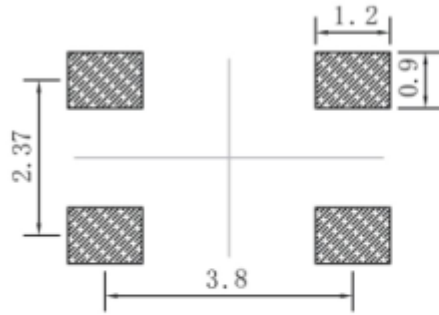

Solder pad layout

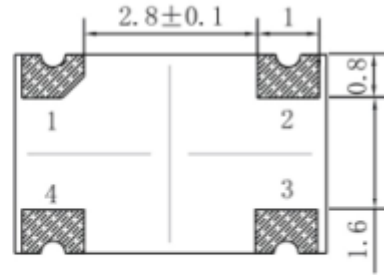

Bottom view




Right view



Side view

PIN FUNCTION

PIN	NOTATION	FUNCTION
1	VC	Control Voltage
2	GND	GND
3	OUTPUT	RF Output
4	VCC	Supply Voltage

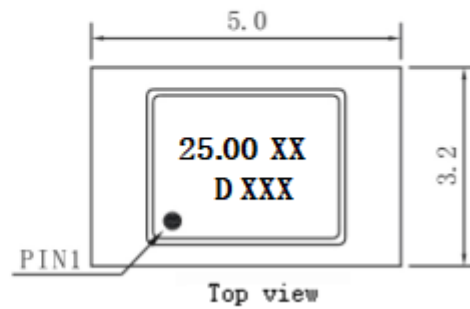

Top view

Note1: Tolerance $\pm 0.2\text{mm}$ without mark


Note2: Referential weight 0.05g

Note3: The first two xx is Model code ,


After three xxx is year(1 digit)+week(2digits),e.g.2021/1/1—101.



3. Test Circuit

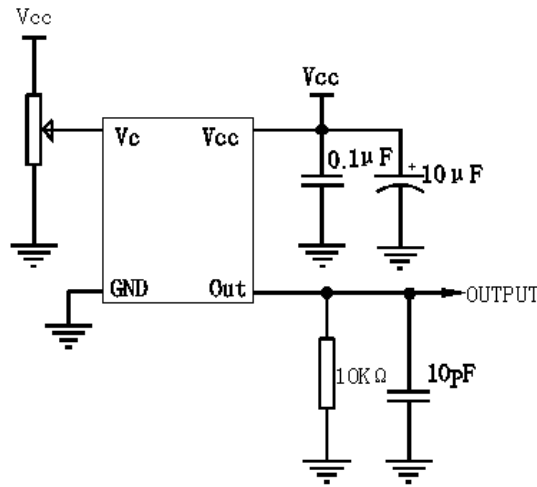

4. Reflow Soldering Curve (RoHS)

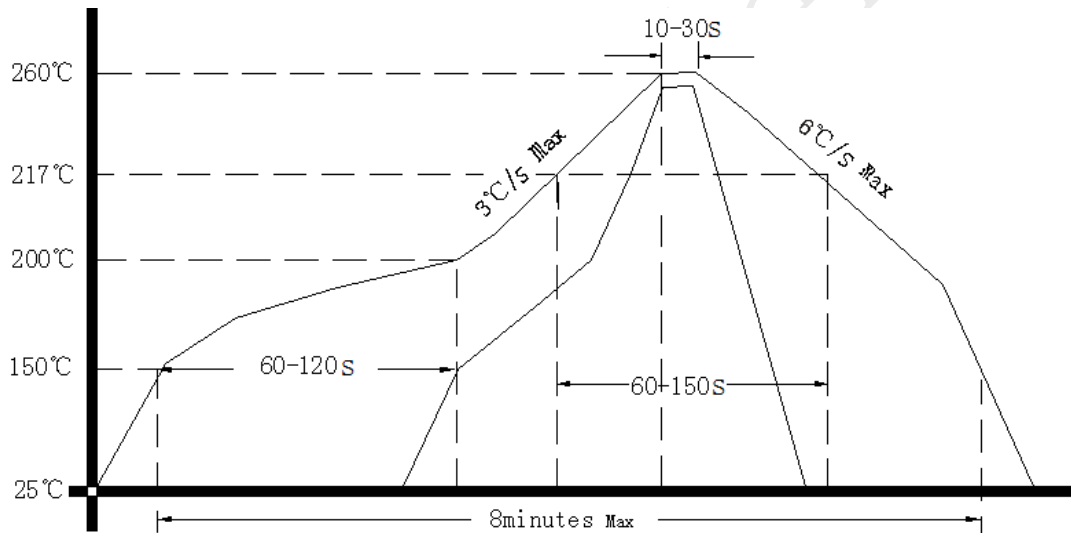

5. Package: Tape & Reel (mm)

