

Travelling Merchant: \_\_\_\_\_

# DATASHEET

Standard:     **T75B-L313-30.72MHz**    

P/N: \_\_\_\_\_

| Plot             |         |          | The Label              |
|------------------|---------|----------|------------------------|
| Drew             | Audited | Approved | Stamp, please! Thanks! |
|                  |         |          |                        |
| Date: 2017.02.14 |         |          |                        |

## Guangdong Dapu Telecom Technology Co.,Ltd

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888    FAX: 0086-0769-81800098



### Table of amendment

| Version | Revision contents | Prepared by  | Revised date |
|---------|-------------------|--------------|--------------|
| 1.0     | The first issued  | <i>Amway</i> | 2017.02.14   |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |
|         |                   |              |              |



## 1. Electrical Parameters


| MODEL: T75B-L313-30.72MHz |   |            |      |       |                  |  |
|---------------------------|---|------------|------|-------|------------------|--|
| Item                      | Description   | Parameters |      |       | Unit             | Test Condition   |
|                           |   | Min.       | Typ. | Max.  |                  |  |
| Output                    | Frequency   | 30.72      |      |       | MHz              |  |
|                           | Output Waveform                                     | HCMOS      |      |       |                  |  |
|                           | Output Low Voltage                                  |            |      | 0.4   | V                | $V_{cc}=3.3V, O_{load}=15\text{ pF}$   |
|                           | Output High Voltage                                 | 2.4        |      |       | V                | $V_{cc}=3.3V, O_{load}=15\text{ pF}$   |
|                           | Duty Cycle  | 45         | 50   | 55    | %                | @50%   |
|                           | Rise / Fall Time<br>(10%~90%)                       |            |      | 8     | ns               | @25°C  |
|                           | Load  | 15         |      |       | pF               |  |
| Frequency Stabilities     | Frequency Tolerance vs. Operating Temperature Range | -0.14      |      | +0.14 | $\times 10^{-6}$ | $T_A$ varied from -40°C to 85°C, measurement referenced to frequency observed with $T_A = 25^\circ\text{C}, V_{cc}=3.3V, V_c=1.65V, O_{load}=15\text{pF}$ , temperature variable speed less than 2°C per minute. |
|                           | Initial Frequency Tolerance                         | -1.0       |      | +1.0  | $\times 10^{-6}$ | Measurement referenced to frequency observed with $T_A=25^\circ\text{C}, V_{cc}=3.3V, V_c=1.65V$ , within 30 days after ex-works.  |
|                           | Frequency Tolerance vs. Supply Voltage              | -0.14      |      | +0.14 | $\times 10^{-6}$ | measurement referenced to frequency observed $T_A=25^\circ\text{C}, V_{cc}$ varied from 3.13V to 3.47V, $V_c=1.65V$ , and $O_{Load}=15\text{pF}$ .   |
|                           | Frequency Tolerance vs. Load                        | -0.14      |      | +0.14 | $\times 10^{-6}$ | 5% load change measurement referenced to frequency observed with $T_A=25^\circ\text{C}, V_{cc}=3.3V, V_c=1.65V, O_{Load}=15\text{pF}$ .  |
|                           | Aging Tolerance Per Day                             | -0.02      |      | +0.02 | $\times 10^{-6}$ | $T_A=25^\circ\text{C}, V_{cc}=3.3V, V_c=1.65V$ , and after 1h of operation.  |
|                           | Aging Tolerance 1 Year                              | -1         |      | +1    | $\times 10^{-6}$ |  |
| Power Supply              | Current Consumption                                 |            |      | 8     | mA               | @25°C, $V_{cc}=3.3V, V_c=1.65V, O_{Load}=15\text{pF}$ .  |
|                           | Supply Voltage                                      | 3.13       | 3.3  | 3.47  | V                |  |



|                          |   |  |      |      |                  |   |
|--------------------------|---|--|------|------|------------------|---|
| Voltage Control          | Frequency tuning range  |  |      | -5   | $\times 10^{-6}$ | $V_c=0V$ . measurement referenced to $V_c=1.65V$ .        |
|                          |   | -1.0   |      | +1.0 | $\times 10^{-6}$ | $V_c=1.65V$ . measurement referenced to Exactly 30.72MHz. |
|                          |   | +5   |      |      | $\times 10^{-6}$ | $V_c=3.3V$ . measurement referenced to $V_c=1.65V$ .      |
|                          | Linearity   |  |      | 10   | %                |   |
|                          | Slope   | Positive   |      |      |                  |   |
|                          | Input Impedance   | 100  |      |      |                  | K $\Omega$  |
| Phase Noise              | Phase Noise   |  | -75  | -70  | dBc/Hz           | 10Hz  |
|                          |   |  | -105 | -100 |                  | 100Hz   |
|                          |   |  | -130 | -125 |                  | 1KHz  |
|                          |   |  | -145 | -140 |                  | 10KHz   |
|                          |   |  | -145 | -140 |                  | 100KHz  |
|                          |   |  | -150 | -145 |                  | 1MHz  |
| Environmental Conditions | Operable Temperature  | -40  |      | +85  | $^{\circ}C$      |   |
|                          | Storage Temperature   | -55  |      | +105 | $^{\circ}C$      |   |
|                          | ESD Level   | Human Body Model,class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010.  |      |      |                  |   |
|                          |   | Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010.   |      |      |                  |   |
|                          | Moisture Sensitivity Level  | Level 2.   |      |      |                  |   |
|                          | Vibration   | Test Condition: 0.75mm ;acceleration:10g;10Hz~2000Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X ,Y , Z ) .IEC 68-2-06 Test Fc. |      |      |                  |   |
| Shock                    | 100g; 6ms; half sine wave (3 times for each 3 directions X ,Y , Z ),IEC 68-2-27 Test Ea/Severity 50A. |  |      |      |                  |   |
| Full Package Storage     | Relative humidity (%)   | 20% ~70%   |      |      |                  |   |
|                          | Temperature ( $^{\circ}C$ )   | -10~35 $^{\circ}C$   |      |      |                  |   |




## 2. Mechanical Structure(mm)

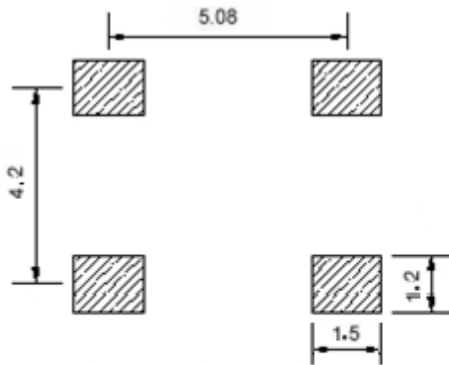


Solder pad layout




Right view

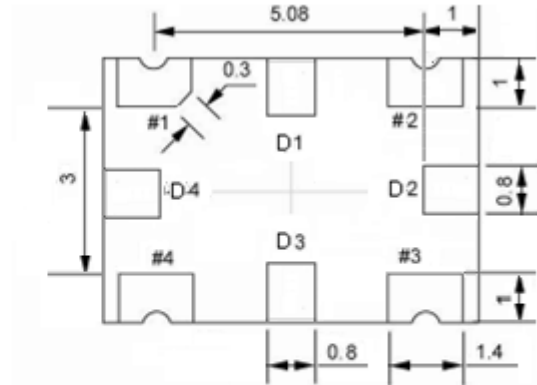

Bottom view

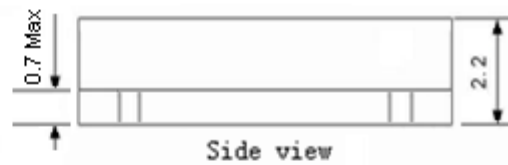

Side view

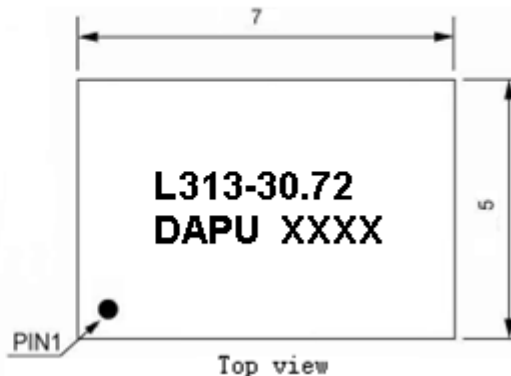

Top view

### PIN FUNCTION

| PIN            | NOTATION | FUNCTION        |
|----------------|----------|-----------------|
| D1, D2, D3, D4 | NC       | Not Connect     |
| 1              | VC       | Control Voltage |
| 2              | GND      | GND             |
| 3              | OUTPUT   | RF Output       |
| 4              | WCC      | Supply Voltage  |

**Note1:** Tolerance  $\pm 0.2\text{mm}$  without mark


**Note2:** The first two xx representative: week  
After two xx representative: year

**Note3:** Referential weight 0.2g


**Note4:** NC is not connect



### 3. Test circuit

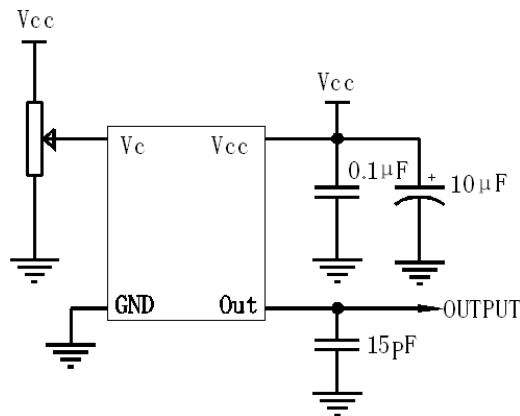

### 4. Reflow Soldering Curve (RoHS)

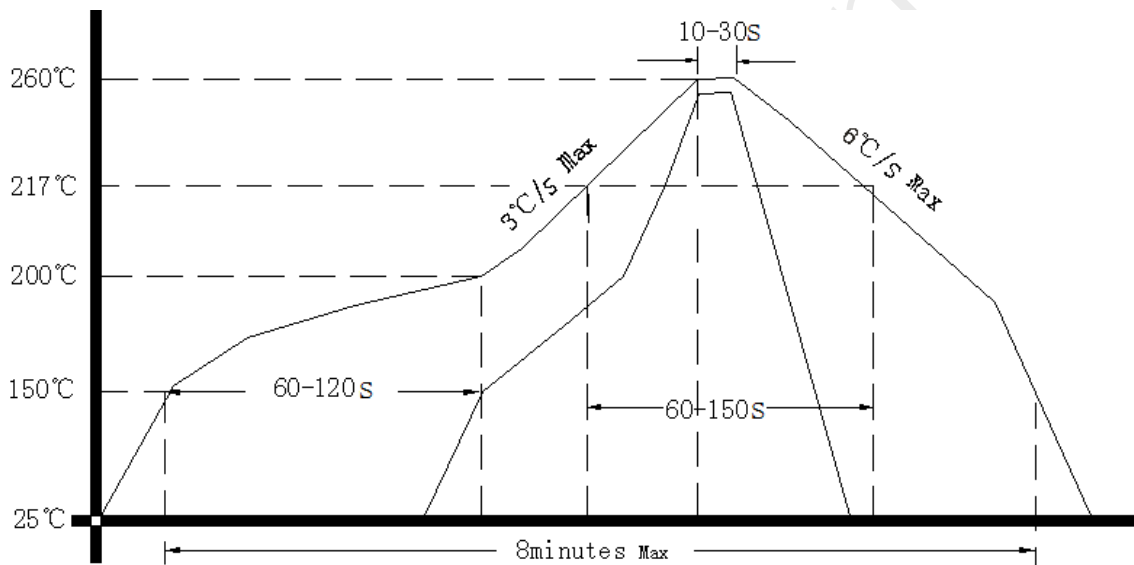

### 5. Package: Tape & Reel (mm)

