

Travelling Merchant: \_\_\_\_\_

# DATASHEET

Standard:           **O77A-M329-10.00MHZ**          

P/N: \_\_\_\_\_

Plot			The Label
Drew	Audited	Approved	Stamp, please! Thanks!
Date: 2013.08.30			

## Guangdong Dapu Telecom Technology Co.,Ltd

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888    FAX: 0086-0769-81800098



**Table of amendment**

Version	Revision contents	Prepared by	Revised date
1.0	The first issued	<i>Amway</i>	2012.09.20
1.1	“Frequency Tuning Range” changed	<i>Amway</i>	2012.09.28
1.2	“EEPROM” added	<i>Amway</i>	2013.06.08
1.3	“phase noise” changed	<i>Amway</i>	2013.06.08
1.5	“LABEL OR MARKING” added “Output Waveform” and “Short-Term Stability: Allan Variance” and “Current Consumption” and “8K I2C SERIAL EEPROM” changed	<i>Amway</i>	2013.06.21
1.6	“Inventory record in EEPROM- Comcode” changed	<i>Amway</i>	2013.08.09
1.7	“Frequency Tolerance vs. Operating Temperature Range- Test Condition” changed	<i>Amway</i>	2013.08.30



## 1. Electrical Parameters

MODEL: O77A-M329-10.00MHz						
Item	Description	Parameters			Unit	Test Condition
		Min.	Typ.	Max.		
Output	Frequency	10.00			MHz	
	Output Waveform	LVTTL				
	Output Low Voltage			0.8	V	$V_{cc}=5.0V, O_{load}=15pF$
	Output High Voltage	2.4			V	$V_{cc}=5.0V, O_{load}=15pF$
	Duty Cycle	45	50	55	%	@50%
	Rise / Fall Time (10%~90%)		2	3	ns	@25°C
	Load	15			pF	
	5MHz sub-harmonic peak			-37	dBc	
	Start up time			2	s	
Frequency Stabilities	Frequency Tolerance vs. Operating Temperature Range			0.2	$\times 10^{-9}$	$T_A$ varied from -10°C to 85°C, $f-T=(f_{max}-f_{min})/2f_0, V_{cc}=5.0V, O_{load}=15pF,$ temperature variable speed less than 2°C per minute.
				0.12	$\times 10^{-9}$	$\Delta T^\circ C < 15^\circ C$ within range -10 °C to 1 °C $V_{cc}=5.0V, O_{load}=15pF,$ temperature variable speed less than 1°C per minute.
				0.06	$\times 10^{-9}$	$\Delta T^\circ C < 15^\circ C$ within range 1 °C to 70 °C $V_{cc}=5.0V, O_{load}=15pF,$ temperature variable speed less than 1°C per minute.
				0.08	$\times 10^{-9}$	$\Delta T^\circ C < 15^\circ C$ within range 70 °C to 85 °C $V_{cc}=5.0V, O_{load}=15pF,$ temperature variable speed less than 1°C per minute.
	Warm-up stability	-0.015		+0.015	$\times 10^{-6}$	$T_A=25^\circ C,$ within 30 days power off, After 12 minutes of warm-up with reference to 24 hours value
	Flywheel Time			24	hours	
	Time shift during Flywheel			10	us	Respect to PRC and $\Delta T_{Amb}=15^\circ C$ within operating range
	Frequency Transient During Thermal Shock (up to 3 minutes duration)	-2		+2	$\times 10^{-9}$	Ramp rate : 5C/min up to 3 minutes duration, within entire operating temperature range.




	Initial Frequency Tolerance	-0.05		+0.05	$\times 10^{-6}$	Measurement referenced to frequency observed with $T_A=25^\circ\text{C}$ , $V_{cc}=5.0\text{V}$ , DAC=0x7FFF, and after 12 minutes of operation, within 30 days after ex-works	
	Frequency Tolerance vs. Supply Voltage	-0.04		+0.04	$\times 10^{-9}$	measurement referenced to frequency observed $T_A=25^\circ\text{C}$ , $V_{cc}$ varied from 4.75V to 5.25V, and $O_{Load}=15\text{pF}$ .	
	Frequency Tolerance vs. Load	-0.04		+0.04	$\times 10^{-9}$	5% load change measurement referenced to frequency observed with $T_A=25^\circ\text{C}$ , $V_{cc}=5.0\text{V}$ , and $O_{Load}=15\text{pF}$ .	
	Short-Term Stability: Allan Variance				0.025	$\times 10^{-9}$	Temperature stability, no EMI/EMC or other interference, test after power for 1 hour ref. to $25^\circ\text{C}$ ; 1s, using PN9000 equipment.
					0.01	$\times 10^{-9}$	Temperature stability, no EMI/EMC or other interference, test after power for 1 hour ref. to $25^\circ\text{C}$ ; 10s, using PN9000 equipment.
					0.01	$\times 10^{-9}$	Temperature stability, no EMI/EMC or other interference, test after power for 1 hour ref. to $25^\circ\text{C}$ ; 100s, using PN9000 equipment.
	Aging Tolerance 8 hours	-0.48		+0.48	$\times 10^{-9}$	$V_{cc}$ , $T_A$ constant measurement referenced to frequency observed with $T_A=25^\circ\text{C}$ , $V_{cc}=5.0\text{V}$ , and after 16 hours of operation, within 30 days power off	
	Aging Tolerance 16 hours	-0.18		+0.18	$\times 10^{-9}$	$V_{cc}$ , $T_A$ constant measurement referenced to frequency observed with $T_A=25^\circ\text{C}$ , $V_{cc}=5.0\text{V}$ , and after 60 hours of operation, within 30 days power off	
	Aging Tolerance 24 hours	-0.08		+0.08	$\times 10^{-9}$	$V_{cc}$ , $T_A$ constant measurement referenced to frequency observed with $T_A=25^\circ\text{C}$ , $V_{cc}=5.0\text{V}$ , and after 7 days of operation, within 30 days power off	
Aging Tolerance 1 Year	-0.02		+0.02	$\times 10^{-6}$	$V_{cc}$ , $T_A$ constant measurement referenced to frequency observed with $T_A=25^\circ\text{C}$ , $V_{cc}=5.0\text{V}$ , and after 30 days of operation.		
Overall Stability	-0.3		+0.3	$\times 10^{-6}$	Inclusive of the following: operating temperature $-10^\circ\text{C}$ to $85^\circ\text{C}$ $5.0\text{V} \pm 5\%$ $15\text{pF}$ load $\pm 5\%$ 10 years aging reference to nominal frequency		
Power Supply	Supply Voltage	4.75	5.0	5.25	V		
	Current Consumption			600	mA	@ $25^\circ\text{C}$	




	Warm-up completion time			12	min	T <sub>A</sub> =25°C, Warm-up completion bit 0 to 1 transition.
	Warm up current			1200	mA	
	Ripple noise on power supply			100	mV	Peak to peak
DAC Control Characteristics	Frequency Tuning Range	-0.3			$\times 10^{-6}$	DAC=0x0400. measurement referenced to DAC=0x7FFF
		-0.05		+0.05	$\times 10^{-6}$	DAC=0x7FFF. measurement referenced to Exactly 10.00MHz
				+0.3	$\times 10^{-6}$	DAC=0xFC00. measurement referenced to DAC=0x7FFF
	Linearity			10	%	
	Slope	Positive				
Phase Noise	Phase Noise		-100	-70	dBc/Hz	1Hz
			-128	-90		10Hz
			-140	-110		100Hz
			-148	-130		1KHz
			-152	-130		10KHz
			-152	-130		100KHz
			-155	-130		1MHz
Environmental Conditions	Operable Temperature	-40		+85	°C	
	Storage Temperature	-55		+105	°C	
	ESD Level	Human Body Model, class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010.				
		Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010.				
	Moisture Sensitivity Level	Not humidity sensitive.				
	Vibration	Test Condition: 0.75mm ;acceleration:10g;10Hz~500Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X ,Y , Z), IEC 68-2-06 Test Fc.				
Shock	50g; 11ms; half sine wave (3 times for each 3 directions X ,Y , Z ),IEC 68-2-27 Test Ea/Severity 50A.					




## 2. Mechanical Structure(mm)

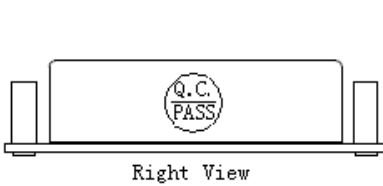

Right View

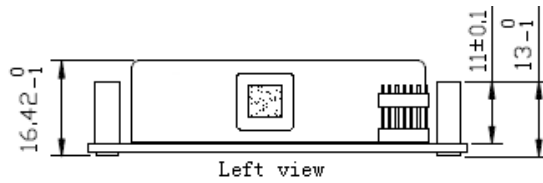



Left view

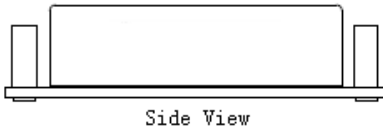

Side View

### PIN FUNCTION

PIN	FUNCTION
1	I2C_SCL
2	I2C_SDA
3	VCC
4	VCC
5	VCC
6	VCC
7	Presence
8	Ready (Warm-up Complete=Logic high)
9	GND
10	GND
11	10MHz output
12	GND
13	GND
14	GND

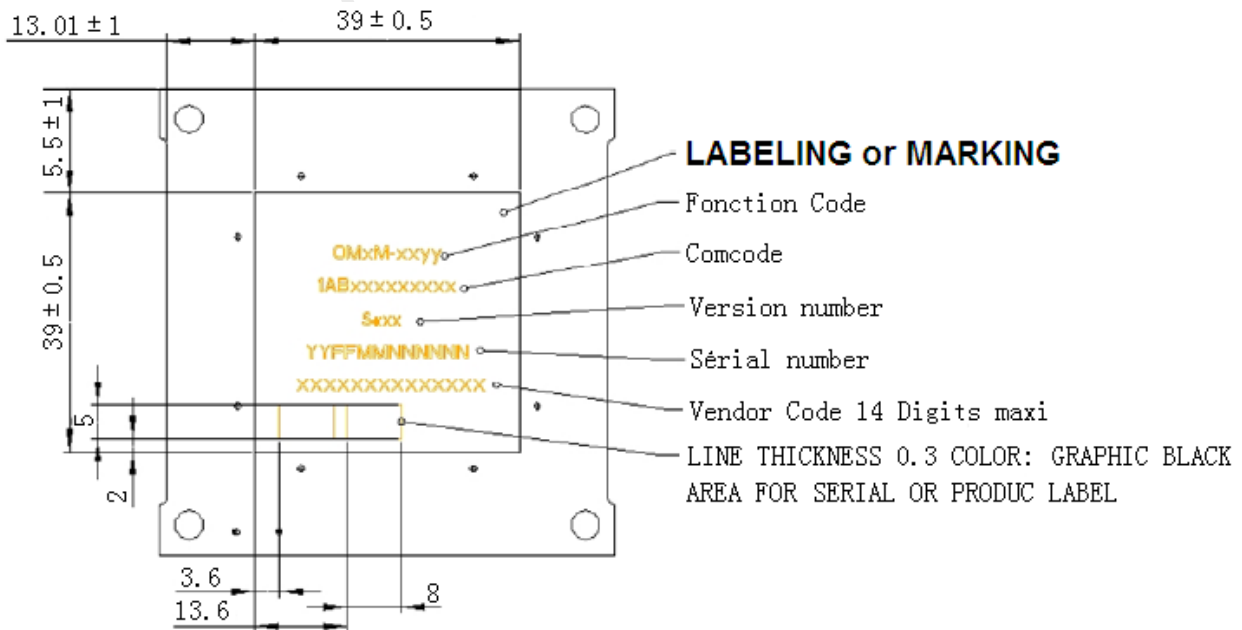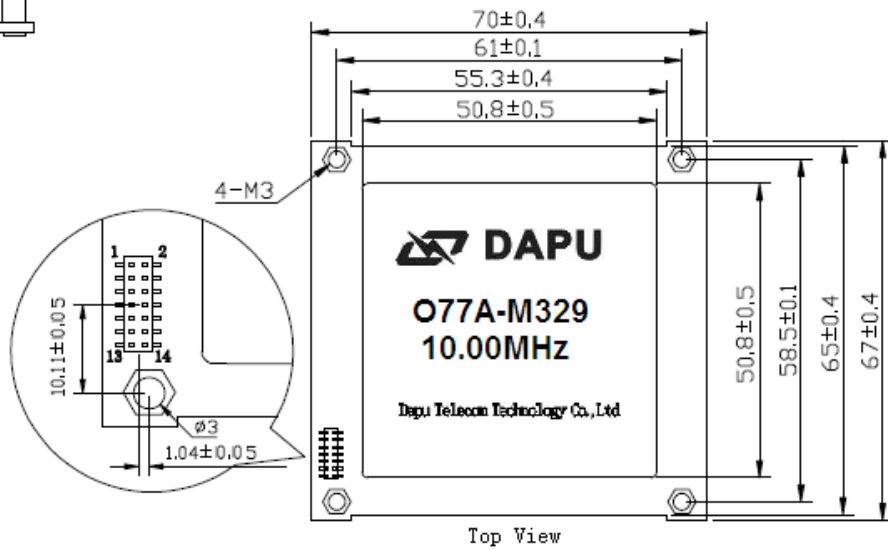

Note: Referential Weight 65g



#### LABEL OR MARKING NOTES:

- The label marking shall agree with information stored in the OMxM memory at the time of delivery.
- Graphic shown is a visual representation only. Do not use to make an art master.
- Label shall be 0.25mm thick polycarbonate/polyester. Text shall be rear printed black on Lucent Central Office White per OS-11150 background, backed with 3M 468 permanent acrylic adhesive or equivalent.  
Finish shall be matte over clear. Approved equivalents are allowed.
- Label shall meet UL 969 requirements. Material must be of UL recognized component plastic. Vendor must be UL approved.
- A certification sheet verifying the vendors UL approval for this material shall be provided by the vendor with each package/container or verification may be part of the adhesive release liner
- All dimensions millimeters Unless otherwise ta listed, all tolerances are  $\pm 0.38\text{mm}$ .
- All corners shall have a 1.52mm radius.
- Line 1 shall be 12 point Helvetica Bold Condensed font with text 'OMQM-08' for List 1, 'OMQM-24' for List 2 and 'OMAMAT' for List 3 , 'OMQM-08PB' for L4 and 'OMQM-24PB' for L5
- Line 2 shall be 10 point Helvetica Light Condensed font with a 9 characters per line maximum consisting of the Alcatel-Lucent Comcode (1AB.....).
- Line 3 shall be 10 point Helvetica Light Condensed font with a 6 characters per line maximum consisting of the Version Number.
- Line 4 shall be 8 point Helvetica Light Condensed font with a 12 characters per line maximum consisting of the Vendor Serial Number.
- The Vendor name shall be black in color.(DAPU)

### 3. I<sup>2</sup>C Devices Address

#### 3.1. DIGITAL-TO-ANALOG CONVERTER,VOLTAGE OUTPUT

Device name : DAC8571

Device supplier : TI

Device address : 1001100

#### 3.2.1 8K I2C SERIAL EEPROM

Device name : AT24C08C

Device supplier : Atmel

Device address : 1010100~1010111



### 3.2.2 EEPROM for inventory and data storage

Address	Total number of bytes	Usage
0x000 – 0x05F	96	Inventory record
0x060 – 0x07F	32	Reserved future inventory format extension
0x080 – 0x1FF	384	Reserved for temperature correction record
0x0200 – 0x2FF	256	Reserved for aging correction record
0x0300 – 0x3FF	256	Reserved for future use

### 3.2.3 Inventory record in EEPROM

The inventory record inside the EEPROM will be in the following format. This is a 96 byte format.

Identification Fields	D#	# of bytes	Values (in Hex)
Header	D0	1	80
Function Code: OM-24 for 24 hour flywheel	D1-D11	11	5 ASCII bytes to show “OM-24” See note 1 for unused position filling
Serial Number: “Y <sub>1</sub> Y <sub>0</sub> F <sub>1</sub> F <sub>0</sub> M <sub>1</sub> M <sub>0</sub> N <sub>5</sub> N <sub>4</sub> N <sub>3</sub> N <sub>2</sub> N <sub>1</sub> N <sub>0</sub> ” Y <sub>1</sub> Y <sub>0</sub> =year,F <sub>1</sub> F <sub>0</sub> =factory code, M <sub>1</sub> M <sub>0</sub> =month N <sub>5</sub> N <sub>4</sub> N <sub>3</sub> N <sub>2</sub> N <sub>1</sub> N <sub>0</sub> =unit number	D12-D24	13	Variable Note 1, 4
Doc Number	D25-D36	12	Note 1
Doc Issue No. "I <sub>1</sub> .I <sub>0</sub> " (e.g. 1.2)	D37-D41	5	Note 1
Version “SS <sub>2</sub> :S <sub>1</sub> S <sub>0</sub> ” (eg. S4:00)	D42-D47	6	Note 1,4
Comcode : 1ABxxxxxxxxx numbering scheme (12-digit)	D48-D62	15	12 ASCII bytes to show “1AB397790002” See note 1 for unused position filling
Vendor Specific Information (If applicable)	D63-D73	11	Note 1
Specific information per function code	D74-D80	7	Note 1, 3
Vendor Code (Vendor’s company name in capital letter)	D81-D94	14	“DAPU” See note 1 for unused position filling
End of File	D95	1	04

#### Notes

1. The I/D values are in ASCII representation except where explicitly noted. Unused positions in a field are filled with the ASCII space character (20h). A null character (00h) is in the last byte of each field, except header and End-of-file. The end-of-file ASCII character (04h) indicates end of inventory data.





2. The variable values will be provided by or agreed to by SCN contact for use here.
3. This field is reserved for future use
4. F1F0 is defined by vendor to identify different factory of the vendor to manufacture the part.  
SS2:S1S0 is defined by vendor to differentiate different version of the part.
5. More detailed information see the datasheet provide by the supplier

### 3.3. DIGITAL THERMOMETER AND THERMOSTAT


Device name: LM75

Device supplier: National

Device address: 1001000


Note: More detailed information see the datasheet provide by the supplier.

## 4. Test Circuit

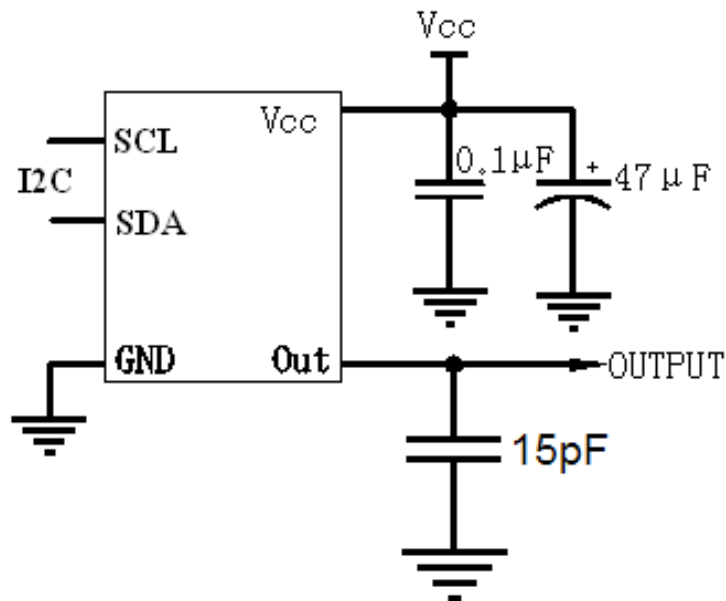



### 5. Reflow Soldering Curve (RoHS)

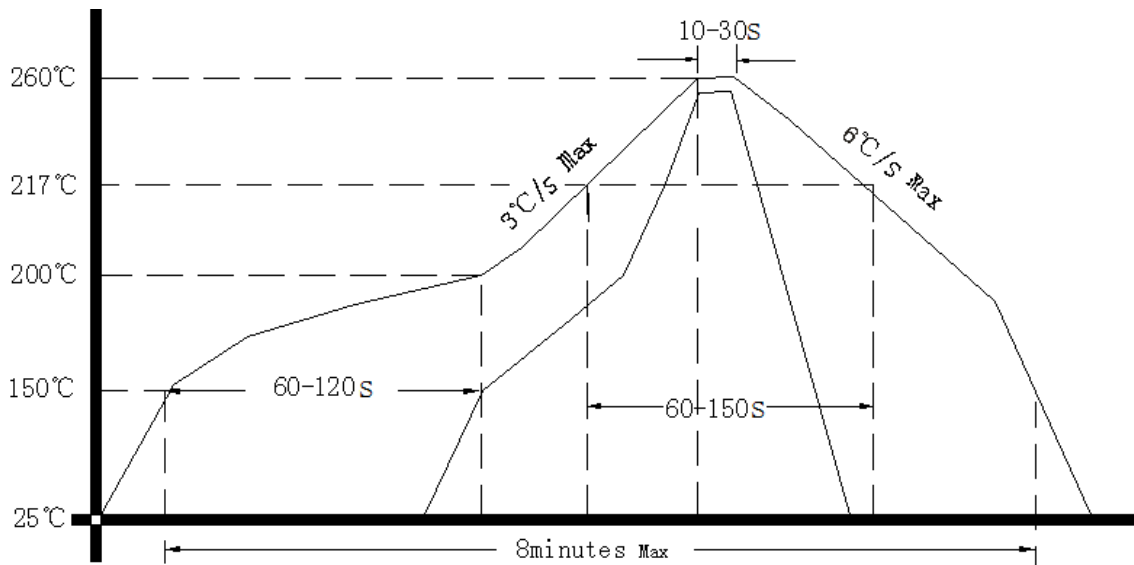

### 6. Package(mm)

