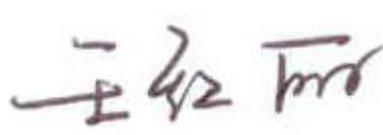


客户宝号: _____

规格书

品名规格: T11A-APFFCDN-8.192MHz

出 图			确 认 印
制 图	审 核	核 准	 2011/03/07 请予确认签章 谢谢!
 吴双霞	 王嘉嘉	 刘博	
日期: 年 月 日			

东莞市大普通信技术有限公司

东莞市松山湖科技园新城大道1号

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



产品技术参数指标

型号: **T11A-APFFCDN-8.192MHz**

1. 输出

- 1.1. 频率 8.192MHz
- 1.2. 波形 HCMOS
Voh \geq 2.8V, Vol \leq 0.4V
- 1.3. 占空比 45%~55% @50%
- 1.4. 上升/下降时间 \leq 5ns

2. 频率稳定度

- 2.1. 温度特性 $\leq \pm 5.0 \times 10^{-7}$ @-10°C ~ +50°C @25 °C
- 2.2. 频率稳定度 $\leq \pm 1.0 \times 10^{-6}$ (25 °C 时出厂时校正)
- 2.3. 老化率 $\leq \pm 2.0 \times 10^{-8}$ /日
 $\leq \pm 1.0 \times 10^{-6}$ /第一年

3. 电压

- 3.1. 工作电压 3.3VDC \pm 5%

4. 电流

- 4.1. 工作电流 $< 10\text{mA}$

5. 电压控制特性

- 5.1. 电压变化范围 0.5~2.5V (中心电压 1.5VDC)
- 5.2. 频率牵引范围 $\geq \pm 10\text{ppm}$
- 5.3. 斜率 正斜率
- 5.4. 线性 $\leq \pm 10\%$


6. 环境特性

- 6.1. 工作温度 -10°C ~ +50°C
- 6.2. 存储温度 -40°C ~ +85°C
- 6.3. 保存 从包装盒取出之后, 建议保存条件为: 温度30°C, 湿度小于70%



7. 机械结构:


7.1. 外形尺寸及管脚定义

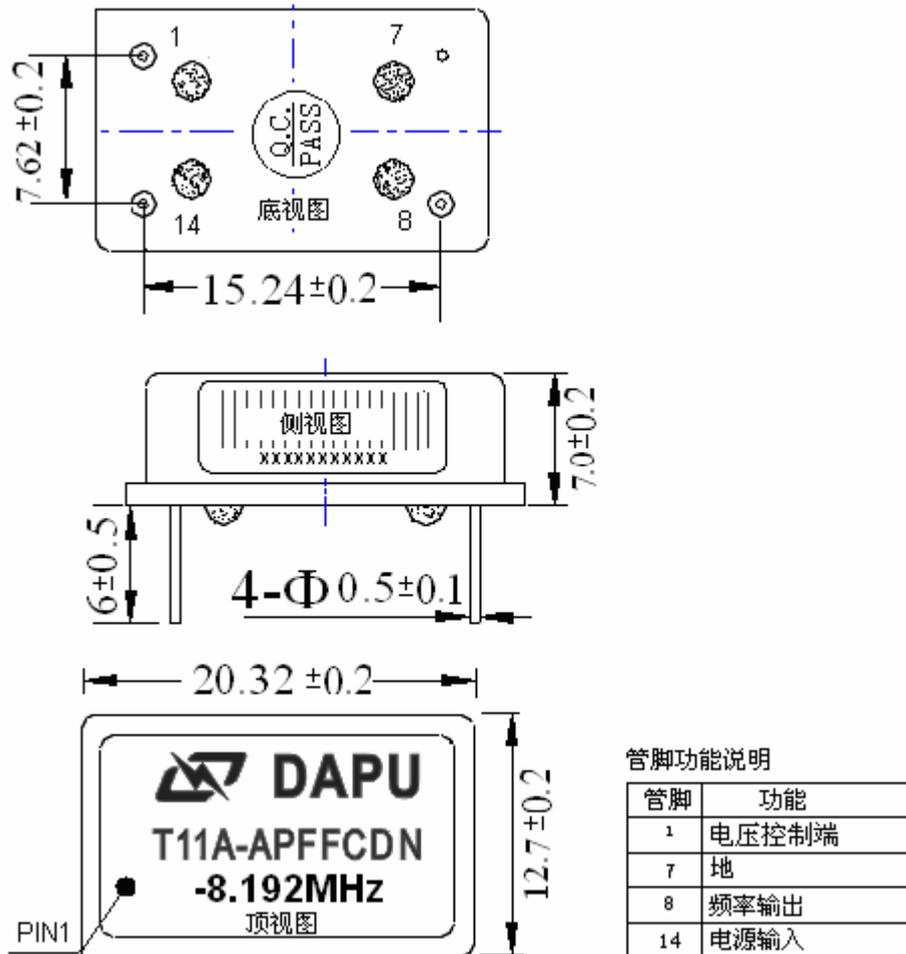

备注：底视图为针脚正对着观察者

单位：mm


8. 电路图

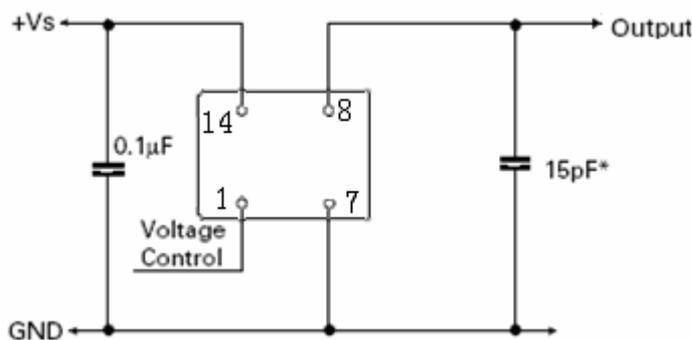



9. 波峰焊曲线图

Solderprofile:

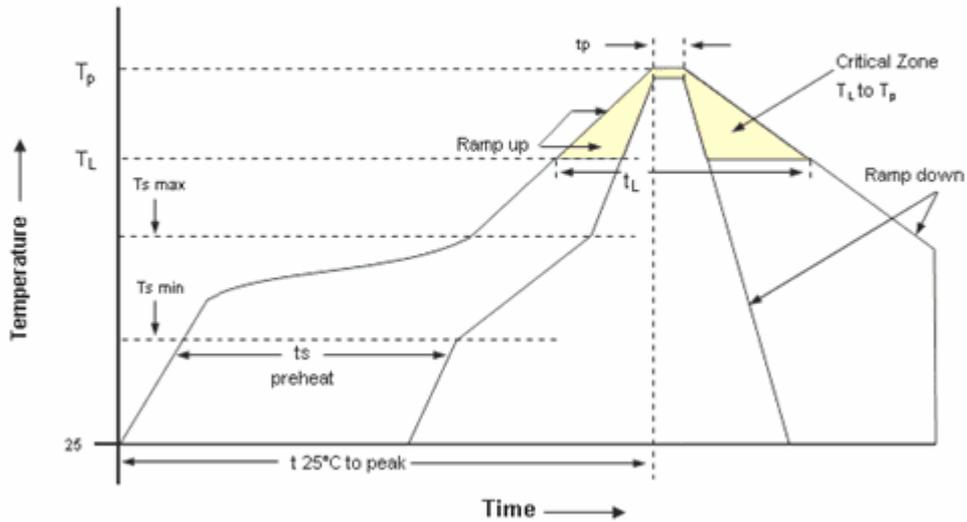

Profile Feature	Pb-Free Assembly	Profile Feature	Pb-Free Assembly
Average ramp-up rate (T _L to T _p)	3°C/second max.	Time 25°C to Peak Temperature	8 minutes max.
Preheat - Temperature Min T _{Smin}) - Temperature Min T _{Smax}) - Time (min to max) (t _s)	150°C 200°C 60-180 seconds	Time maintainted above - Temperature (T _L) - Time (t _L)	217°C 60-150 seconds
T _{Smax} to T _L - Ramp-up Rate	3°C/second max.		
Time maintainted above - Temperature (T _L) - Time (t _L)	217°C 60-150 seconds	Time within 5°C of actual Peak Temperature (t _p)	20-40 seconds
Peak Temperature (T _p)	max 260°C	Ramp-down Rate	6°C/second max.

Note: All temperatures refer to topside of the package, measured on the package body surface.