

Travelling Merchant: _____

DATASHEET

Standard: **O23L-T426-100.00MHz** P/N: **201000BDLS33**

Plot			The Label
Drew	Audited	Approved	
Date: 2014.10.16			
			Stamp, please! Thanks!

Guangdong Dapu Telecom Technology Co.,Ltd

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



1. Electrical Parameters


MODEL: O23L-T426-100.00MHz						
Item	Description	Parameters			Unit	Test Condition
		Min.	Typ.	Max.		
Output	Frequency	100.00			MHz	
	Output Waveform	Sine wave				
	Level	7			dBm	
	Load	50			Ω	
	Harmonics Suppression			-30	dBc	
	Spurious Suppression			-70	dBc	
Frequency Stabilities	Frequency Tolerance vs. Operating Temperature Range	-0.05		+0.05	$\times 10^{-6}$	T_A varied from -20°C to 70°C , measurement referenced to frequency observed with $f_{\text{ref}}=(f_{\text{max}}+f_{\text{min}})/2$, $V_{\text{cc}}=5.0\text{V}$, $O_{\text{load}}=50\Omega$, temperature variable speed less than 2°C per minute.
	Initial Frequency Tolerance	-0.5		+0.5	$\times 10^{-6}$	Measurement referenced to frequency observed with $T_A=25^{\circ}\text{C} \pm 2^{\circ}\text{C}$, $V_{\text{cc}}=5.0\text{V}$ and after 15 minutes of operation, within 30 days after ex-works.
	Aging Tolerance per day	-5		+5	$\times 10^{-9}$	$V_{\text{cc}}, V_{\text{c}}, T_A$ constant Measurement referenced to frequency observed with $T_A=25^{\circ}\text{C}$,
	Aging Tolerance 1 Year	-0.3		+0.3	$\times 10^{-6}$	$V_{\text{cc}}=5.0\text{V}$, $O_{\text{load}}=50\Omega$ and after 30 days of operation.
Power Supply	Supply Voltage	4.75	5.0	5.25	V	
	Current Consumption			250	mA	@ $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$
	Current Consumption during warm up			600	mA	@ $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$
Frequency adjust	Frequency Adjust Range	± 0.5			$\times 10^{-6}$	0~5.0V, relative to the nominal frequency.
Phase Noise	Phase Noise			-130	dBc/Hz	100Hz
				-160		1KHz
				-165		10KHz
				-165		100KHz




Environmental Conditions	Operable Temperature	-20		+70	°C	
	Storage Temperature	-55		+85	°C	
	ESD Level	Human Body Model, class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010.				
		Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010.				
	Moisture Sensitivity Level	Not humidity sensitive.				
	Vibration	Test Condition: 0.75mm ;acceleration:10g;10Hz~500Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X ,Y , Z), IEC 68-2-06 Test Fc.				
Shock	50g; 11ms; half sine wave (3 times for each 3 directions X ,Y, Z),IEC 68-2-27 Test Ea/Severity 50A.					



2. Mechanical Structure (mm)

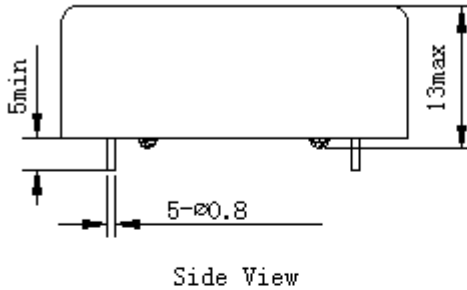


Bottom View

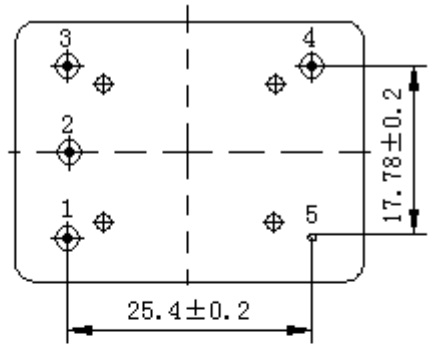

PIN FUNCTION


PIN	NOTATION	FUNCTION
1	VC	Control Voltage
2	Vref/NC	Reference Voltage/Not Connect
3	VCC	Supply Voltage
4	OUTPUT	RF Output
5	GND	GND

Top View

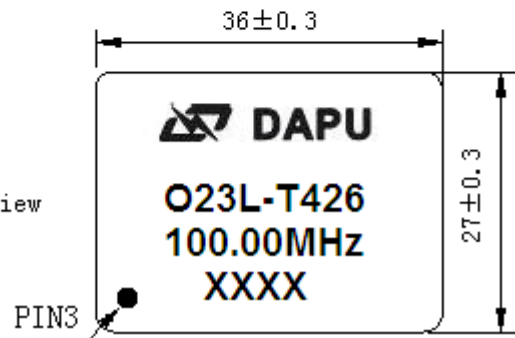

- Note1:** The first two xx representative: week
After two xx representative: year
- Note2:** Referential Weight 30.0g
- Note3:** NC is not connect

3. Test Circuit

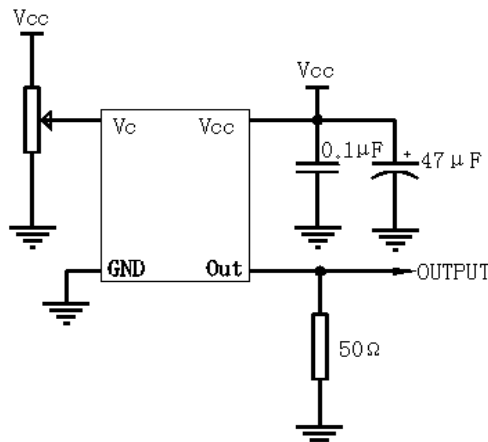

Note: Has a built-in bias voltage in voltage controlled .If needn't calibrate the OCXO's frequency, please don't connect the reference voltage and the voltage control pin.



4. Reflow Soldering Curve (RoHS)



5. Package(mm)

