



Table of amendment

Version	Revision contents	Prepared by	Revised date
1.0	The first issued	<i>Amway</i>	2014.08.29
1.1	“Full Package Storage” added “Output Low/ High Voltage”, “Nominal Frequency Tolerance- Test Condition”, “Frequency Tolerance vs. Supply Voltage”, “Frequency Tolerance vs. Load”, “Frequency Slope”, “Overall Stability-Test Condition” and “Storage Temperature” changed	<i>Amway</i>	2015.01.08
1.2	Modified the 1 st page “Phase Noise” and “Mechanical Structure” changed	<i>Amway</i>	2015.05.05
1.3	“Frequency Tolerance vs. Operating Temperature Range”, “Frequency Tolerance vs. Load-Test Condition”, “Phase Noise” and “Pin Function” changed	<i>Amway</i>	2015.06.16
1.4	“Moisture Sensitivity Level” and “Mechanical Structure” changed	<i>Amway</i>	2015.07.10
1.5	“Output Low/ High Voltage”, “Jitter- Test Condition”, “Power Supply- Supply Voltage” and “Phase Noise” changed	<i>Amway</i>	2015.07.14



1. Electrical Parameters


MODEL: T53-1803-19.20MHZ						
Item	Description	Parameters			Unit	Test Condition
		Min.	Typ.	Max.		
Output	Frequency	19.20			MHz	
	Output Waveform	HCMOS				
	Output Low Voltage			0.347	V	$V_{cc}=3.3V, O_{load}=15\text{ pF}$
	Output High Voltage	2.7			V	$V_{cc}=3.3V, O_{load}=15\text{ pF}$
	Duty Cycle	45	50	55	%	@50%
	Rise / Fall Time (10%~90%)			5	ns	@25°C
	Load	15			pF	
	Start up Time		5	10	ms	90% amplitude
	Jitter		0.6	0.8	ps	12KHz~5MHz
Frequency Stabilities	Frequency Tolerance vs. Operating Temperature Range	-0.15		+0.15	$\times 10^{-6}$	T_A varied from -40°C to 85°C, measurement referenced to frequency observed with $T_A=25^\circ\text{C}, V_{cc}=3.3V, O_{load}=15\text{ pF}$, temperature variable speed less than 2°C per minute.
				0.2	$\times 10^{-6}$	T_A varied from -40°C to 85°C, $f_{pk-pk}=(f_{max}-f_{min})/f_1$, f_1 measurement referenced to frequency observed with $T_A=25^\circ\text{C}, V_{cc}=3.3V, O_{load}=15\text{ pF}$, temperature variable speed less than 2°C per minute.
	Nominal Frequency Tolerance	-2		+2	$\times 10^{-6}$	Measurement referenced to exactly 19.20MHz, with $T_A=25^\circ\text{C}, V_{cc}=3.3V$ within 30 days after ex-works.
	Frequency Tolerance vs. Supply Voltage	-0.05		+0.05	$\times 10^{-6}$	measurement referenced to frequency observed $T_A=25^\circ\text{C}, V_{cc}$ varied from 3.13V to 3.47V and $O_{Load}=15\text{ pF}$.
	Frequency Tolerance vs. Load	-0.05		+0.05	$\times 10^{-6}$	10% load change measurement referenced to frequency observed with $T_A=25^\circ\text{C}, V_{cc}=3.3V$ and $O_{Load}=15\text{ pF}$.
	Frequency Slope	-0.02		+0.02	$\times 10^{-6}/^\circ\text{C}$	Temperature variable speed 2°C per minute, test interval:1°C.
	Aging Tolerance Per Day	-0.02		+0.02	$\times 10^{-6}$	$T_A=25^\circ\text{C}, V_{cc}=3.3V$ and after 1h of operation.
Aging Tolerance 1 Year	-1		+1	$\times 10^{-6}$		



	Overall Stability	-4.6		+4.6	$\times 10^{-6}$	Inclusive of the following with $T_A=25^\circ\text{C}$: - Frequency Tolerance vs. Operating Temperature Range - 3.3V $\pm 5\%$ - 15pF load $\pm 5\%$ - 20 years aging reference to nominal frequency.
Power Supply	Operating Current			10	mA	@25°C, $V_{cc}=3.3\text{V}$, $O_{Load}=15\text{ pF}$.
	Supply Voltage	3.13	3.3	3.47	V	
Phase Noise	Phase Noise @25°C		-121	-111	dBc/Hz	100Hz
			-140	-132		1KHz
			-152	-142		10KHz
			-155	-145		100KHz
			-155	-148		1MHz
			-155	-148		5MHz
Environmental Conditions	Operable Temperature	-40		+85	°C	
	Storage Temperature	-55		+125	°C	
	ESD Level	Human Body Model, class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010.				
		Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010.				
	Moisture Sensitivity Level	Level 3.				
	Vibration	Test Condition: 0.75mm ;acceleration:10g;10Hz~2000Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X , Y , Z).IEC 68-2-06 Test Fc.				
Shock	100g; 6ms; half sine wave (3 times for each 3 directions X , Y , Z),IEC 68-2-27 Test Ea/Severity 50A.					
Full Package Storage	Relative humidity (%)	20%~70%				
	Temperature (°C)	-10~35°C				




2. Mechanical Structure(mm)

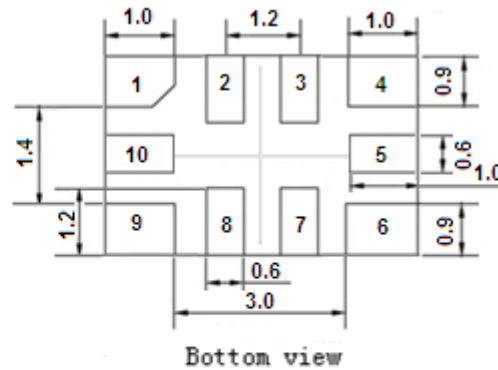

PIN FUNCTION

PIN	NOTATION	FUNCTION
1,5,7,10	NC	Not Connect
2,3,8	Inter Com	Inter Com
4	GND	GND
6	OUTPUT	RF Output
9	VCC	Supply Voltage

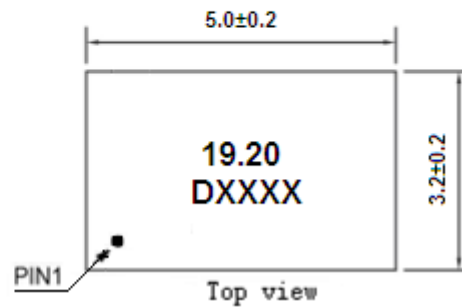

Note1: Tolerance $\pm 0.10\text{mm}$ without mark

Note2: The D representative: DAPU


The first two xx representative: week

After two xx representative: year

Note3: Referential Weight 0.05g

Note4: NC is not connect

3. Test Circuit

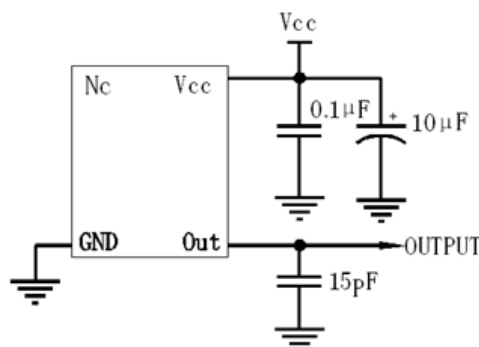



4. Reflow Soldering Curve (RoHS)



5. Package: Tape & Reel (mm)

