

Customer Code : _____

DATASHEET

DAPU P/N: 022S-N319-20.00MHz-C

Customer P/N: _____

| DAPU | | | Customer Approval |
|------------------|---------|----------|------------------------|
| Drew | Audited | Approved | Stamp, please! Thanks! |
| | | | |
| Date: 2016.03.14 | | | |

Guangdong Dapu Telecom Technology Co.,Ltd

Bldg 16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



1、Electrical Parameters


| MODEL: O22S-N319-20.00MHZ-C | | | | | | | |
|-----------------------------|---|------------|------|-------|------------------|---|---|
| Item | Description | Parameters | | | Unit | Test Condition | |
| | | Min. | Typ. | Max. | | | |
| Output | Frequency | 20.00 | | | MHz | | |
| | Output Waveform | HCMOS | | | | | |
| | Output Low Voltage | | | 0.4 | V | $V_{cc}=3.3V, O_{load}=15pF$ | |
| | Output High Voltage | 2.4 | | | V | $V_{cc}=3.3V, O_{load}=15pF$ | |
| | Duty Cycle | 45 | 50 | 55 | % | @50% | |
| | Rise / Fall Time (10%~90%) | | | 10 | ns | | |
| | Load | 15 | | | pF | | |
| Frequency Stabilities | Frequency Tolerance vs. Operating Temperature Range | -0.01 | | +0.01 | $\times 10^{-6}$ | T_A varied from $-40^{\circ}C$ to $85^{\circ}C$, measurement referenced to frequency observed with $f_{ref}=(f_{max}+f_{min})/2, V_{cc}=3.3V, O_{load}=15pF$, temperature variable speed less than $2^{\circ}C$ per minute. | |
| | Initial Frequency Tolerance | -0.1 | | +0.1 | $\times 10^{-6}$ | Measurement referenced to frequency observed with $T_A = 25^{\circ}C, V_{cc}=3.3V$, and after 15 minutes of operation, Within 24 hours after ex-works. | |
| | Frequency Tolerance vs. Supply Voltage | -3 | | +3 | $\times 10^{-9}$ | measurement referenced to frequency observed $T_A=25^{\circ}C, V_{cc}$ varied from 3.13V to 3.47V, and $O_{Load}= 15pF$. | |
| | Frequency Tolerance vs. Load | -3 | | +3 | $\times 10^{-9}$ | 5% load change measurement referenced to frequency observed with $T_A= 25^{\circ}C, V_{cc}=3.3V, O_{Load}= 15pF$. | |
| | Short-Term Stability: Allan Variance | | | | 0.08 | $\times 10^{-9}$ | Temperature stability, no EMI/EMC or other interference, test after power for 1hour ref. to $25^{\circ}C$; 10s, using PN9000 equipment. |
| | | | | | 0.05 | $\times 10^{-9}$ | Temperature stability, no EMI/EMC or other interference, test after power for 1hour ref. to $25^{\circ}C$; 100s, using PN9000 equipment. |
| | Aging Tolerance Per Day | -1 | | +1 | $\times 10^{-9}$ | V_{cc}, T_A constant measurement referenced to frequency observed with $T_A=25^{\circ}C, V_{cc}= 3.3V$, and after 30 days of operation. | |
| | Aging Tolerance 1 Year | -0.1 | | +0.1 | $\times 10^{-6}$ | | |
| | Aging Tolerance 30 Days | -0.03 | | +0.03 | $\times 10^{-6}$ | | |
| | Aging Tolerance 20 Years | -2 | | +2 | $\times 10^{-6}$ | | |



| | | | | | | |
|---|--|---|------|------|------------------|---|
| | Holdover 24hours Drift | -1 | | +1 | $\times 10^{-9}$ | $V_{cc}=3.3V$, temperature change range $\pm 2.8^{\circ}C$, after 30 days of operation. |
| | Overall Stability | -4.6 | | +4.6 | $\times 10^{-6}$ | Inclusive of the following: - operating temperature $-40^{\circ}C$ to $85^{\circ}C$ - $3.3V \pm 5\%$ - 15pF load $\pm 5\%$ - 2 times reflow soldering - 20 years aging reference to nominal frequency |
| Stratum 3E compliant per GR-1244-CORE teleconcordia | | | | | | |
| Power Supply | Supply Voltage | 3.13 | 3.3 | 3.47 | V | |
| | Steady Consumption | | | 400 | mA | @ $25^{\circ}C$ |
| | Warm-Up Time | | | 5 | minutes | @ $25^{\circ}C$ within $\pm 0.1 \times 10^{-6}$ of final frequency with reference after 1 hour on. |
| | Warm up current | | | 900 | mA | |
| Phase Noise | Phase Noise @ $25^{\circ}C$ | | -115 | -105 | dBc/Hz | 10Hz |
| | | | -140 | -130 | | 100Hz |
| | | | -150 | -145 | | 1KHz |
| | | | -155 | -150 | | 10KHz |
| | | | -155 | -150 | | 100KHz |
| Environmental Conditions | Operable Temperature | -40 | | +85 | $^{\circ}C$ | |
| | Storage Temperature | -55 | | +105 | $^{\circ}C$ | |
| | ESD Level | Human Body Model,class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010. | | | | |
| | | Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010. | | | | |
| | Moisture Sensitivity Level | Level 2. | | | | |
| | Vibration | Test Condition: 0.75mm ;acceleration:10g;10Hz~500Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X , Y , Z), IEC 68-2-06 Test Fc. | | | | |
| Shock | 50g; 11ms; half sine wave (3 times for each 3 directions X , Y , Z),IEC 68-2-27 Test Ea/Severity 50A. | | | | | |
| Full Package Storage | Relative humidity (%) | 20%~70% | | | | |
| | Temperature ($^{\circ}C$) | -10~35 $^{\circ}C$ | | | | |




2、Mechanical Structure(mm)

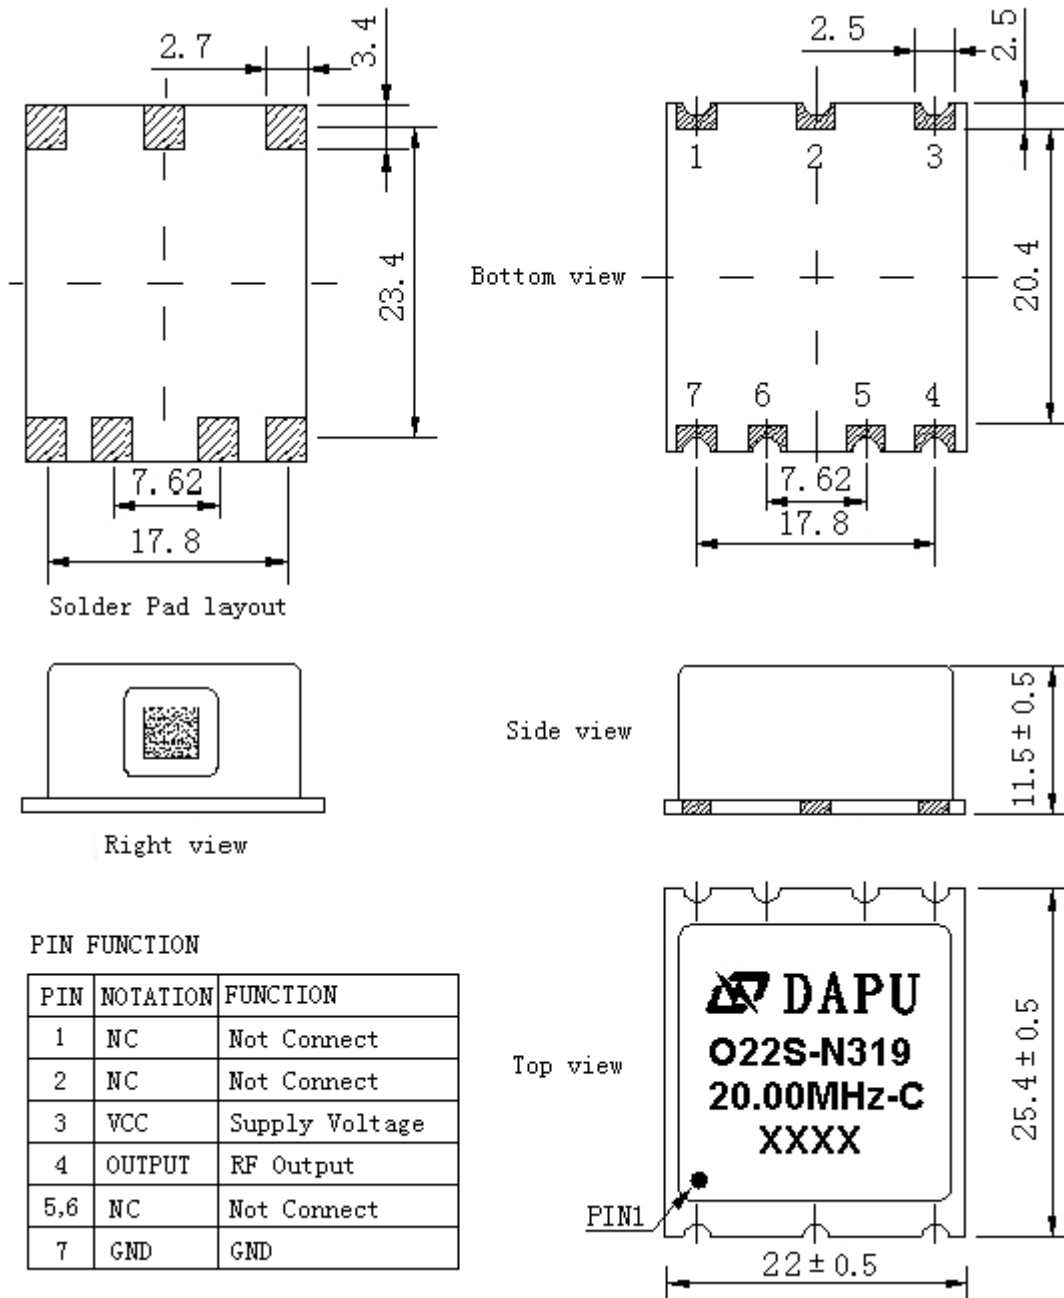


- Note1:** Tolerance $\pm 0.2\text{mm}$ without mark
- Note2:** The first two xx representative: week
After two xx representative: year
- Note3:** Referential Weight 7.8g
- Note4:** NC is not connect



3、 Test Circuit

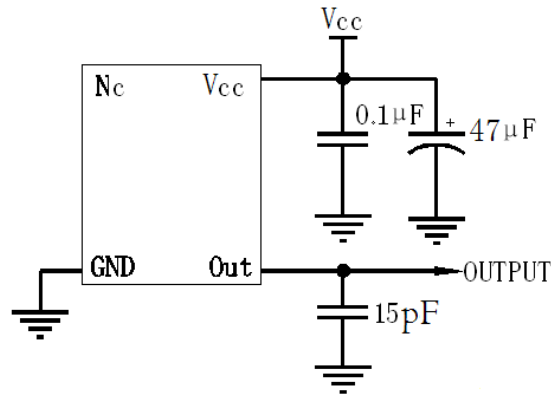

4、 Reflow Soldering Curve (RoHS)

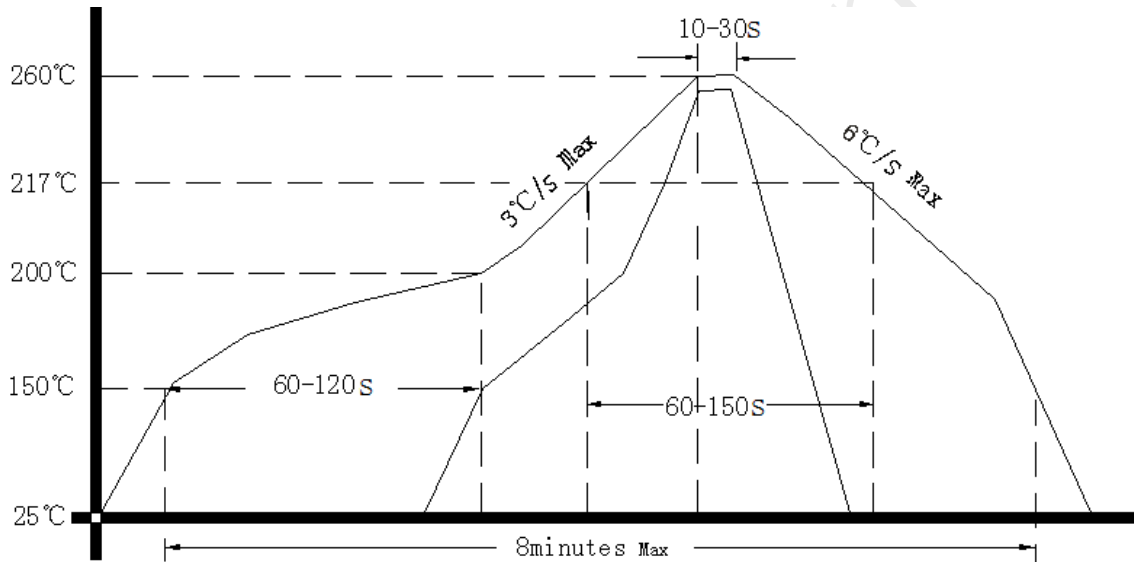

5、 Package (mm)

