

Travelling Merchant: _____

DATASHEET

Standard: **DP6P87040001**

JSX150870001

Plot			The Label
Drew	Audited	Approved	Stamp, please! Thanks!
Date: 2015.03.18			

Guangdong Dapu Telecom Technology Co.,LTD

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098




1、 Electrical Parameters

MODEL: DP6P87040001							
No.	Parameters	SYM.	Electrical Spec.				Notes
			Min.	Typ.	Max.	Units	
1	Nominal Frequency	FL	8.704			MHz	
2	Oscillation Mode	-	Fundamental			-	
3	Load Capacitance	CL	20			pF	
4	Frequency Tolerance	-	-30	-	+30	$\times 10^{-6}$	at 25°C± 3°C
5	Frequency Stability	-	-30	-	+30	$\times 10^{-6}$	Over Operating Temp. Range (Reference 25°C)
6	Operating Temperature	-	-40	~	+85	°C	
7	Storage Temperature Range	-	-55	~	+125	°C	
8	Aging	-	-3	-	+3	$\times 10^{-6}$	1st Year
9	Drive Level	DL	-	-	100	uW	
10	Effective Resistance Rr	Rr	-	-	60	Ω	
11	Shunt Capacitance C0	C0	-	-	7	pF	
12	Insulation Resistance	-	500	-	-	M Ω	at DC 100V
13	ESD Level	Human Body Model,class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010					
		Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010					
14	Moisture Sensitivity Level	Level 2					
15	Vibration	Test Condition: 0.75mm ;acceleration:10g;10Hz~2000Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X ,Y , Z). IEC 68-2-06 Test Fc.					
16	Shock	100g; 6ms; half sine wave (3 times for each 3 directions X ,Y , Z),IEC 68-2-27 Test Ea/Severity 50A.					



2、Mechanical Structure(mm)

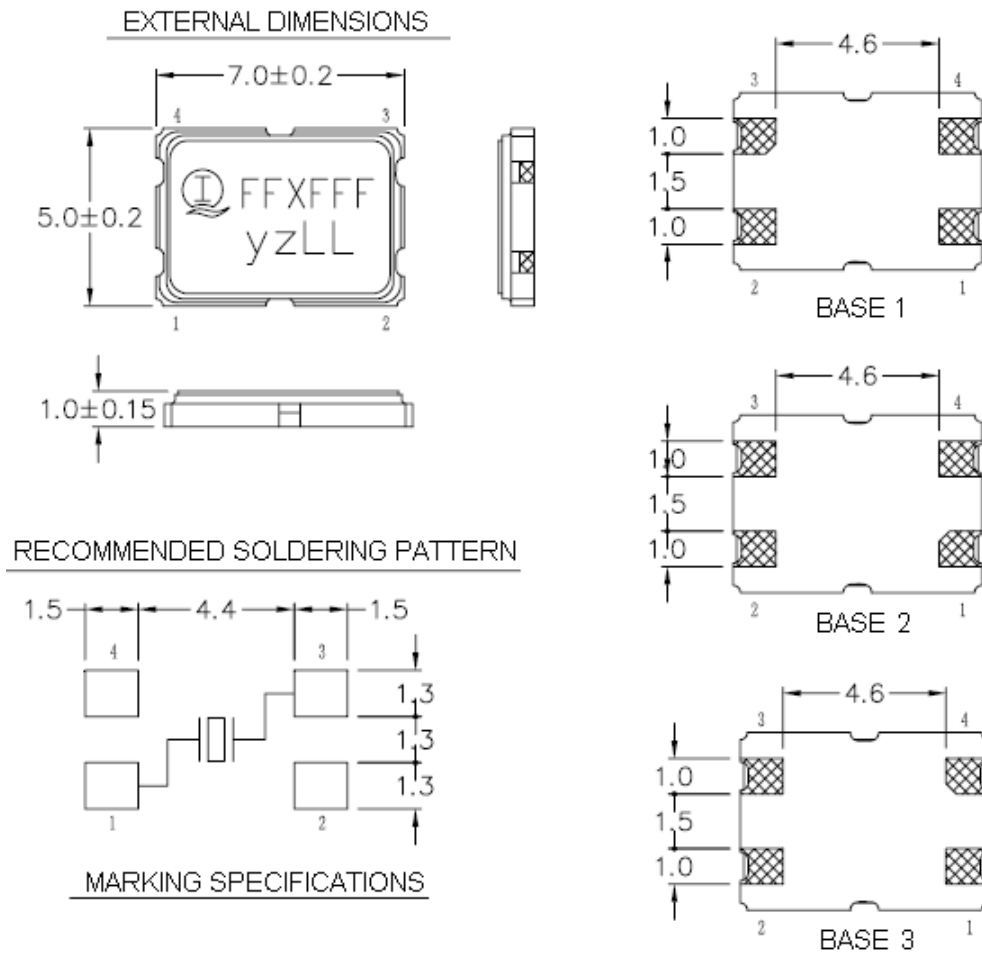

Note1: Tolerance ± 0.2 mm

— COMPANY'S LOGO

FF FFF— REPRESENT FREQUENCY (MHz)

X — REPRESENT PRODUCTION LINE CODE

YZ — REPRESENT MONTH & YEAR CODE RESPECTIVELY

“Y”:

MONTH	Jan	Feb	Mar	Apr.	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
MARK	A	B	C	D	E	F	G	H	J	K	L	M

“Z” CODE IS THE LAST NUMBER OF PRODUCTION YEAR


YEAR	2009	2010	2011	2012	2013
MARK	9	0	1	2	3

FOR INSTANCE:

LL— REPRESENT LOT CODE (AA-ZZ)



3、Reflow Soldering Curve (RoHS)

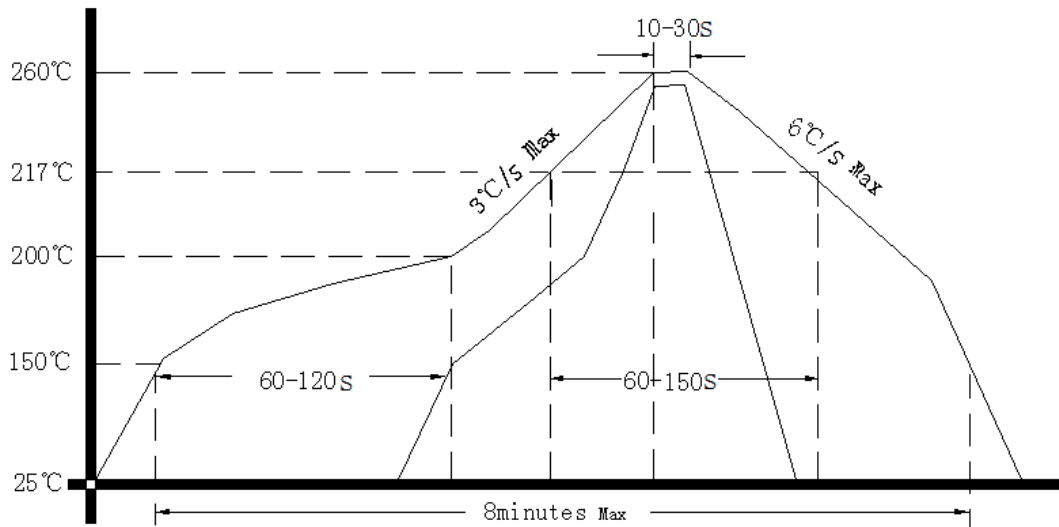

4、Package: Tape & Reel (mm)

