



1. Electrical Parameters


MODEL: T32-1801-20.00MHz						
Item	Description	Parameters			Unit	Test Condition
		Min.	Typ.	Max.		
Output	Frequency	20.00			MHz	
	Output Waveform	Chipped sine-wave				
	Output Waveform	0.8			V	
	Load	10K Ω //10pF				
	Start-up Time			5	ms	
	Spurious Suppression			5	dBc	
	Frequency Tolerance vs. Operating Temperature Range	-0.5		+0.5	$\times 10^{-6}$	T _A varied from -40°C to 85°C, measurement referenced to frequency observed with f _{ref} =(f _{max} +f _{min})/2, V _{cc} =3.3V, O _{load} =10K Ω //10pF, temperature variable speed less than 2°C per minute.
	Initial Frequency Tolerance	-2		+2	$\times 10^{-6}$	Measurement referenced to frequency observed T _A =25°C, sixty minutes, after reflow, V _{cc} =3.3V, O _{Load} =10K Ω //10pF.
	Frequency Slope	-0.25		+0.25	PPM/°C	Temperature variable speed 2°C per minute.
	Frequency Tolerance vs. Supply Voltage	-0.2		+0.2	$\times 10^{-6}$	Measurement referenced to frequency observed T _A =25°C, V _{cc} varied from 3.135V to 3.465V, and O _{Load} =10K Ω //10pF
	Frequency Tolerance vs. Load	-0.2		+0.2	$\times 10^{-6}$	5% load change measurement referenced to frequency observed with T _A =25°C, V _{cc} =3.3V, O _{Load} =10K Ω //10pF.
	Aging Tolerance 1 Years	-1		+1	$\times 10^{-6}$	T _A =25°C, V _{cc} =3.3V and after 1h of operation.
Aging Tolerance 10 Years	-5		+5	$\times 10^{-6}$		
Power Supply	Supply Current			5	mA	@25°C, V _{cc} =3.3V, O _{load} =10K Ω //10pF.
	Supply Voltage	3.135	3.3	3.465	V	
	Short-Term Stability Allan Variance	-0.009		+0.009	$\times 10^{-6}$	Temperature stability, no EMI\EMC or other interference, test after power for 1hour ref. to 25°C; 1s, using PN9000 equipment.



Phase Noise	Phase Noise @25℃		-65	-61	dBc/Hz	1Hz
			-91	-87		10Hz
			-118	-114		100Hz
			-138	-134		1KHz
			-147	-143		10KHz
			-147	-143		40KHz
			-147	-143		100KHz
			-153	-149		1MHz
Environmental Conditions	Operable Temperature	-40		+85	℃	
	Storage Temperature	-55		+125	℃	
	ESD Level	Human Body Model, class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010.				
		Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010.				
	Moisture Sensitivity Level	Level 2.				
	Vibration	Test Condition: 0.75mm ;acceleration:10g;10Hz~2000Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X , Y , Z) .IEC 68-2-06 Test Fc.				
	Shock	100g; 6ms; half sine wave (3 times for each 3 directions X, Y, Z), IEC 68-2-27 Test Ea/Severity 50A.				
Ultra Sonic Cleaning	Cleaning equipment frequency:40KHz;Cleaning solvent : bromopropane ; Cleaning time: 15min. per each time, at least 3 times. Ultrasonic power:1200W					
Full Package Storage	Relative humidity (%)	20%~70%				
	Temperature (℃)	-10~35℃				




2. Mechanical Structure(mm)

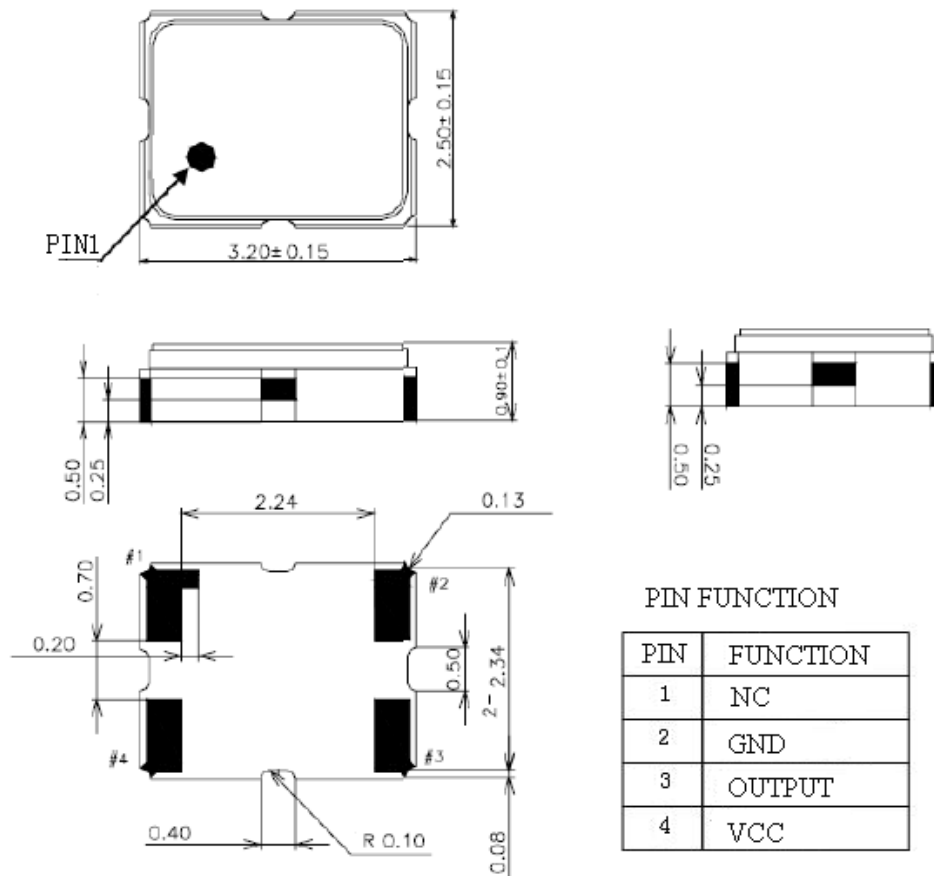

Note1: Tolerance ± 0.1 mm without mark

Note2: Referential weight 0.02g

3. Test circuit

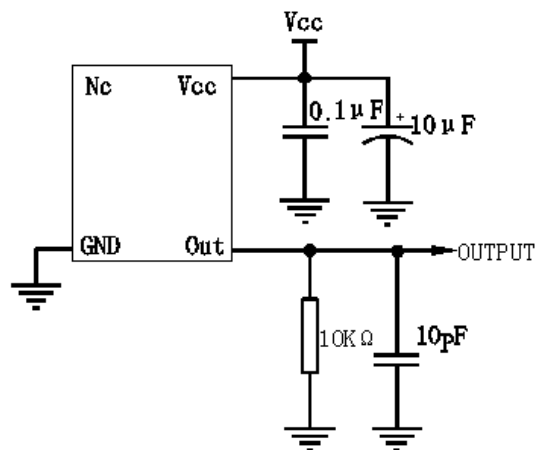



4. Reflow Soldering Curve (RoHS)



5. Package: Tape & Reel (mm)

