

Travelling Merchant: _____

DATASHEET

Standard: DP9C4000002

Plot			The Label
Drew	Audited	Approved	Stamp, please! Thanks!
Date: 2019.10.30			

Guangdong Dapu Telecom Technology Co.,Ltd

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098




1. Electrical Parameters


MODEL: DP9C4000002							
No.	Parameters	SYM.	Electrical Spec.				Notes
			Min.	Typ.	Max.	Units	
1	Nominal Frequency	FL	4.00			MHz	
2	Oscillation Mode	-	Fundamental/AT			-	
3	Load Capacitance	CL	20			pF	
4	Frequency Tolerance	-	-20	-	+20	$\times 10^{-6}$	
5	Frequency Stability	-	-30	-	+30	$\times 10^{-6}$	
6	Operating Temperature Range	-	-40	~	+85	°C	
7	Storage Temperature	-	-55	~	+125	°C	
8	Aging	-	-3	~	+3	$\times 10^{-6}$	Per Year @at 25°C
9	Drive Level	DL	-	100	-	uW	
10	Parallel Capacitance C0	C0	-	-	7	pF	
11	Insulation Resistance		500			MΩ	at DC 100V



2. Mechanical Structure (mm)

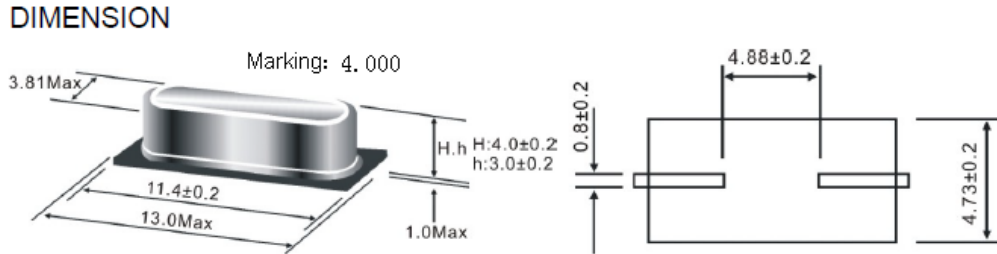

3.Package

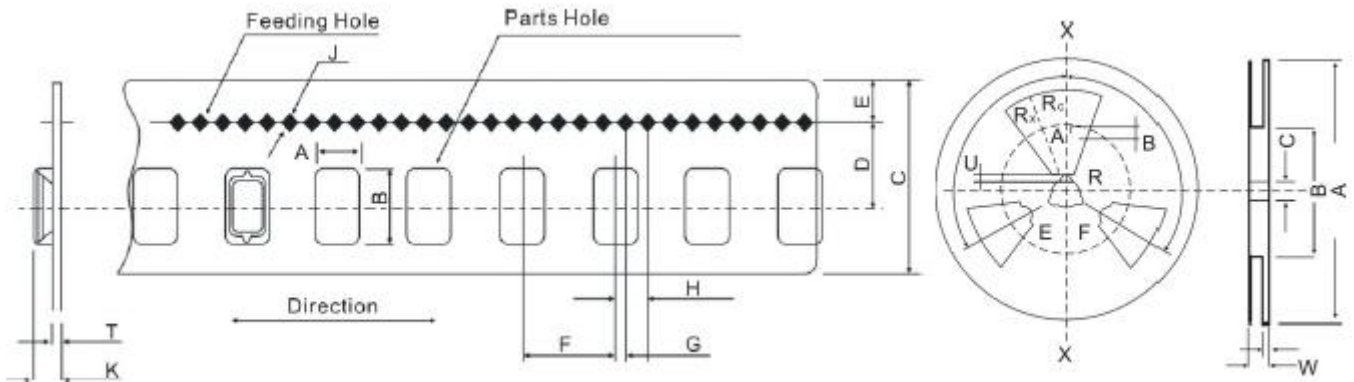

Description		Code	Dimensions	
Flanges	Diameter	A	Φ330±2.0	
	Thickness	T	2.4±0.2	
	Width between Flanges	W	24.4 -0/+2.0	
Flanges	Outline Diameter	B	Φ100±2.0	
	Center Core Slit	Width	F	2.3±1.0
		Depth	V	6.0±1.0
		Position	Q	120°±3.0°
	Spindle Diameter	C	Φ13.0±0.5	
	Key Seats	Width	E	2.5
Depth		U	5.0±0.5	
Position		Q	120°±3.0°	
Fenestrate	Outline Radius	Ro	R90±1.0	
	Inline Radius	Ri	R40±1.0	
	Rounded Corners	Rc	R5 -0/+2.0	
	Open Angle	R	40°±2.0°	