

Travelling Merchant: _____

DATASHEET

Standard: DP9A32770010

Plot			The Label
Drew	Audited	Approved	Stamp, please! Thanks!
Date: 2018.07.12			

Guangdong Dapu Telecom Technology Co.,Ltd

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098




1. Electrical Parameters

MODEL: DP9A32770010							
No.	Parameters	SYM.	Electrical Spec.				Notes
			Min.	Typ.	Max.	Units	
1	Nominal Frequency	FL	32.768			KHz	
2	Oscillation Mode	-	Fundamental			-	
3	Load Capacitance	CL	12.5			pF	
4	Frequency Tolerance	dF/Fo	-20	-	+20	$\times 10^{-6}$	Refer to Center Frequency@25±3℃
5	Stability Over Temperature	dF/F25		-0.034		$\times 10^{-6}/^{\circ}\text{C}^2$	Refer to Operating Temperature
6	Operating Temperature Range	-	-40	~	+85	℃	
7	Storage Temperature Range	-	-40	~	+85	℃	
8	Aging	dF/F25	-5	-	+5	$\times 10^{-6}$	1st Year
9	Drive Level	DL	-	0.1	-	uW	
10	Effective Series Resistance	ESR	-	-	30	kΩ	
11	Shunt Capacitance C0	C0		1.8	3	pF	
12	Insulation Resistance	-	500	-	-	MΩ	at DC 100V
13	ESD Level	Human Body Model,class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010.					
14		Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010.					
15	Moisture Sensitivity Level	Not humidity sensitive.					
16	Vibration	Test Condition: 0.75mm ;acceleration:10g;10Hz~2000Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X ,Y , Z) .IEC 68-2-06 Test Fc.					
17	Shock	100g; 6ms; half sine wave (3 times for each 3 directions X ,Y , Z),IEC 68-2-27 Test Ea/Severity 50A.					




2. Mechanical Structure (mm)

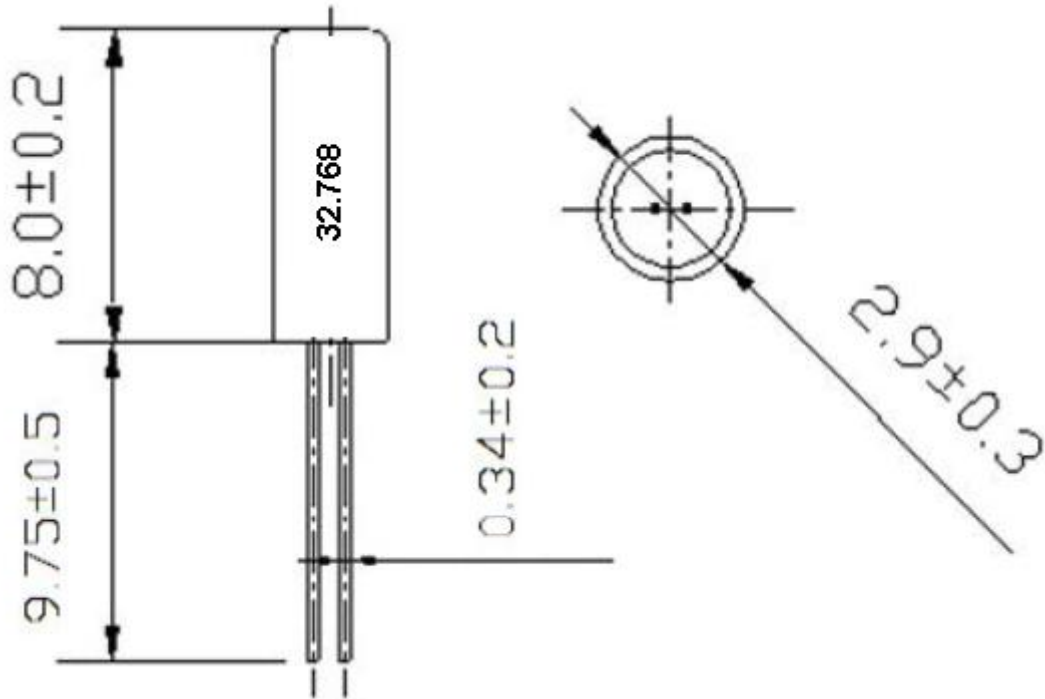


Note1: Tolerance ±0.1mm

3. Wave Soldering Curve (RoHS)

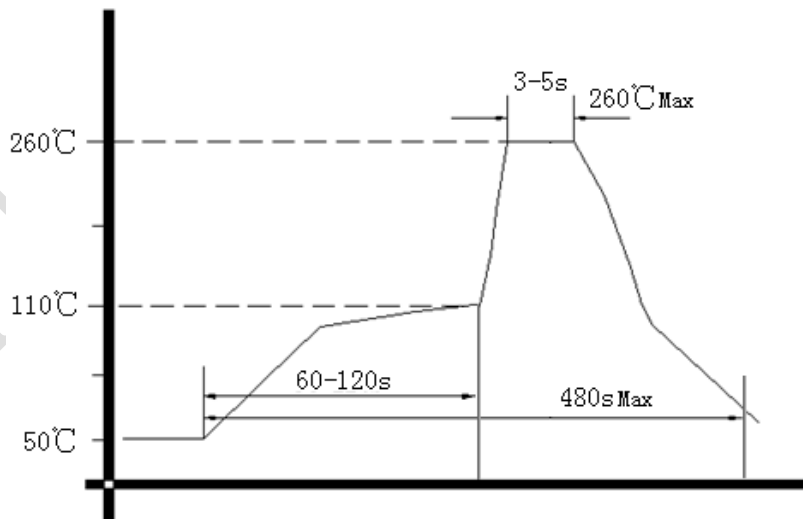



4. Package

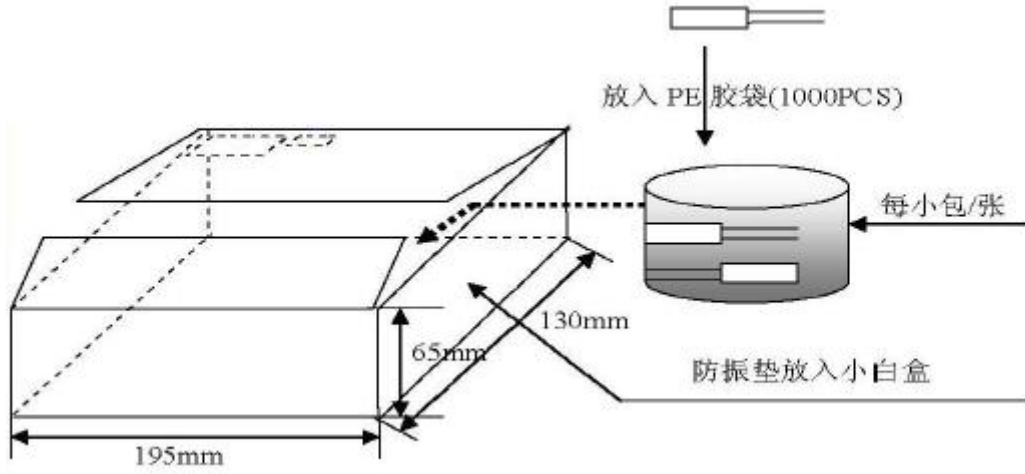

DAPU Confide