

Travelling Merchant: _____

DATASHEET

Standard: **T22-F573-26.00MHz**

P/N: _____

| Plot | | | The Label |
|------------------|---------|----------|------------------------|
| Drew | Audited | Approved | Stamp, please! Thanks! |
| | | | |
| Date: 2020.11.16 | | | |

Guangdong Dapu Telecom Technology Co.,Ltd

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



1. Electrical Parameters


| MODEL: T22-F573-26.00MHz | | | | | | |
|--------------------------|--|-------------------|------|-------|------------------|--|
| Item | Description | Parameters | | | Unit | Test Condition |
| | | Min. | Typ. | Max. | | |
| Output | Frequency | 26.00 | | | MHz | |
| | Output Waveform | Clipped Sine Wave | | | | |
| | Start up time | | | 2 | ms | |
| | Stabilization time | | | 1.5 | ms | Less than +/-2.0ppm of steady state frequency |
| | | | | 0.5 | ms | Less than +/-2.0ppm of steady state frequency |
| | Vp-p | 0.8 | | | V | |
| | Harmonic | | | -5 | dBc | |
| Load | 10KΩ//10pF | | | | | |
| Frequency Stabilities | Frequency Tolerance | -1.5 | | +1.5 | $\times 10^{-6}$ | @25°C |
| | vs. Temperature Range | -1.5 | | +1.5 | $\times 10^{-6}$ | T _A varied from -30°C to 85°C, measurement referenced to frequency observed with T _A =25°C, V _{cc} =1.8V, V _c =0.9V, O _{load} =10KΩ//10pF, temperature variable speed less than 2°C per minute. |
| | Frequency Tolerance vs. Supply Voltage | -0.2 | | +0.2 | $\times 10^{-6}$ | measurement referenced to frequency observed TA=25°C, V _{cc} varied from 1.70V to 1.90V, and O _{Load} =10KΩ//10pF |
| | Frequency Tolerance vs. Load | -0.2 | | +0.2 | $\times 10^{-6}$ | 10% load change measurement referenced to frequency observed with T _A =25°C, V _{cc} =1.8V, and O _{Load} =10KΩ//10pF. |
| | Aging Tolerance Per Day | -0.02 | | +0.02 | $\times 10^{-6}$ | T _A =25°C, V _{cc} =1.8V, and after 1h of operation. |
| | Aging Tolerance 1 Year | -1 | | +1 | $\times 10^{-6}$ | |
| Power Supply | Operating Current | | | 1.5 | mA | @25°C, V _{cc} =1.8V |





| | | | | | | |
|---------------------------------|----------------------------|--|------|------|------------------|--|
| Power Supply | Supply Voltage | 1.70 | 1.80 | 1.90 | V | |
| Phase Noise | Phase Noise@25°C | | | -78 | dBc/Hz | 10Hz |
| | | | | -110 | dBc/Hz | 100Hz |
| | | | | -130 | dBc/Hz | 1KHz |
| | | | | -145 | dBc/Hz | 10KHz |
| | | | | -145 | dBc/Hz | 100KHz |
| Voltage Control Characteristics | Frequency Tuning Range | -15 | | -9 | $\times 10^{-6}$ | $V_c=0.1V$. measurement referenced to $V_c=0.9V$ |
| | | -1.5 | | +1.5 | $\times 10^{-6}$ | $V_c=0.9V$. measurement referenced to Exactly 26.00MHz. |
| | | +9 | | +15 | $\times 10^{-6}$ | $V_c=1.7V$. measurement referenced to $V_c=0.9V$ |
| Environmental Conditions | Operable Temperature | -30 | | +85 | °C | |
| | Storage Temperature | -40 | | +90 | °C | |
| | ESD Level | Human Body Model,class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010. | | | | |
| | | Machine Model, class B: 200V to 400V; JEDEC JESD22-A115C. | | | | |
| | Moisture Sensitivity Level | Level 2. | | | | |
| | Vibration | Test Condition: 0.75mm ;acceleration:10g;10Hz~2000Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X , Y , Z) .IEC 68-2-06 Test Fc. | | | | |
| | Shock | 100g; 6ms; half sine wave (3 times for each 3 directions X , Y , Z),IEC 68-2-27 Test Ea/Severity 50A. | | | | |
| Full Package Storage | Relative humidity (%) | 20% ~70% | | | | |
| | Temperature (°C) | -10~35°C | | | | |



2. Mechanical Structure(mm)

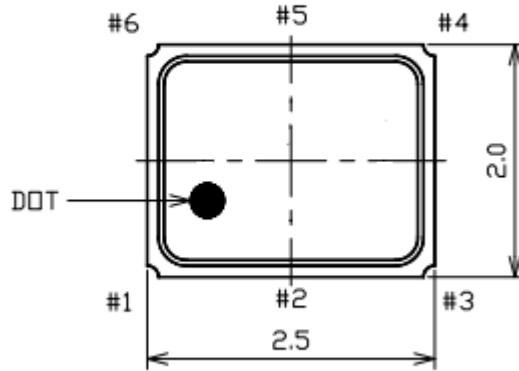


| Terminal land connections | |
|---------------------------|------------|
| #1 | VCONT |
| #3 | GND |
| #4 | OUTPUT |
| #6 | VCC |
| #2/#5 | N/C or GND |

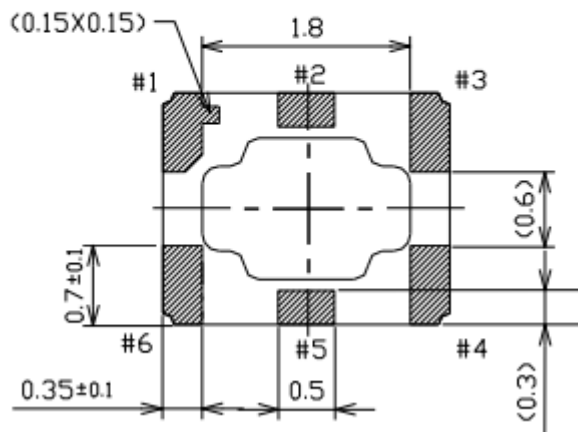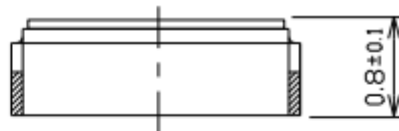


Note1: Tolerance $\pm 0.2\text{mm}$ without mark



3. Test Circuit

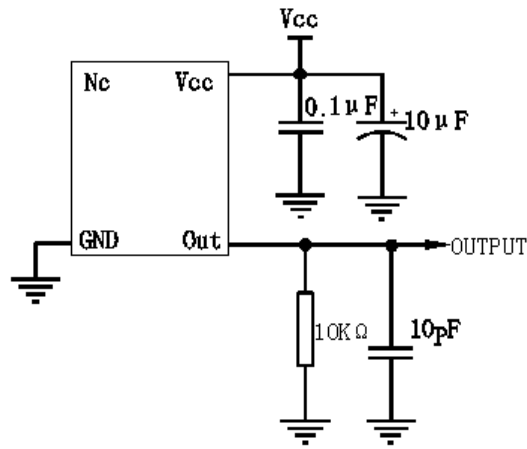

4. Reflow Soldering Curve (RoHS)

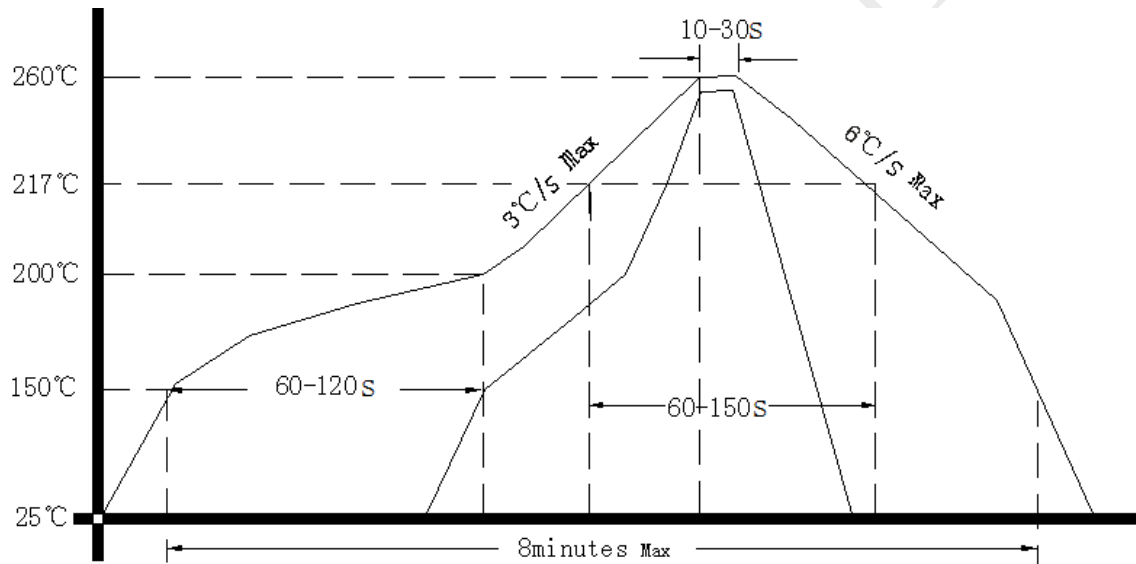

5. Package: Tape & Reel (mm)

