



1. Electrical Parameters

MODEL: O11F-1802-9.60MHz						
Item	Description	Parameters			Unit	Test Condition
		Min.	Typ.	Max.		
Output	Frequency	9.60			MHz	
	Output Waveform	LVTTTL				
	Output Low Voltage			0.4	V	V _{cc} =3.3V, Load =15pF
	Output High Voltage	2.4			V	V _{cc} =3.3V, Load =15pF
	Duty Cycle	45		55	%	Measurement at -40~85°C
	Spurious Suppression			-90	dBc	
	Rise/Fall Time			4	ns	10%~90% V _{cc}
	Load	13.5	15	16.5	pF	
	Start up time			1	s	90% V _{CC} to the correct frequency output time
Frequency Stabilities	Frequency Accuracy	-1		+1	× 10 ⁻⁶	Within 90 days after shipment and 15 minutes warm up time(before reflow), Measurement referenced to nominal frequency
		-0.1		+0.1	× 10 ⁻⁶	Within 90 days after shipment and 5 minutes warm up time (after reflow), Measurement referenced to initial frequency (after 2 hours and 5 minutes warm up time after reflow)
		-1		+1	× 10 ⁻⁶	After 2 hours and 5 minutes warm up time (after reflow), Measurement referenced to the frequency (before reflow)
	Frequency Stability vs. Operating Temperature Range	-3		+3	× 10 ⁻⁹	T _A varied from 0 to 75°C, V _{cc} =3.3V, and Load = 15pF.Measurement referenced to frequency observed With T _A = 25°C, V _{cc} =3.3V.
	Frequency Tolerance after Temperature compensated vs Operating Temperature Range	-0.3		+0.3	× 10 ⁻⁹	TA varied from 0 to 75°C, V _{cc} =3.3V, and Load =15 pF. Measurement referenced to frequency observed With T _A = 25°C, V _{cc} =3.3V.
		-5		+5	× 10 ⁻⁶	T _A varied from -40 to 85°C, V _{cc} =3.3V, and Load =15pF. Measurement referenced to frequency observed With T _A = 25°C, V _{cc} =3.3V. air condition.



Frequency Stabilities	Short-Term Stability: Allan Variance			0.01	$\times 10^{-9}$	Temperature stability, no EMI\EMC or other interference, test after power for 1hour ref. to 25°C; 1s.
	Frequency Stability vs. Supply Voltage	-1		1	$\times 10^{-9}$	T _A =25°C, V _{cc} varied from 3.13 to 3.47V and Load =15pF. Measurement referenced to frequency observed with T _A = 25°C, V _{cc} =3.3V.
	Frequency Tolerance vs Load	-1		1	$\times 10^{-9}$	10% Load Change Measurement referenced to frequency observed with T _A = 25°C, V _{cc} =3.3V.
	Temperature Accuracy			1	°C	T _A varied from 0 to 75°C, V _{cc} =3.3V, and Load = 15pF. Measurement T _A
	Aging Tolerance per day	-0.5		+0.5	$\times 10^{-9}$	V _{cc} , T _A constant Measurement referenced to frequency observed with T _A =25°C, V _{cc} =3.3V. and after 30 days of operation
	Aging Tolerance per month	-12		+12	$\times 10^{-9}$	
	Aging Tolerance 1 Years	-0.08		+0.08	$\times 10^{-6}$	
	Aging Tolerance 10 Years	-0.5		+0.5	$\times 10^{-6}$	
Power Supply	Supply Voltage	3.13	3.3	3.47	V	
	Steady Consumption			450	mA	@25°C
	Warm up current			1000	mA	When all temp range
	Warm Up Time			5	minute	
	Warm Up	-0.02		+0.02	$\times 10^{-6}$	After warm up 10 minutes. Measurement referenced to frequency observed with T _A = 25°C, V _{cc} =3.3V. and after 24 hour of operation.
Phase Noise	Phase Noise			-80	dBc/Hz	1Hz
				-120		10Hz
				-140		100Hz
				-145		1KHz
				-150		10KHz
				-150		100KHz
Environmental Conditions	Operable Temperature range	-40		85	°C	
	Operating Temperature	0		75	°C	
	Storage Temperature	-55		105	°C	
	Temperature Rate of Change			1	°C/min	







	Jitter			1.6	ps-rms	12kHz-5MHz	
	Air-tightness			0.1	Pa.cm3/s	Not include PCB conversion board.	
	ESD Level	Human Body Model, class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010.					
		Machine Model, class B: 200V to 400V; JEDEC JESD22-A115C.					
	Moisture Sensitivity Level	Level 2.					
	Vibration	Test Condition: 0.75mm ;acceleration:10g;10Hz~500Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X ,Y , Z), IEC 68-2-06 Test Fc.					
	Shock	50g; 11ms; half sine wave (3 times for each 3 directions X ,Y, Z),IEC 68-2-27 Test Ea/Severity 50A.					
RoHS Compliant, REACH Compliant							
Full Package Storage	Relative humidity (%)	20% ~70%					
	Temperature (°C)	-10~35°C					

DAPU Confidential




2. Mechanical Structure (mm)

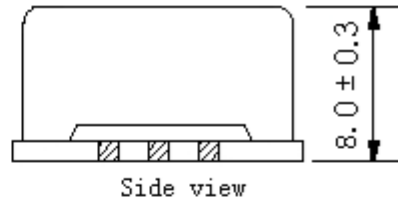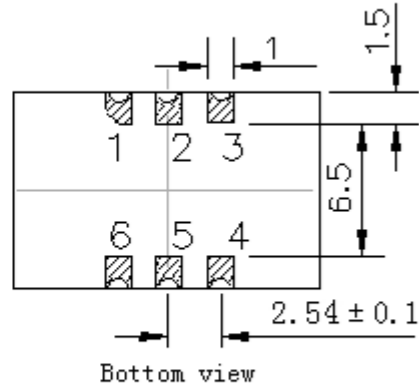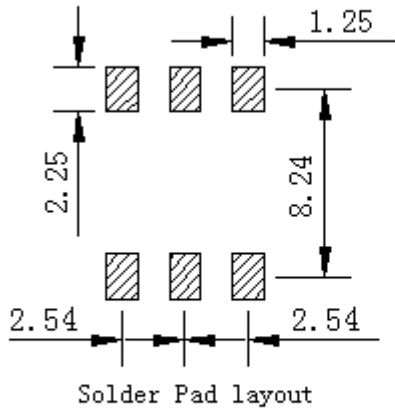

PIN FUNCTION

PIN	NOTATION	FUNCTION
1	NC	Not Connect
2,5	NC	Not Connect
3	GND	GND
4	OUTPUT	RF Output
6	VCC	Supply Voltage

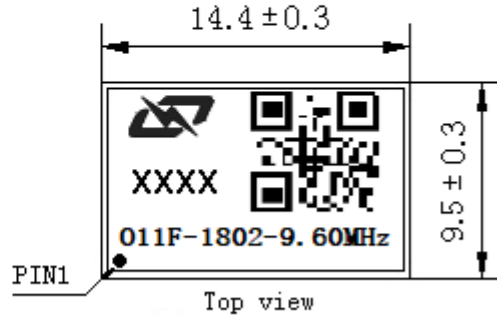

Note1: Tolerance $\pm 0.20\text{mm}$ without mark


Note2: The first two xx representative: year.
After two xx representative: week.

Note3: Referential weight 2.4g


Note4: NC is not connect



3. Test Circuit

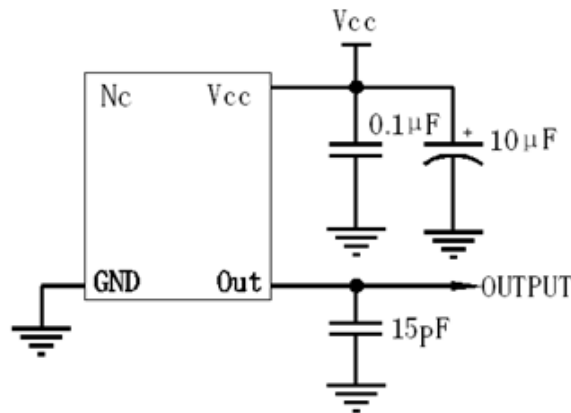

4. Reflow Soldering Curve (RoHS)

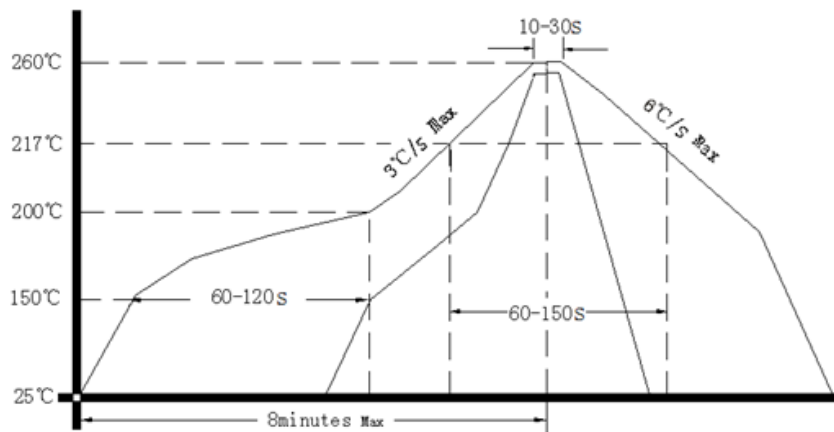

Note: Passing through reflow upside down is not supported

5. Package: Tape & Reel (mm)

