

Customer Code :

DATASHEET

DAPU P/N: DPBA10000008

Plot			The Label
Drew	Audited	Approved	Stamp, please! Thanks!
Jack	David	William	
Date: 2023.02.09			

Guangdong Dapu Telecom Technology Co.,Ltd

Building 5, No.24, Industrial East Road, Songshanhu Park, Dongguan, Guangdong, P.R. China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098




1、Electrical Parameter

MODEL: DPBA1000008							
No.	Parameters	SYM.	Electrical Spec.				Notes
			Min.	Typ.	Max.	Units	
1	Nominal Frequency	FL	100.00			MHz	
2	Supply Voltage	Vdd	3.135	3.3	3.465	V	
3	Frequency Tolerance		-15		+15	$\times 10^{-6}$	At 25°C
4	Frequency Stability		-50		+50	$\times 10^{-6}$	Over Operating Temperature Range
5	Operating Temperature	T-opr	-55	~	+125	°C	
6	Storage Temperature	T-stg	-55	~	+125	°C	
7	Current Consumption	Idd	-		80	mA	
Enable Feature							
8	“H”Input Voltage	VIH	Vdd*0.7			V	
9	“L”Input Voltage	VIL			Vdd*0.3	V	
10	E/D(#2 pin E/D)	Logic “1”Or Floating input,Outputs enable; Logic “0” ,Outputs disable					
Output LVDS							
11	“H”Onput Voltage	VOH	1.6			V	
12	“L”Onput Voltage	VOL			0.9	V	
13	Duty Cycle	DC	45		55	%	
14	RMS Jitter				0.5	ps	10kHz to 20MHz



2、Mechanical Structure

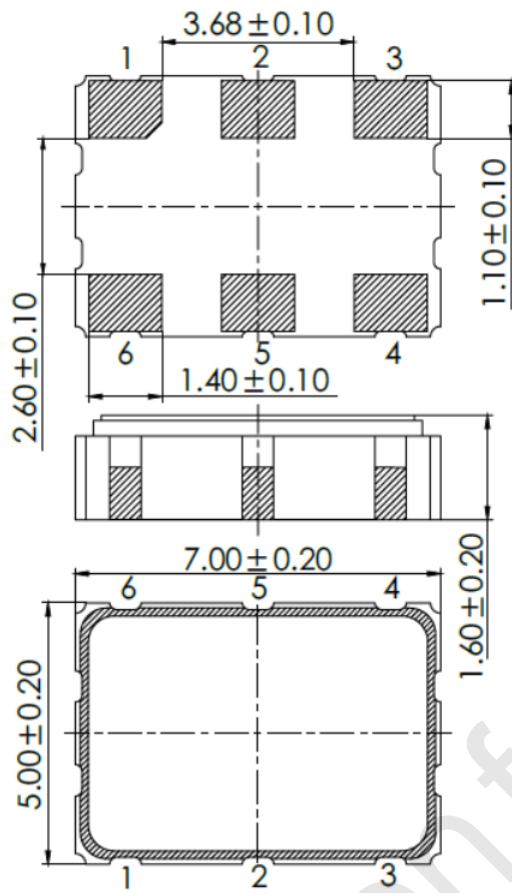

Pin Connections:

- Pin1: N/C
- Pin2: E/D
- Pin3: GND
- Pin4: Output (+)
- Pin5: Output (-)
- Pin6: Vdd