




## DP2492C

### ENG PART:DP-25.4X25.4CD-2400T2500-CCW

2400MHz to 2500MHz Single-Junction Drop-in Circulator

REV.	DESCRIPTION	REVISOR	DATE	APPROVED
1	Creating datasheet	ZC.Wu	2023/3/29	Nick

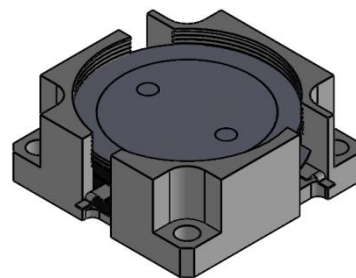


#### Applications:

- Wireless Infrastructure
- Power Amplifier

#### Features:

- Operating frequency range:2400MHz to 2500MHz
- Operating temperature range:-10°C to +110°C
- Storage temperature range: -55°C to +125°C
- BeOfree&RoHS compliant



Block Diagram



### Electrical Specifications:


ITEM	SPECIFICATION	
Frequency	2400-2500	MHz
Direction	CCW	
Impedance	Typ: 50	$\Omega$
Insertion Loss (Max.)	0.10 Typ. 0.13 @-10~+110°C	dB
Isolation (Min.)	23 @-10~+110°C	dB
Return Loss (Min.)	23 @-10~+110°C	dB
Power FWD/REV/PEAK	350/350/1000(be able to operate for the long term at 350W full power without any degradation at 80°C base temperature)	W
IMD (Max.)	/	dBc
Impedance ,real	/	$\Omega$
Impedance ,imaginary	/	j $\Omega$

Notes:

1. Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.
2. Performance is guaranteed under the conditions listed in this table and over the operating temperature range.



### Mechanical Specifications:

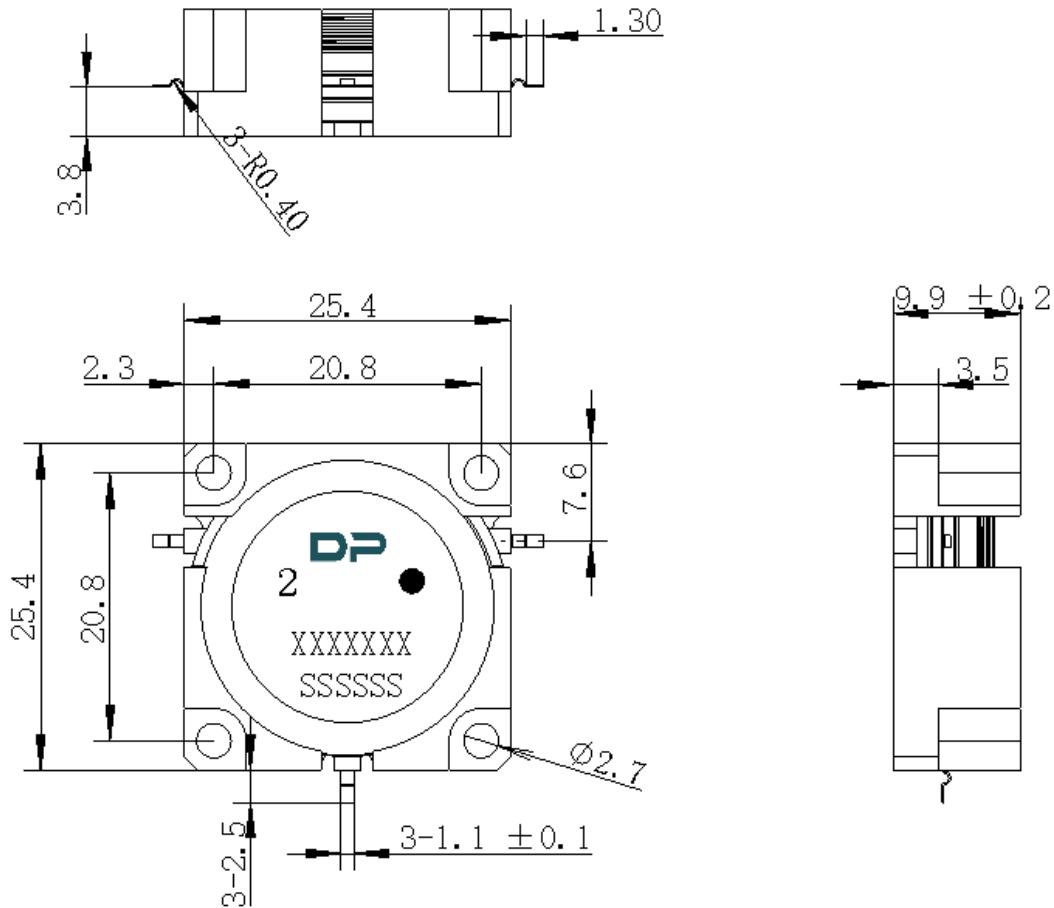

Unit: Millimeters

#### Notes:

1. The housing is steel (nickel-plated) and the circuit is copper (silver-plated) .
2. Tolerance  $\pm 0.2$ mm unless otherwise specified.
3. Co-planarity Specification: 0.1mm maximum.
4. Part Number, Lot Code, and Port Designation are printed on the top side of device.
5. The XXXXXXX on the label represents the part number
6. The SSSSSS on the label represents the serial number
7. The black dot on the label represents the input port