




## DP2048S

### ENG PART:DP-35x42ID-758T960-CCW

758MHz to 960MHz Single Junction Drop-in Isolator

REV.	DESCRIPTION	REVISOR	DATE	APPROVED
A	Creating datasheet	Jie.Jiang	2022/4/29	Nick
B	Added IMD spec. and update outline drawing	ZC.Wu	2022/5/7	Nick
B1	Updated the spec.	ZC.Wu	2023/1/29	Nick




#### Applications:

- Wireless Infrastructure
- Power Amplifier

#### Features:

- Operating frequency range: 758MHz to 960MHz
- Operating temperature range: -40°C to +85°C
- Storage temperature range: -40°C to +120°C
- Small surface-mount package delivered on T&R
- BeOfree&RoHS compliant



Block Diagram



### Electrical Specifications:


ITEM	SPECIFICATION	
Frequency	758-960	MHz
Direction	CCW	
Impedance	Typ: 50	$\Omega$
Insertion Loss (Max.)	0.25@+25°C 0.30@-40°C~+85°C.	dB
Isolation (Min.)	21@+25°C 19@-40°C~+85°C.	dB
Return Loss (Min.)	21@+25°C 19@-40°C~+85°C	dB
3rd IMD (Max.)	-62 @2x44dBm CW tones, spacing 1MHz	dBc
Group delay	-	ns
2nd harmonic	-	dBc
Power FWD/REV/PEAK	150/150/500	W
Termination/Attenuator	-	W/dB

Notes:

1. Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.
2. Performance is guaranteed under the conditions listed in this table and over the operating temperature range.



Mechanical Specifications:

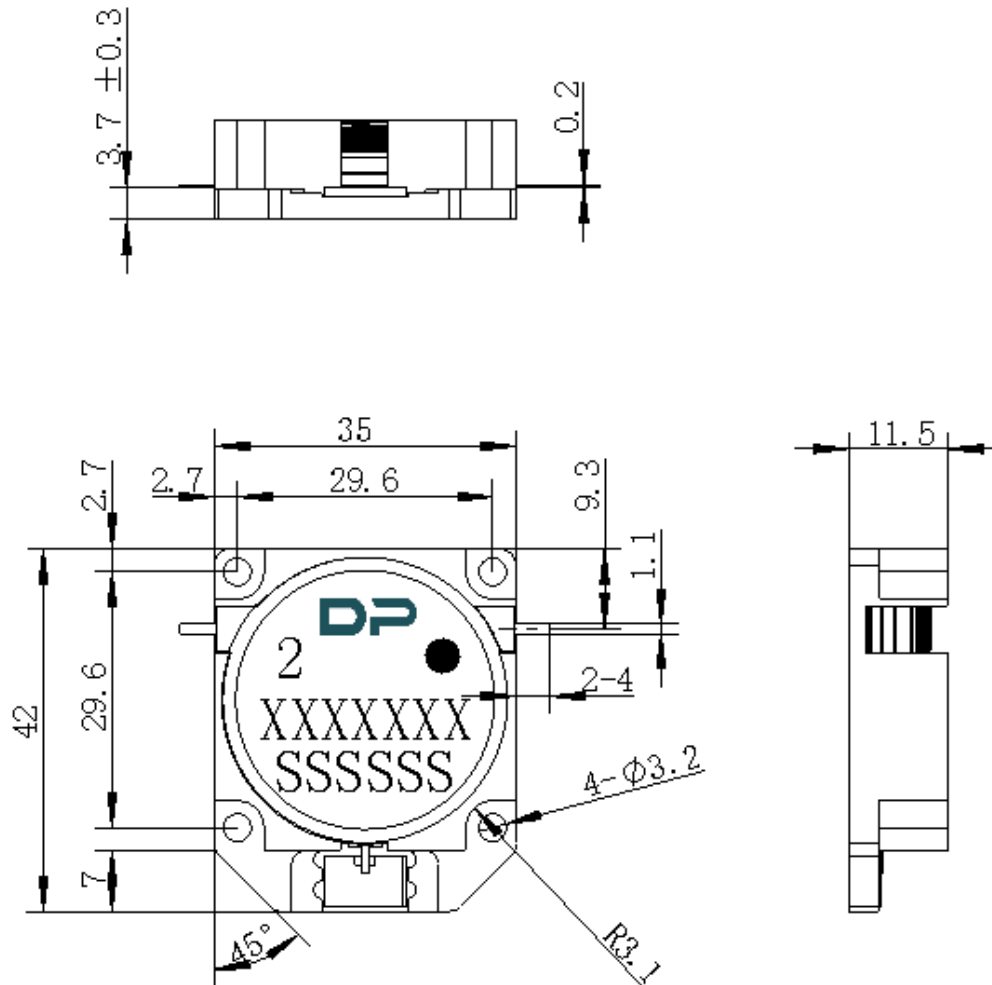

Unit: Millimeters

Notes:

1. The housing is nickel-plated and the tab is silver-plated.
2. Tolerance  $\pm 0.2$  mm unless otherwise specified.
3. Co-planarity Specification: 0.1 mm maximum.
4. Part Number, Lot Code, and Port Designation are printed on the top side of device.
5. The **XXXXXXX** on the label represents the part number
6. The **SSSSSS** on the label represents the serial number
7. The black dot on the label represents the input port