

Customer Code: _____

DATASHEET

DAPU P/N: DPX1032K7680125A002

DAPU			Customer Approval
Drew	Audited	Approved	
Jieshu ZHENG	Jianhua LIN	Gangtao FENG	
Date: 2024/5/8			
			Stamp, please! Thanks!


Guangdong Dapu Telecom Technology Co.,Ltd

Bldg 5, SSL Modern Enterprise Accelerator Zone, Dongguan City, Guangdong Province, PRC China
TEL: 0086-0769-88010888 FAX: 0086-0769-81800098


1、Electrical Parameter

MODEL :		DPX1032K7680125A002					
No.	Parameters	SYM.	Electrical Spec.				Notes
			Min.	Typ.	Max.	Units	
1	Specification	-	1610			-	
2	Nominal Frequency	FL	32.768			KHz	
3	Oscillation Mode	-	Fundamental			-	
4	Load Capacitance	CL	12.5			pF	
5	Frequency Tolerance	-	-10		10	$\times 10^{-6}$	At 25°C (Not include aging)
6	Turnover Temperature	-		25±5		°C	
7	Operating Temperature	Topr	-40		85	°C	
8	Storage Temperature	Tstg	-40		85	°C	
9	Drive Level	DL		0.1	0.5	μW	
10	Equivalent Series Resistance	ESR			80	KΩ	At 25°C
11	Parabolic Coefficient	-	-0.040			ppm/°C ²	
14	Shunt capacitance	C0		1.3	-	pF	
15	Insulation Resistance	IR	500			MΩ	
16	Standard	-	-			-	

2、 Dimension drawing (Unit: mm)

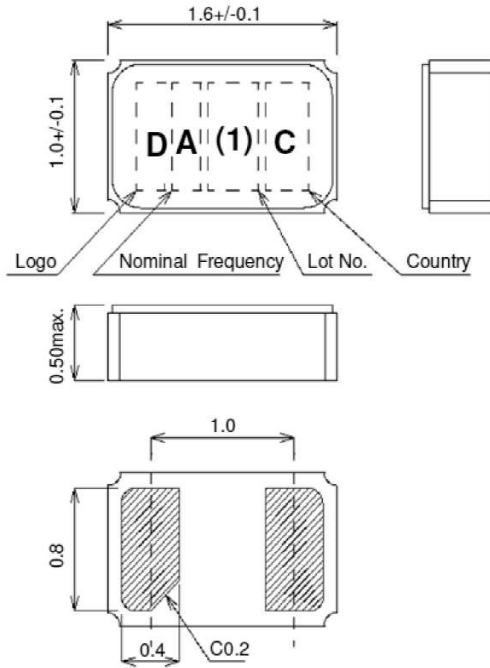


<TOP VIEW>



- D** : manufacturer's code
- A** : Nominal Frequency "A" as 32.768kHz
- (1)** : Lot. No. **145**
- C** : The place of origin(Made in China)

3、 Reflow soldering

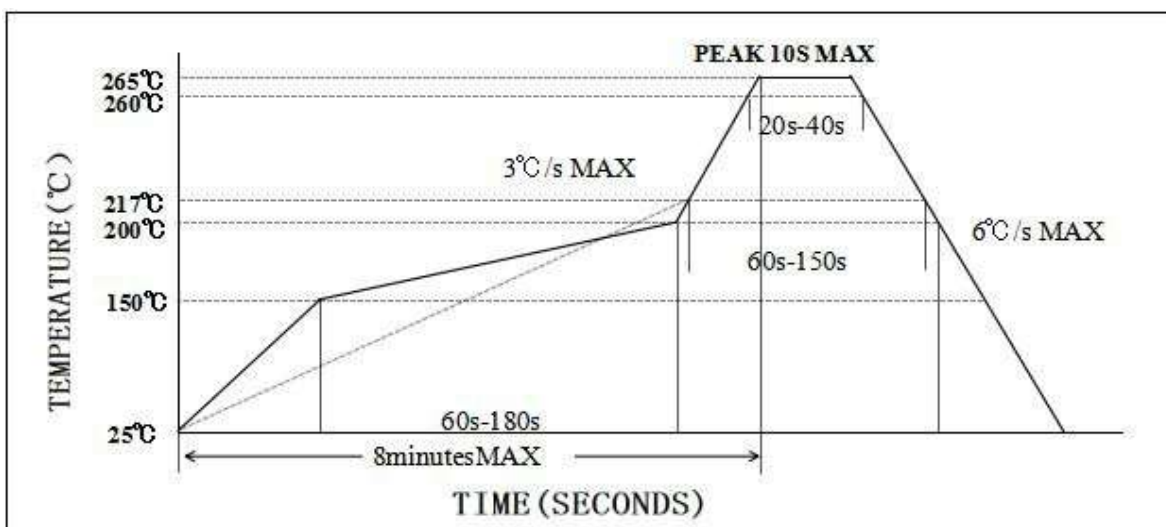

4、 Package: Tape & Reel (mm)

