

Travelling Merchant: _____

DATASHEET

Standard: DP8X26M00001

Plot			The Label
Drew	Audited	Approved	Stamp, please! Thanks!
Date: 2023.09.18			

Guangdong Dapu Telecom Technology Co.,Ltd

Building 5, No.24, Industrial Road East, Songshanhu Park, Dongguan, Guangdong, P.R. China


TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



1、 Electrical Parameters


MODEL: DP8X26M00001							
No.	Parameters	SYM.	Electrical Spec.				Notes
			Min.	Typ.	Max.	Units	
1	Nominal Frequency	FL	26.000			MHz	
2	Mode of Vibration	-	Fundamental			-	
3	Load Capacitance	CL	8			pF	
4	Frequency Tolerance	FL	-10	-	+10	$\times 10^{-6}$	@ 25°C
5	Stability over operation temperance	TC	-20	-	+20	$\times 10^{-6}$	
7	Aging	-	-3	-	+3	$\times 10^{-6}$	Per Year
8	Drive Level	DL		100		μ W	
9	Effective Resistance Rr	Rr	-	-	80	Ω	
10	Shunt Capacitance C0	C0	0	-	3	pF	
11	Insulation Resistance	-	500	-	-	M Ω	At DC 100V
12	Operating Temperature		-40	~	+85	°C	
13	Storage Temperature Range	-	-55	~	+125	°C	
14	Moisture Sensitivity Level	Level 1.					

2、 Mechanical Structure(mm)

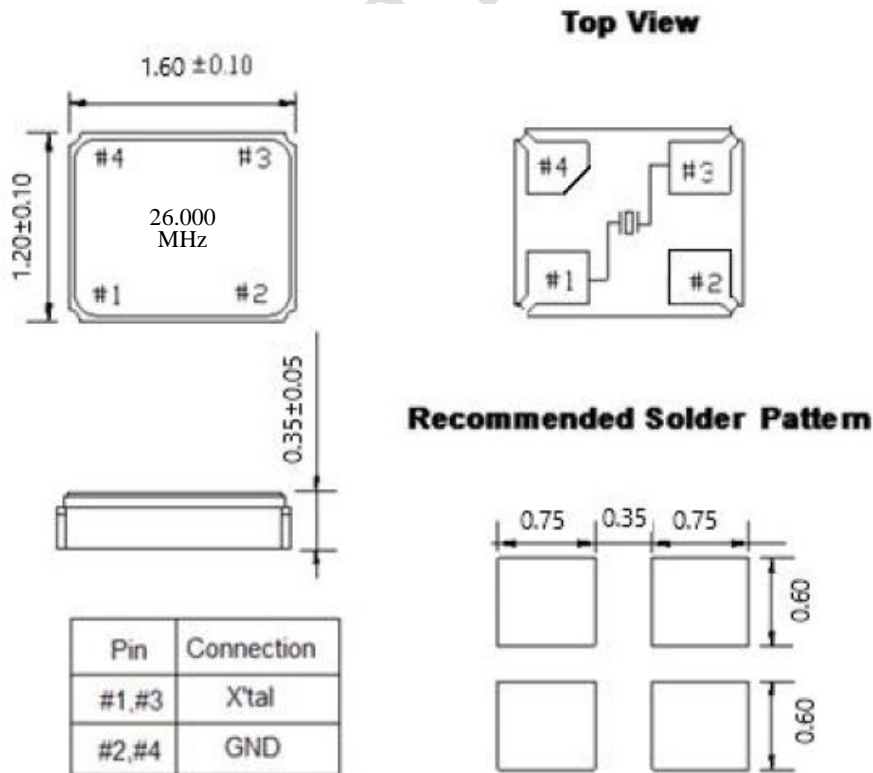



3、 Reflow Soldering Curve (RoHS)

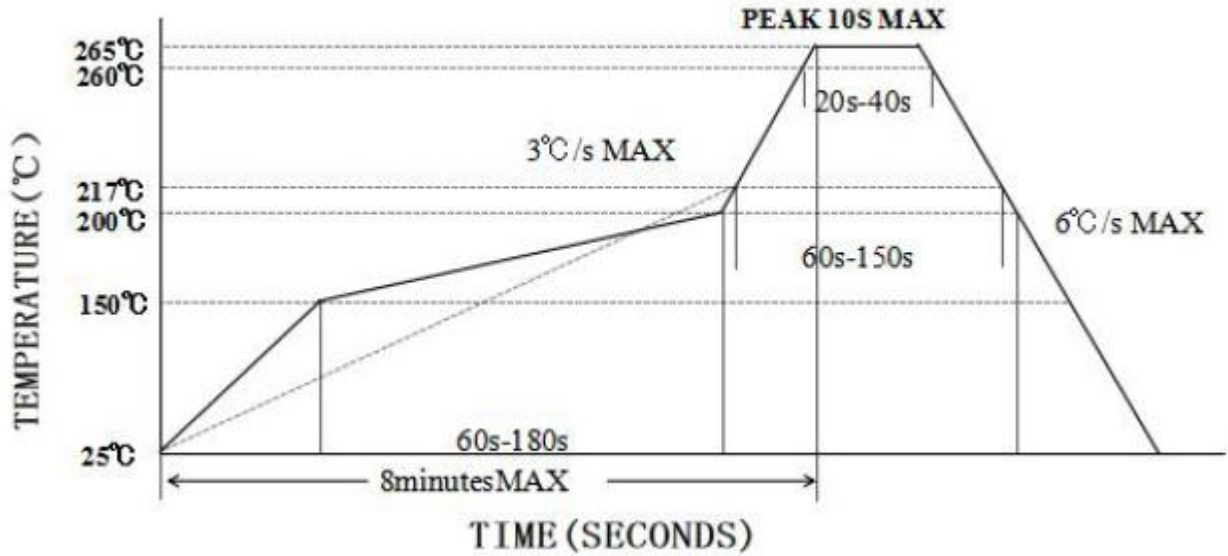

4、 Packing(mm)

