

Travelling Merchant: _____

DATASHEET

Standard: CM65A-D129-10.00MHz

P/N: _____

Plot			The Label
Drew	Audited	Approved	Stamp, please! Thanks!
Date: 2013.12.30			

Guangdong Dapu Telecom Technology Co.,Ltd

Bldg13-16,.N.Ind.Zone,SSL Industry Park, GuangDong City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098



1. Electrical Parameters

1 PPS Reference Input	Parameters	Min.	Typ.	Max.	Unit.	Test Condition	
	Waveform	HCMOS					
High-Level Output Voltage (V_{IH})	2.7				V	50Ω	
Low-Level Output Voltage (V_{IL})			0.4		V		
Pulse Width	10				μs		
Connector	Pin 10						
State Input	Parameters	Min.	Typ.	Max.	Unit.	Test Condition	
	Lock Enable	2.7			V	<5mA Load	
	Lock Disable			0.4	V	<5mA Load	
	Connector	Pin 8					
RF Output	Parameters	Min.	Typ.	Max.	Unit.	Test Condition	
	Nominal Frequency	10.00				MHz	
	Waveform	HCMOS					
	High-level Output Voltage (V_{OH})	2.7				V	<5mA Load
	Low-level Output Voltage (V_{OL})			0.4		V	<5mA Load
	Rise/Fall Time			8		ns	<5mA Load
	Duty Cycle	45	50	55		%	<5mA Load
	Accuracy	-1		+1		$\times 10^{-12}$	24 hours average when locked to 1 PPS
	Short-term Stability			5		$\times 10^{-12}$	Temperature stability, no EMI/EMC or other interference, test after power for 1 hour ref. to 25°C; 1s, using PN9000 equipment.
	Aging Tolerance Per Day	-0.2		+0.2		$\times 10^{-9}$	V_{cc}, T_A constant measurement referenced to frequency observed with $T_A=25^\circ\text{C}, V_{cc}=5.0\text{V}$, in FREE RUN condition and after 30 days of operation.
	Aging Tolerance 1 Year	-0.01		+0.01		$\times 10^{-6}$	
	Phase Noise (All conditions)			-125	-115	dBc/Hz	
				-145	-135		100Hz
				-150	-145		1KHz
			-152	-147	10KHz		
			-155	-150	100KHz		
			-155	-150	1MHz		
Connector	Pin 2						




Holdover Capability	Holdover Time	Min.	Typ.	Max.	Unit.	Test Condition	
	24 Hours	-1.5		+1.5	μs	ΔT=±5℃, 24 hours holdover after turn on 7days and lock 2days. Temperature variable speed less than 1℃per minute	
Supply Voltage	Parameters	Min.	Typ.	Max.	Unit.	Test Condition	
	Supply Voltage	4.75	5.0	5.25	V		
	Current Consumption			2500	mA	During Warm-up	
				1000	mA	During steady state operation @25℃	
	AC Ripple			50	mVpk-pk	10Hz to 1MHz	
Connector	Pin 12						
1 PPS Output Waveform Characteristics	Parameters	Min.	Typ.	Max.	Unit.	Test Condition	
	Waveform	HCMOS					
	High-Level Output Voltage(V _{OH})	2.7			V	50Ω	
	Low-level Output voltage (V _{OL})			0.4	V		
	Pulse Width		100		ms		
	Connector	Pin 3					
State Output	Parameters	Min.	Typ.	Max.	Unit.	Test Condition	
	Lock	2.7			V	<5mA Load	
	Free run/Holdover			0.4	V	<5mA Load	
	Connector	Pin 5					
Serial Interfaces	Parameters	Min.	Typ.	Max.	Unit.	Test Condition	
	Rx high-level Input Voltage (V _H)	2.7			V		
	Rx low-level Input Voltage (V _L)			0.4	V		
	Tx high-level Output Voltage (V _H)	2.7			V		
	Tx low-level Output Voltage (V _L)			0.4	V		
	Serial Protocol	9600-N-8-1					
	Connector	Pin6 and Pin7					
Environmental Conditions	Parameter	Conditions					
	Operating temperature	-20℃ to +75℃					
	Storage Temperature	-55℃ to +105℃					
	Storage humidity	30%~80%					




	ESD Level	Human Body Model,class2: 2000V to 4000V; ANSI/ESDA/JEDEC JS-001-2010. Machine Model, class B: 200V to 400V; ANSI/ESDA/JEDEC JS-001-2010.
	Moisture Sensitivity Level	Not humidity sensitive.
	Vibration	Test Condition: 0.75mm ;acceleration:10g;10Hz~500Hz, one cycle per 30 min, test 2 hour. (3 times for each 3 directions X ,Y , Z), IEC 68-2-06 Test Fc.
	Shock	50g; 11ms; half sine wave (3 times for each 3 directions X ,Y , Z),IEC 68-2-27 Test Ea/Severity 50A.


2. Mechanical Structure(mm)

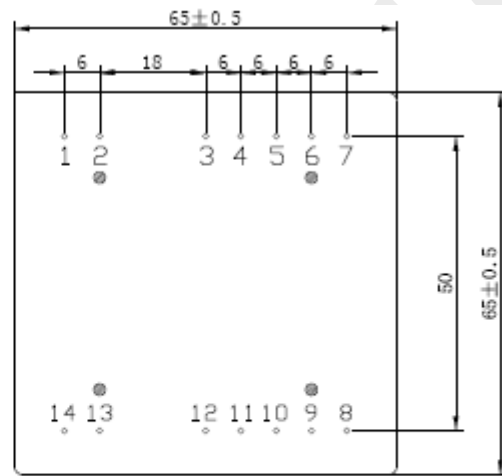


Bottom view

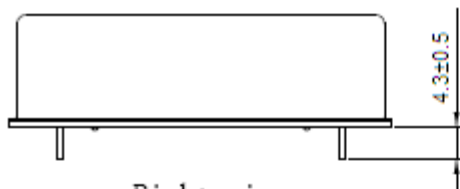

Right view

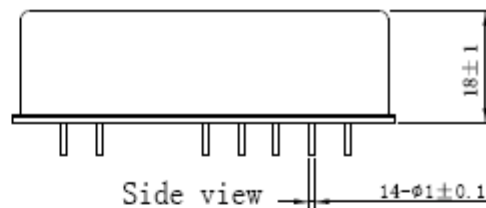

Side view

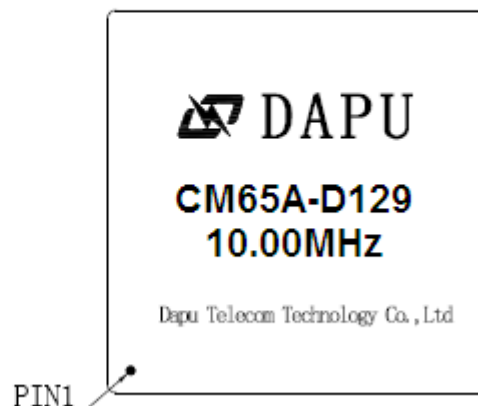

Top view

Note1: Tolerance $\pm 0.2\text{mm}$ without mark

Note2: Referential Weight $135\pm 15\text{g}$

**PIN DEFINITION**

PIN	Name	DESCRIPTION	
2	10MHz OUTPUT	10MHz OCXO frequency output.	
3	1PPS OUTPUT	The clock module 1PPS output.	
5	State OUTPUT	State output. Output high level when the CM is locked and stable, others low level.	
6	RX INPUT	Asynchronous serial data input.9600-N-8-1.	
7	TX OUTPUT	Asynchronous serial data output.9600-N-8-1.	
8	State INPUT	H: Lock Enable	The work state is set to normal operation when the state input is high level.
		L: Lock Disable	The module cannot be locked when the state input is low level.
10	1PPS INPUT	1PPS reference input.	
12	VCC	Power supply input, 4.75V to 5.25V.	
1、14	NC	Not connected.	
4、9、11、13	GND	GND	

3. Holdover capability Reference

First holdover time	$\pm 1.5\mu\text{S}$ Holdover capability(hour) after GPS recover 1~47hours	
X(hour)	Training time ≥ 7 days	Training time =4~6days
1	≥ 23	≥ 12
2	≥ 23	≥ 12
3	≥ 22	≥ 11
4	≥ 21	≥ 10
5	≥ 21	≥ 10
6	≥ 20	≥ 10
7	≥ 19	≥ 9
8	≥ 19	≥ 9
9	≥ 18	≥ 9
10	≥ 17	≥ 8
11	≥ 16	≥ 8
12	≥ 16	≥ 8
13	≥ 15	≥ 7
14	≥ 15	≥ 7
15	≥ 14	≥ 7
16	≥ 13	≥ 6
17	≥ 12	≥ 6
18	≥ 12	≥ 6
19	≥ 11	≥ 5
20	≥ 10	≥ 5
21	≥ 9	≥ 4




22	≥9	≥4
23	≥8	≥4
24	≥8	≥4
25	≥7	≥3
26	≥6	≥3
27	≥5	≥2
28	≥5	≥2

±1.5μS holdover capability after locked for 4~6days: ≥12hours .

±1.5μS holdover capability after GPS recover over 48hours: ≥24hours (Power on time≥7days)
 ≥12hours (Power on time=5~6days) .


4. Coding Rules

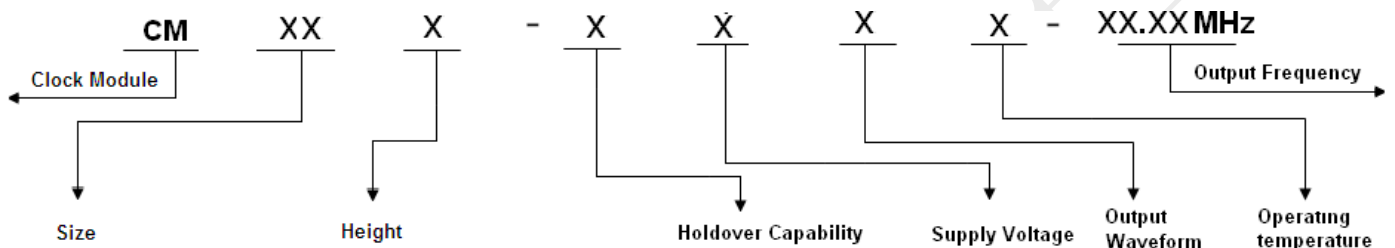

Size		Height	Holdover Capability		Supply Voltage	Output Waveform	Operating temperature
55	50×50 (mm)	A	±1.5μs	0°C~60°C	1	1	1
66	60×60 (mm)	B	±3.0μs	0°C~60°C	5.0V	2	2
65	65×65 (mm)	C	±8.0μs	0°C~60°C		1	9
		F	±1.5μs	ΔT=±5°C		Sine Wave	0°C~80°C
		G	±3.0μs	ΔT=±5°C		HCMOS	-10°C~70°C
		H	±8.0μs	ΔT=±5°C			-20°C~75°C
		K	±1.5μs	ΔT=±5°C			
		L	±3.0μs	ΔT=±5°C			
			±8.0μs	ΔT=±5°C			
			±1.5μs	ΔT=±2°C			
			±3.0μs	ΔT=±2°C			
			±8.0μs	ΔT=±2°C			
			±1.5μs	ΔT=±2°C			
			±3.0μs	ΔT=±2°C			
			±8.0μs	ΔT=±2°C			



5. Reflow Soldering Curve (RoHS)

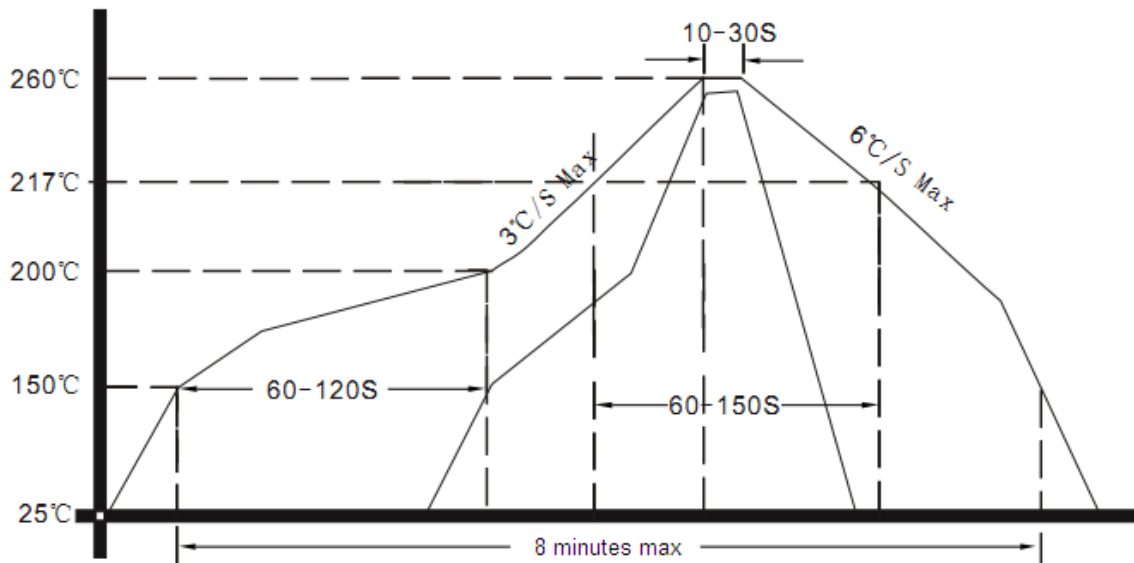

6. Package (mm)

