

Travelling Merchant: _____

DATASHEET

Standard: **DPAB24000001**

Plot			The Label
Drew	Audited	Approved	Stamp, please! Thanks!
Date: 2019.02.19			

Guangdong Dapu Telecom Technology Co.,LTD

Bldg13-16,.N.Ind.Zone,SSL Industry Park, Dongguan City, Guangdong Province, China

TEL: 0086-0769-88010888 FAX: 0086-0769-81800098




1、 Electrical Parameters

MODEL: DPAB2400001							
No.	Parameters	SYM.	Electrical Spec.				Notes
			Min.	Typ.	Max.	Units	
1	Nominal Frequency	FL	24.00			MHz	
2	Oscillation Mode	-	Fundamental			-	
3	Load Capacitance	CL	20			pF	
4	Frequency Tolerance	-	±20			×10 ⁻⁶	at 25°C
5	Frequency Stability	-	±30			×10 ⁻⁶	
6	Operating Temperature	-	-40	~	+85	°C	
7	Storage Temperature Range	-	-55	~	+125	°C	
8	Aging	-			±3	×10 ⁻⁶	1st Year
9	Drive Level	DL		100		uW	
10	Equivalent Series Resistance	ESR	40			Ω	
11	Shunt Capacitance C0	C0			7	pF	
12	Insulation Resistance	IR	500	-	-	MΩ	AT DC100V±15V
13	Shock Resistance	Drop test of 3 times on 2mm stainless plate from 75cm height					




2、Mechanical Structure(mm)

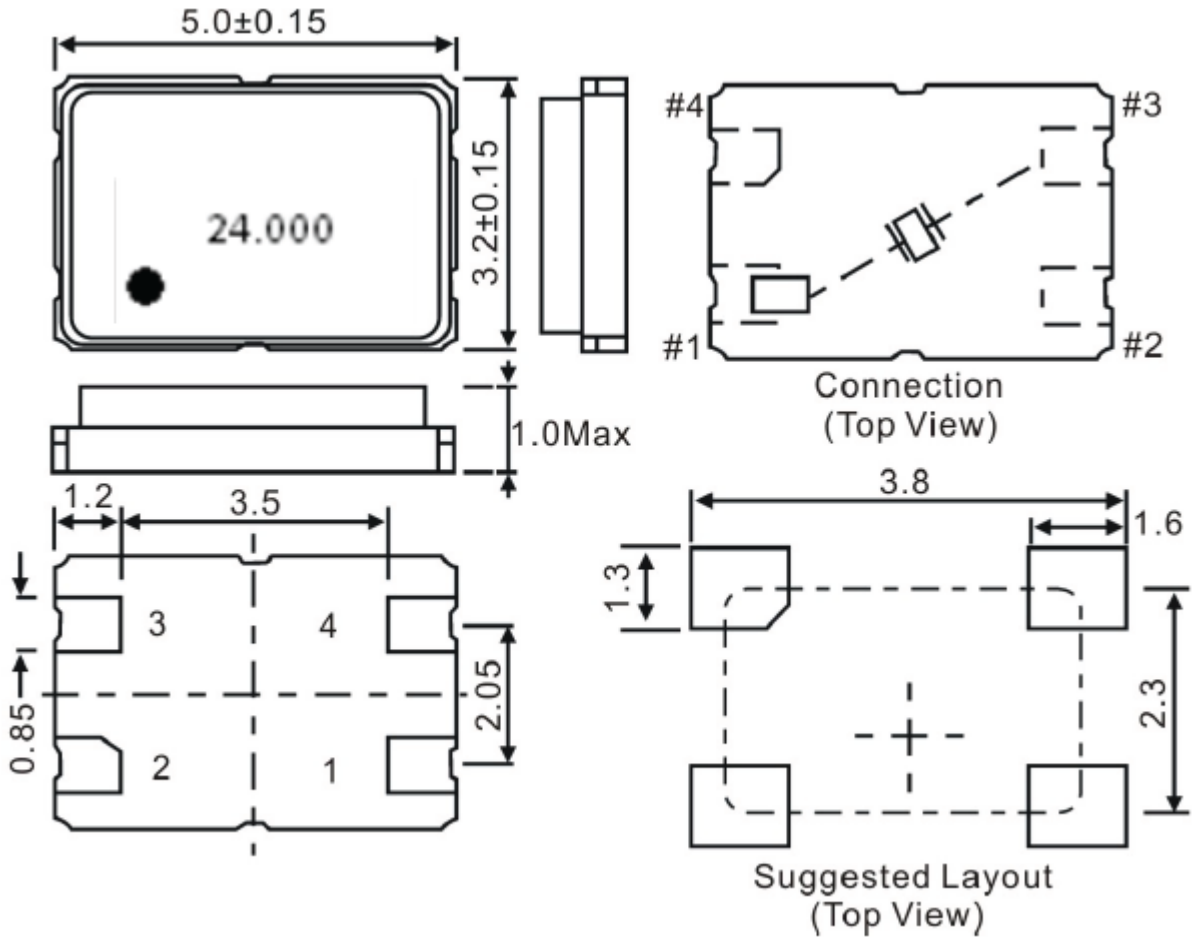

Note1: Tolerance ± 0.2 mm



3、Reflow Soldering Curve (RoHS)

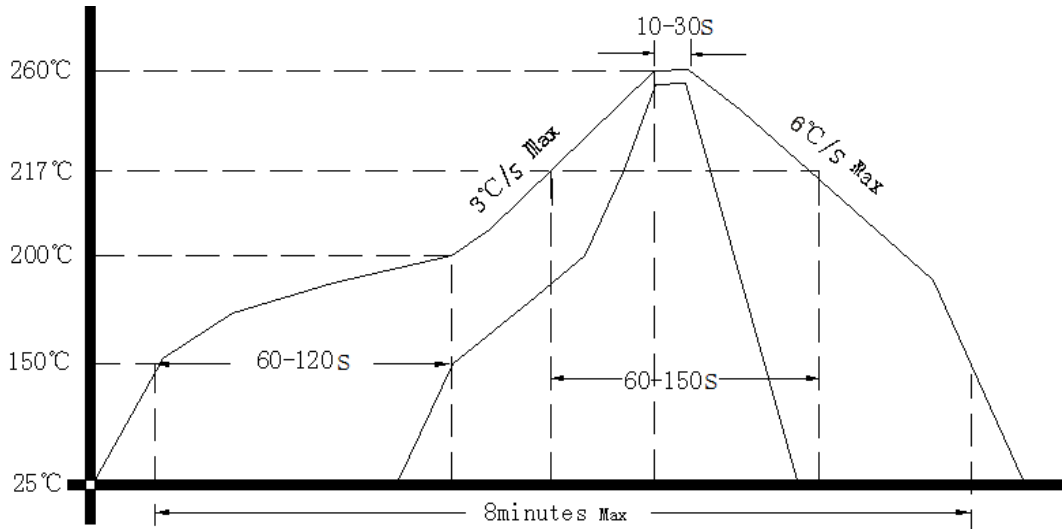

4、Package: Tape & Reel (mm)

